




东莞市地安电子科技有限公司
DONGGUAN CITY DIERAN ELECTRONICS CO.,LTD

REVISION RECORD

REV.	DESCRIPTION	ECN NO.	APPROVED	DATE

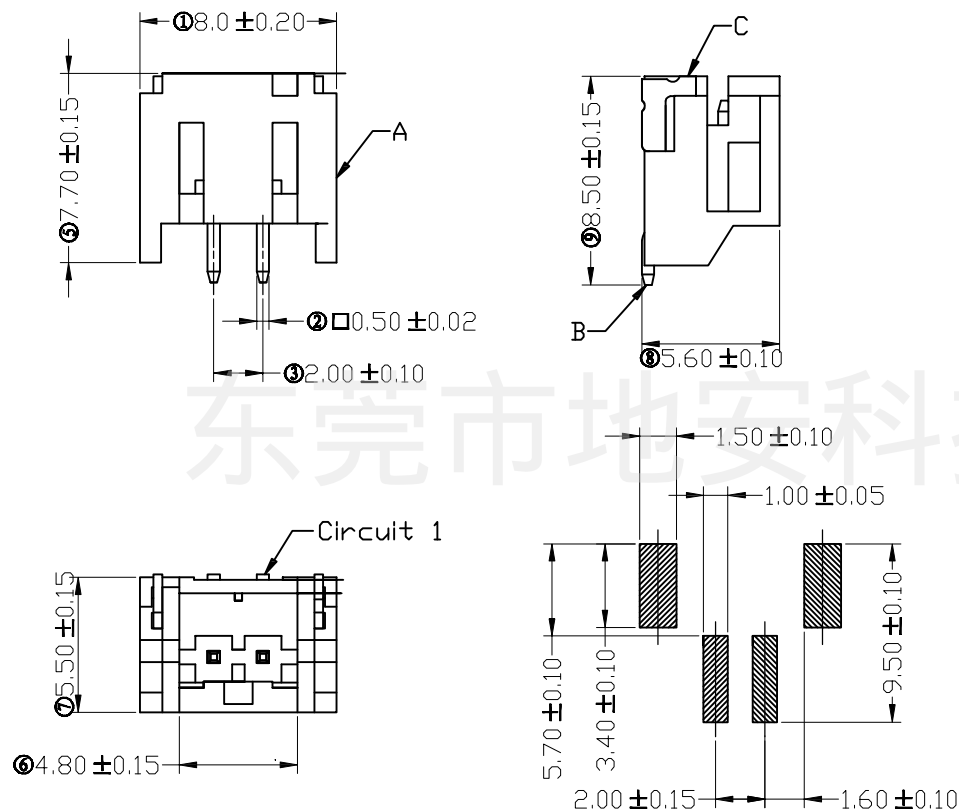

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

项目/参数

额定电压 (Rated Voltage) [V]	250
额定电流 (Rated Current) [A]	2
额定线经平方 (Wire Range mm ²)	0.05-0.2
额定线经线号 (Wire Range AWG)	30-24
冲击电压 Impulse withstand voltage	0.8 (KV)
绝缘材料 (Insulation Material)	LCP UL94V-0
导体材料 (Contactor Material)	磷铜 (Phosphor Copper)
导体表面镀层 (Contactive Coating)	镀锡 (Dumb tin)
间距 (Pitch) [mm]	2.0
级数 (Poles) [P]	2-32P
工作温度 (Operating temperatur) [°C]	-25°C ~ +105°C
焊锡温度 (Soldering temperature) [°C]	250°C / 3S

linear dimension (Tolerances Standard GB/T 14486-2008)

variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to	over 10 to 100	over 100 to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	1:1	第三视角/THIRD ANGLE PROJECTION	版本/REV	V0
东莞市地安电子科技有限公司						名称/TITLE	DA2050-2.0WT/LT	