
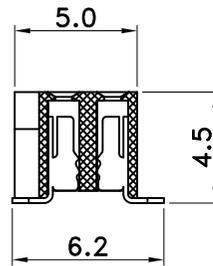
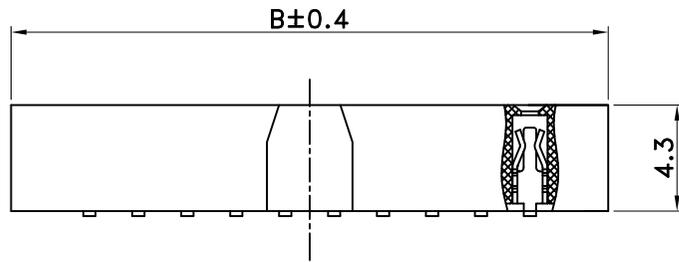


Recommended PCB Layout
General Tolerances ± 0.05

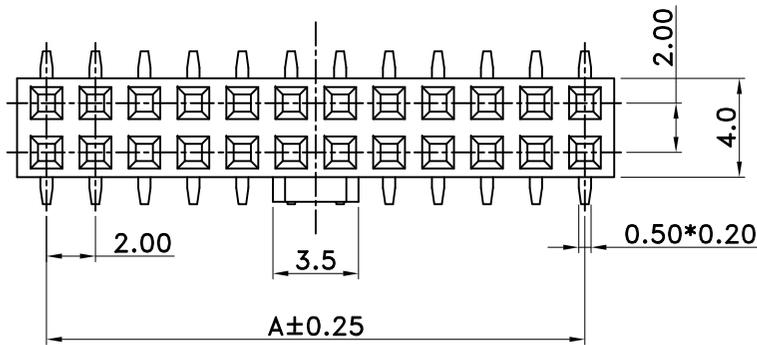

■ SPECIFICATIONS

- Voltage Rating : 125V AC/DC
- Current Rating : 2A AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000M Ω min.
- Temperature Range : -40°C to +105°C
- Contact Resistance : 20m Ω max.

■ FEMALE HEADER

- Part No. : GJS-1193SM3G31B-XX X /X
Product Code : ① ② ③

- ① Poles : 04~80
- ② Base : Blank : Nylon 6T UL94V-0
9T : Nylon 9T UL94V-0
- ③ Packing: /A :Tube<常規品>
/R :Reel+麥拉

- Material : 1. Contact : Phosphor Bronze, Gold Flash
2. Base : Refer The Above Options

Ploes	Dimenslons (mm)		Ploes	Dimenslons (mm)	
	A	B		A	B
04	2.00	4.40	44	42.00	44.40
06	4.00	6.40	46	44.00	46.40
08	6.00	8.40	48	46.00	48.40
10	8.00	10.40	50	48.00	50.40
12	10.00	12.40	52	50.00	52.40
14	12.00	14.40	54	52.00	54.40
16	14.00	16.40	56	54.00	56.40
18	16.00	18.40	58	56.00	58.40
20	18.00	20.40	60	58.00	60.40
22	20.00	22.40	62	60.00	62.40
24	22.00	24.40	64	62.00	64.40
26	24.00	26.40	66	64.00	66.40
28	26.00	28.40	68	66.00	68.40
30	28.00	30.40	70	68.00	70.40
32	30.00	32.40	72	70.00	72.40
34	32.00	34.40	74	72.00	74.40
36	34.00	36.40	76	74.00	76.40
38	36.00	38.40	78	76.00	78.40
40	38.00	40.40	80	78.00	80.40
42	40.00	42.40			




东莞乔唯电子有限公司
DONGGUAN CHYAO WEI
ELECTRONIC CO., LTD






APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
張育瑞	1:1	mm	.0 ±0.30	△				△			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	△				△			
曾慶根	⊕	a	.000 ±0.10	△				△			
DRAWN BY	DATE	SIZE	ANGLE	△					CUSTOMER		
曾慶根	2020/09/04	A4	0° ±1°	△					Conforms to The RoHS Instruction		
			.0° ±	△							
			SHEET 1/1	△							

PART NO GJS-1193SM3G31B-XXX(XX)

2.00mm Dual Row with Bump, Board to Board Connector

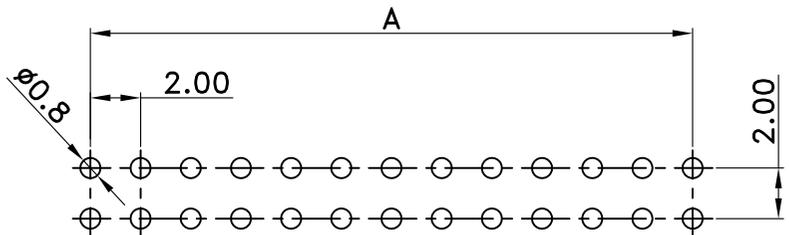

Recommended PCB Layout
General Tolerance ± 0.05

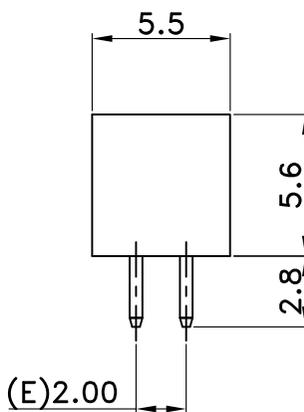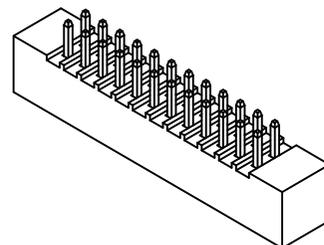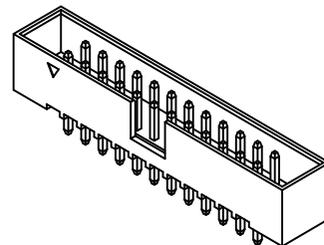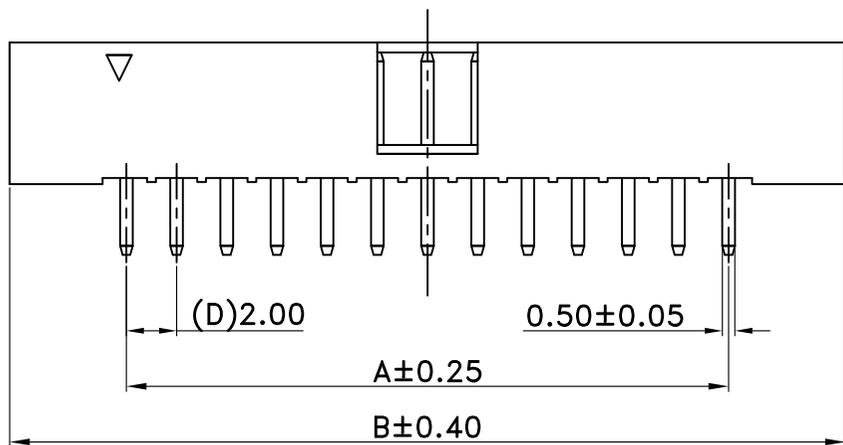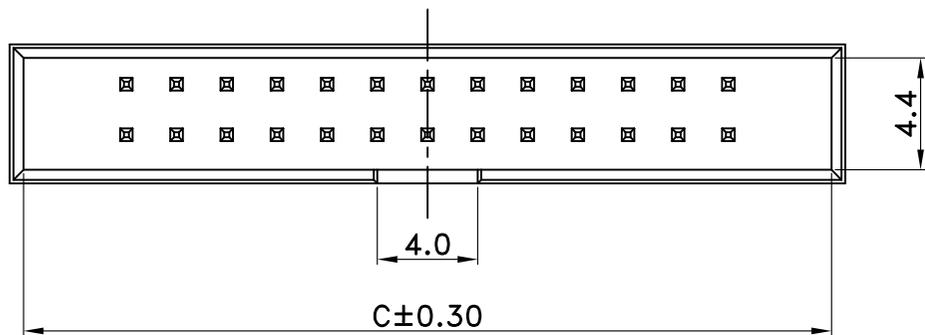

■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 2A AC/DC
- Withstanding Voltage : 1,000V AC/minute
- Insulation Resistance : 1,000M Ω min
- Temperature Range : - 40 $^{\circ}$ C to + 105 $^{\circ}$ C
- Contact Resistance : 20m Ω max

■ BOX HEADER(Straight)

- Part No. : GJS-13002-XX (XXX)
① ②

① Poles : 06~68

② Blank : Nylon 6T UL94V-0

PBT : PBT UL94V-0

Material :

1. Contact : Brass, Gold Flash
2. Base : Refer Above Options

- Package : PVC Box

Poles	Dimensions (mm)		
	A	B	C
06	4.00	13.30	12.20
08	6.00	15.30	14.20
10	8.00	17.30	16.20
12	10.00	19.30	18.20
14	12.00	21.30	20.20
16	14.00	23.30	22.20
18	16.00	25.30	24.20
20	18.00	27.30	26.20
22	20.00	29.30	28.20
24	22.00	31.30	30.20
26	24.00	33.30	32.20
28	26.00	35.30	34.20
30	28.00	37.30	36.20
32	30.00	39.30	38.20
34	32.00	41.30	40.20
36	34.00	43.30	42.20
40	38.00	47.30	46.20
44	42.00	51.30	50.20
50	48.00	57.30	56.20
60	58.00	67.30	66.20
64	62.00	71.30	70.20
68	66.00	75.30	74.20



东莞乔唯电子有限公司
DONGGUAN CHYAO WEI
ELECTRONIC CO., LTD

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
張育瑞		mm	.0 ±0.30	△							
CHECKED BY	PROJ	VER NO.	.00 ±0.20	△							
曾慶根		a0	.000 ±0.10	△							
			ANGLE	△							
			0° ±1°	△							
			.0° ±	△							
			SHEET 1/1	△							

PART NO GJS-13002-XX(XXX)

2.00mm Flat Cable to Board Connector, DIP Series

曾慶根

DATE

SIZE

曾慶根

2018/05/08

A4

CUSTOMER

Conforms to The RoHS Instruction