



APPEARANCE



SOD-523 (Top View)

PIN CONFIGURATION



Pin configuration (Top view)

Descriptions

The APED12M3.6-52 is a Bi-directional transient voltage suppressor (TVS) to protect sensitive electronic components from electrostatic discharge (ESD). It is particularly well-suited for cellular phones, PMP , MID, PDA, digital cameras and other electronic quipment. The XYED12M3.6-52 is safely dissipating ESD strikes to meet the ESD immunity testing of IEC61000-4-2 ($\pm 30KV$).


The XYED12M3.6-52 is available in SOD-523 package. Standard products are Pb - free and Halogen-free.

Order information

Device	Package	Shipping
XYED12M3.6-52	SOD-523	3000/Tape&Reel

Electrical Parameters (T=25°C)

Symbol	Parameter
VRWM	Reverse Stand-off Voltage
IR	Reverse Leakage Current @ VRWM
VBR	Reverse Breakdown Voltage @ IT
IT	Test Current
IPP	Reverse Peak Pulse Current
VC	Clamping Voltage @ IPP

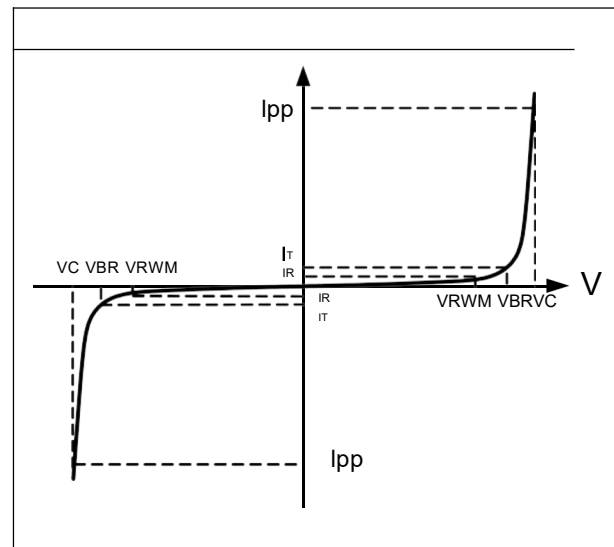


Absolute maximum ratings

Parameter	Symbol	Rating	Unit
Peak pulse power (tp = 8/20μs)	Ppk	95	W
Peak pulse current (tp = 8/20μs)	I _{PP}	3.6	A
ESD according to IEC61000-4-2 air discharge	V _{ESD}	±30	kV
ESD according to IEC61000-4-2 contact discharge		±30	kV
Junction temperature	T _J	150	°C
Operating temperature	T _{OP}	-55~125	°C
Storage temperature	T _{STG}	-55~150	°C


Electronics characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min	Typ	Max	Units
Reverse Stand-off Voltage	VRWM				12	V
Reverse Breakdown Voltage	VBR	I _t =1mA	13.5	14.5	16	V
Reverse Leakage Current	I _R	VRWM=±12V			0.1	uA
Clamping Voltage	V _C	I _{pp} =3.6A, tp=8/20us			27	V
Junction Capacitance	C _j	VR=0V, f=1MHz		11		pF


Typical characteristics (Ta=25°C)

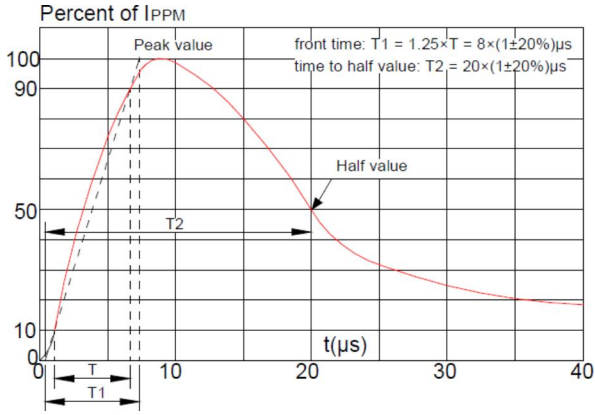

Pulse Waveform (8/20us)

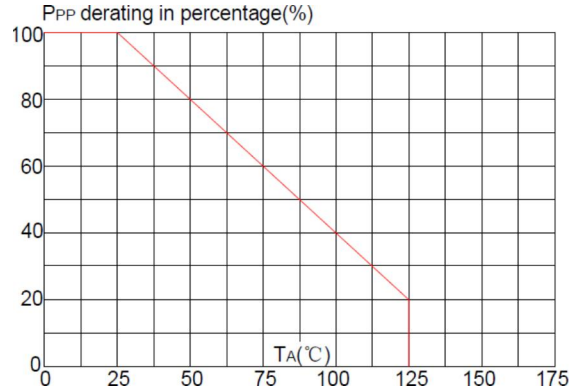


Pulse Derating Curve

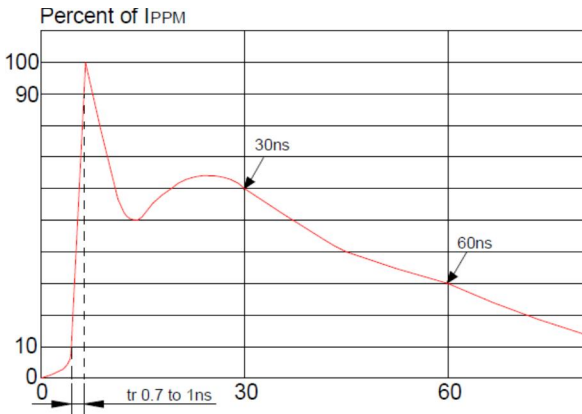


ESD Clamping(8kV Contact Discharge)


PACKAGE OUTLINE DIMENSIONS(SOD-523)

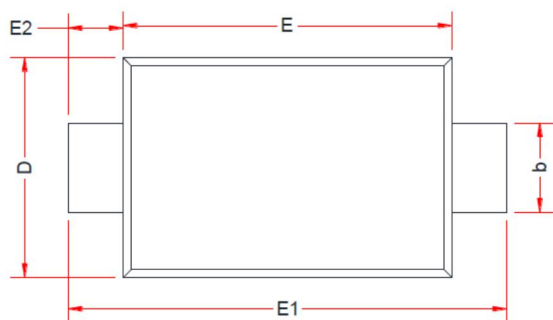

TOP VIEW



SIDE VIEW

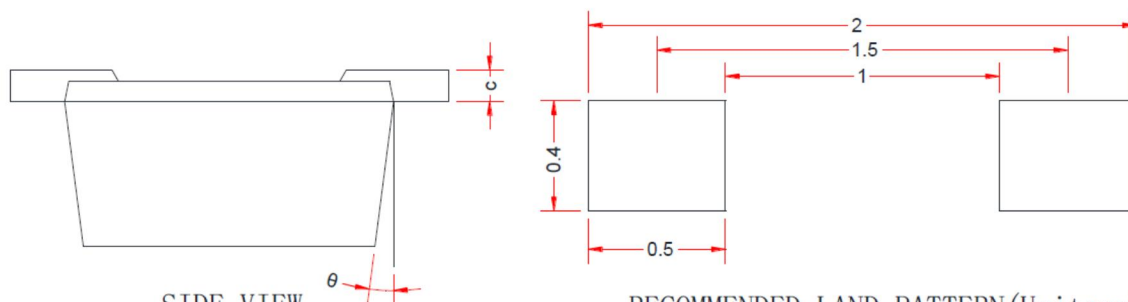

SIDE VIEW

RECOMMENDED LAND PATTERN (Unit:mm)

Symbol	Dimensions in Millimeters		
	Min.	Typ.	Max.
A	0.51	-	0.77
A1	0.50	0.60	0.70
b	0.25	-	0.40
c	0.08	-	0.15
D	0.75	0.80	0.85
E	1.10	1.20	1.30
E1	1.50	1.60	1.70
E2	0.20 Ref.		
θ	7 °C Ref.		

Note:
This recommended land pattern is for reference purpose only.