


1. 未標尺寸均以2D圖樣加工
2. 外觀邊沿未標注倒角均以C0.3加工
3. 所有圓弧倒角須清角至R<0.03

放電區域按3D形狀做電極，表面要求VDI-10
(按照沙迪克比對板，Ra0.31)

REV.	ECN NO. / DESCRIPTION	DATE
1		09/19'20

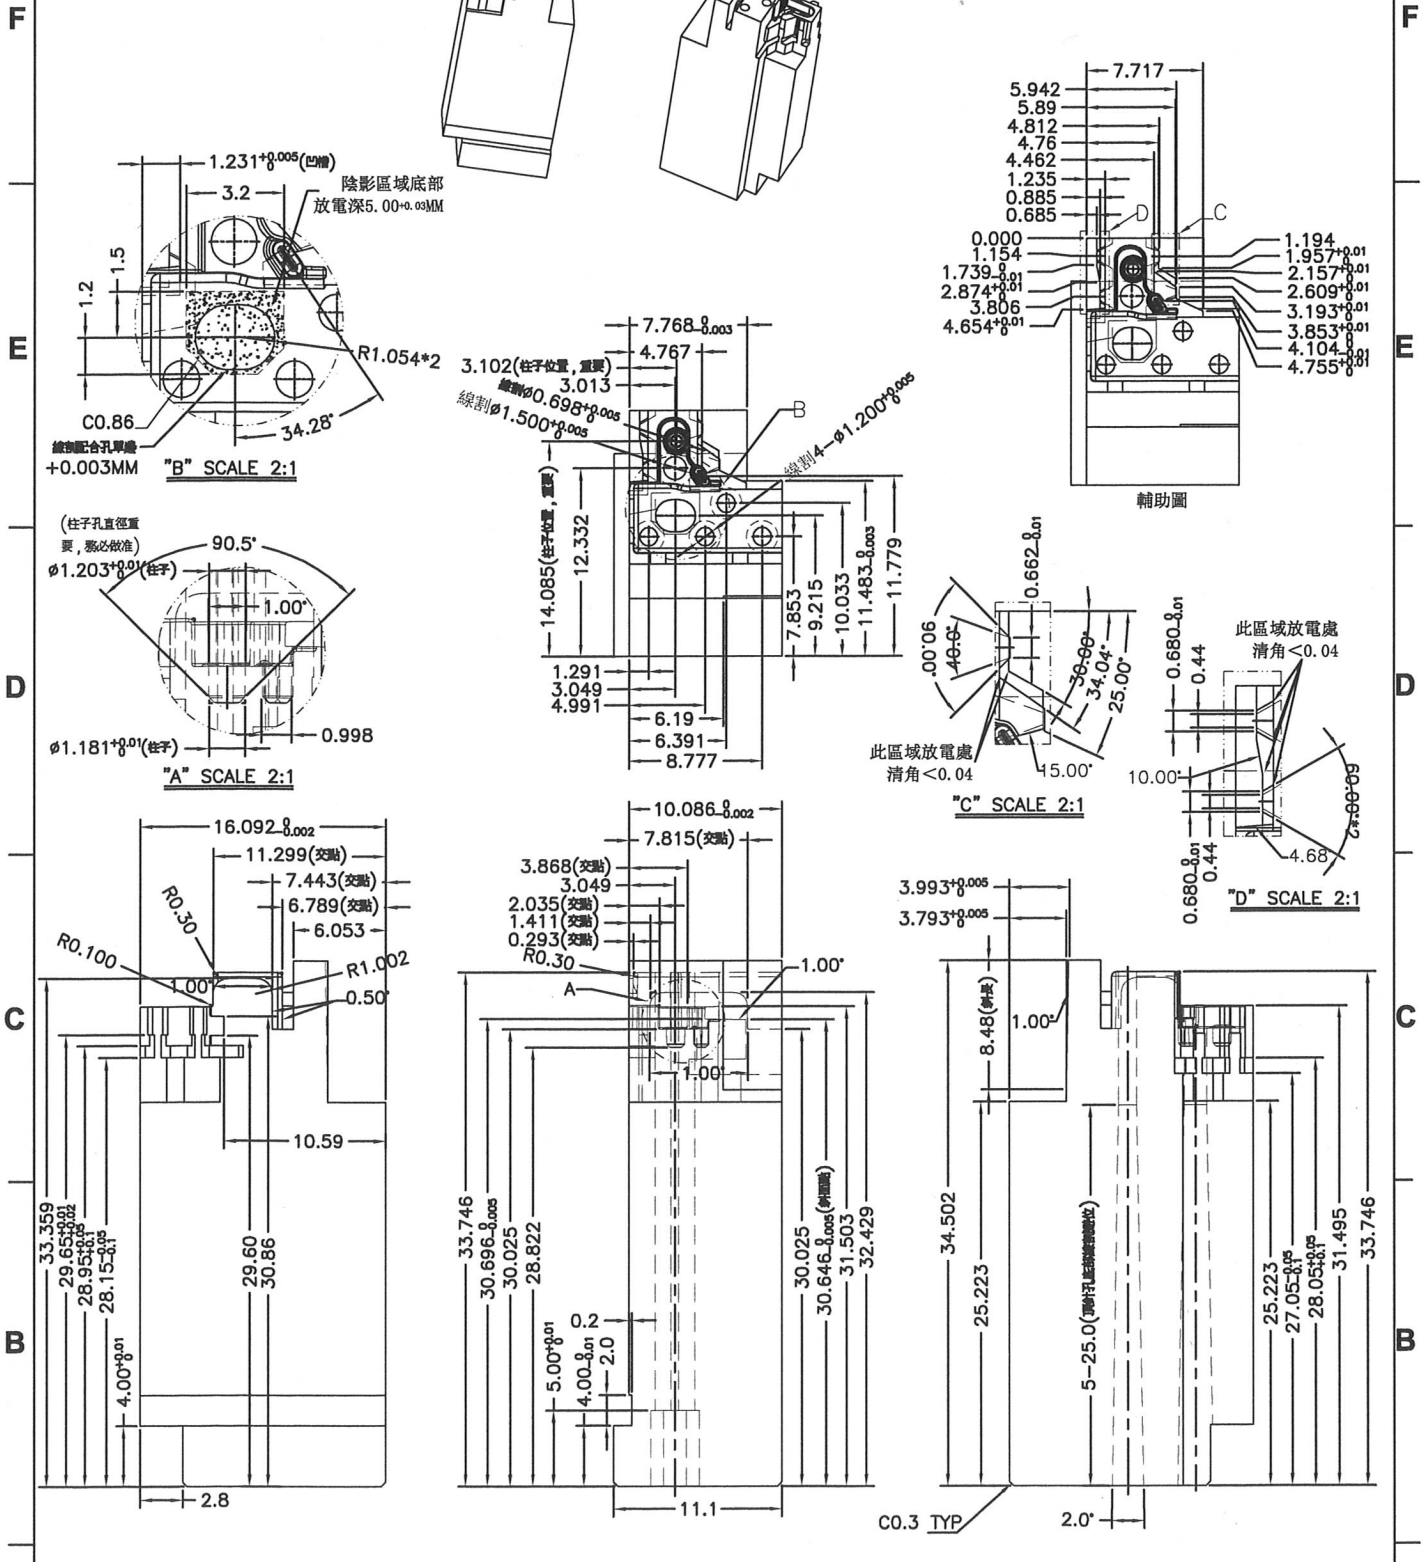

GENERAL TOLERANCES UNLESS SPECIFIED		MATERIAL	PART NO.	CAYMAN MOULD TECH. CO.,LTD		
		UNIMAX	BSM0100-P001A			
LINEAR	ANGLE	FINISH	APPROVED BY	TITLE		
.X ±0.05	X.°±1°	HRC56~58°		B820 Header IM Injection Mould		
.XX ±0.01	.X°±0.5°	UNITS	CHECKED BY	DWG NO.		
.XXX ±0.005	.XX°±0.1°	MM		204		
.XXXX ±0.002	.XXX°±0.05°	SIZE	QTY	DRAWN BY	SHEET	SCALE
		A4	4		1/	11:0.4
					REV	
					1	

1

2

3

4