

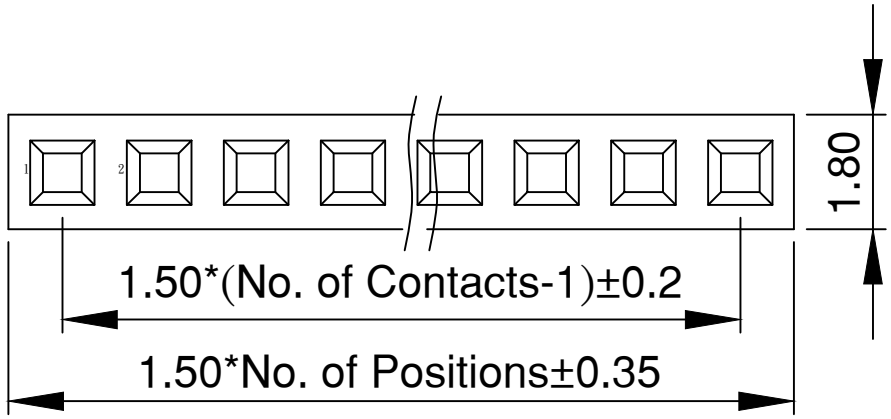


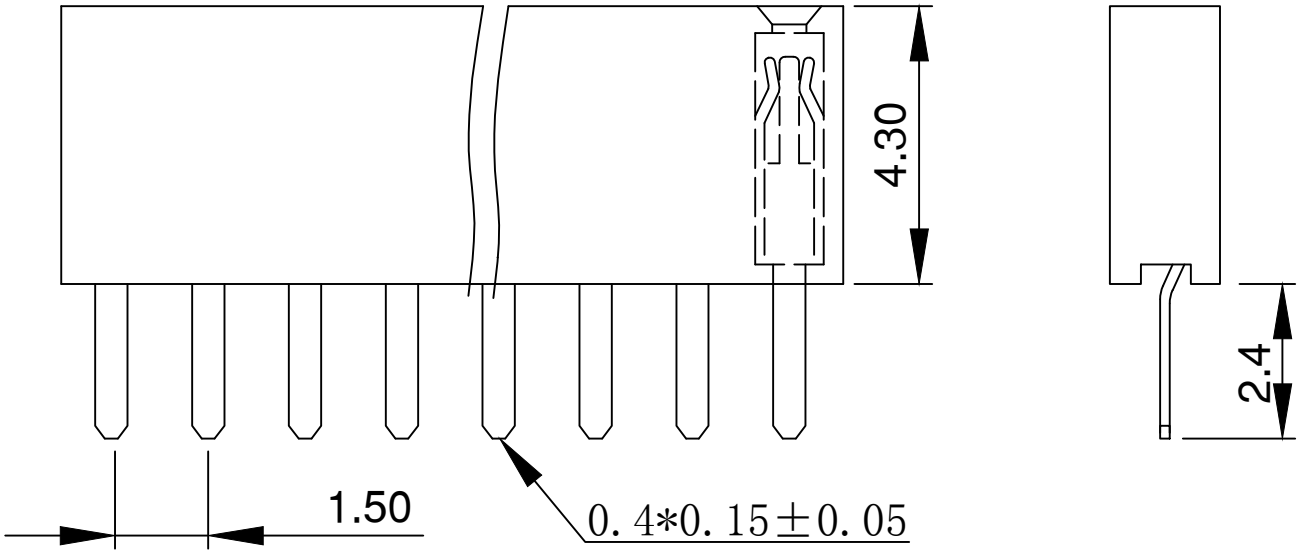

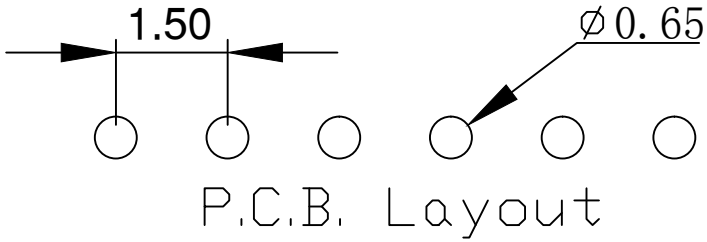

Specifications

Current Rating	:1 Amp
Insulator Resistance	:1000 Megohms Min.
Contact Resistance	:20 m ohms max.
Dielectric Withstanding	:AC 500 V
Operating Temperature	:-40°C ～ +105℃
Soldering Temperature	:260℃ for 3～5sec Max.
Contact Material	:Phosphor Bronze
Insulator Material	:Polyester,UL 94V-0
Standard	:PA6T/LCP (Black)
Standard	:Gold Flash all over

M F 150B V1 X X -1 XX - X
① ② ③ ④⑤ ⑥ ⑦ ⑧

① Female Header series
② Pitch
③ RX-R/A VX-Straight SX:SMT
④ Plating-G:Gold Flash 2:2u"Gold 3:3u"Gold.....
T: Tin
⑤ Plastic material-C:LCP N:PA6T
⑥ Row number-1: single 2: Double row .....
⑦ Number of Contactsy(2P--10P)
⑧ G:Tray T:Tubl

X. ±0.5	X.° ±3°	UNITS mm	NAME(INTENDED USE): 1.50mm PCB
.X ±0.3	.X° ±2°	MAT'L	DWG NO.: M150V0001
.XX ±0.2	.XX° ±1°	FINISH	APPD:
.XXX ±0.1	.XXX° ±0.5°	Q'TY 1	CHKD:
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MING HONG EIECTRON			DR: JEERY

东莞市铭发电子有限公司

TITLE: **1.50mm Female Header** 180
W:1.8mm H:4.3 (RoHS)

PART NO. MF150BV1XX-1XX-X

SCALE	SHEET	REV.
1/1	1/1	B