
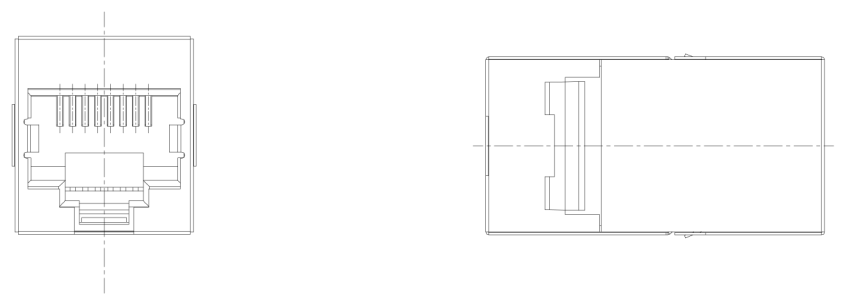


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	8p8c 转接头	US88-X011

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	New Release	GMC	2008.04.27

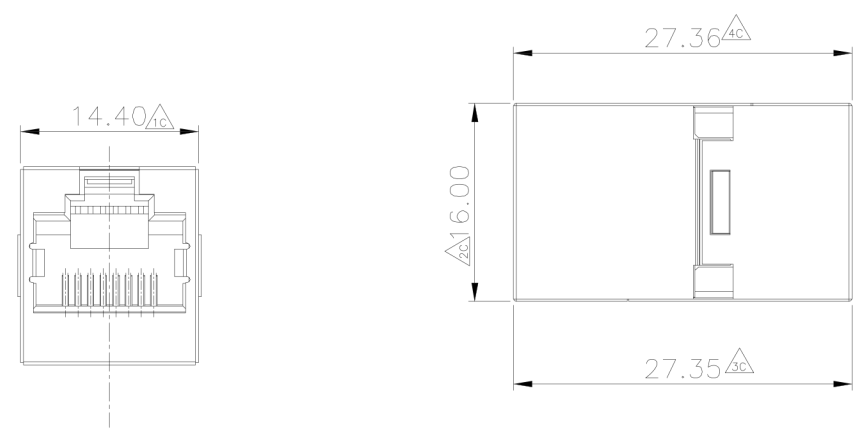

**Electrical:**  
 1.Voltage Rating:125 Vac Rms.  
 2.Current Rating:1.5 Amp.  
 3.Contact Resistance:40 Milliohms Max.  
 4.Insulation Resistance:1000 Megohms Min @500 Vdc.  
 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

**Mechanical:**  
 1.Operating:750 Cycles Min.

**Environmental:**  
 1.Storage:-40°C To +85°C.  
 2.Opertion:-20°C To +75°C.  
 Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

**Materials:**  
 Shielded: Stainless Steel.  
 Plastic Housing: Engineering Thermoplastic  
 Flammability Rating UL 94V-0.  
 Contacts: Thickness Phosphor Bronze  
 Plating: Gold Plating Over Nickel In Contact.

Part No.: US88-X011

Material & Plating

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating
5	Au 50u" Plating

 **贵州省合曜电子科技有限公司**  
 GuiZhouSheng HeYao Electronic Technology Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE:1/1	UNIT: mm		DWG.NO:
	SIZE: A3	PAGE:1 OF 1	REV:A01	WI-061-751
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2	ANGLES: X :±2° X.X :±1°	APPROVED BY	CHECKED BY	PREPARED BY
		TONY	WZ	WZ
<b>CUSTOMER COPY</b>				