





CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 1*1 Port, 8P8C	MJ3288-BX11-RN

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	WZ	2010.02.02

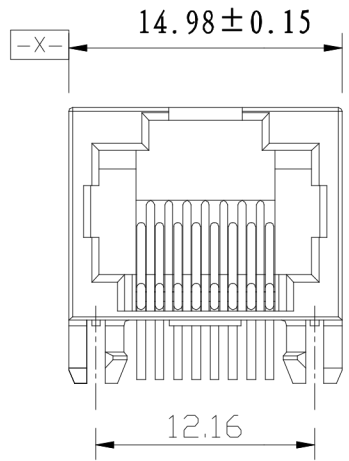

SPECIFICATIONS:

- 1: VOLTAGE: 150V AC RMS
- 2: CURRENT RATING: 1.5A
- 3: CONTACT RESISTANCE: 30mΩ MAX.
- 4: INSULATION RESISTANCE: 500MΩ MIN.
- 5: DIELECTRIC WITHSTAND VOLTAGE: 1000V AC
- 6: OPERATION TEMPERATURE: -40°C~80°C
- 7: DURABILITY: 500 MATING CYCLES MIN.

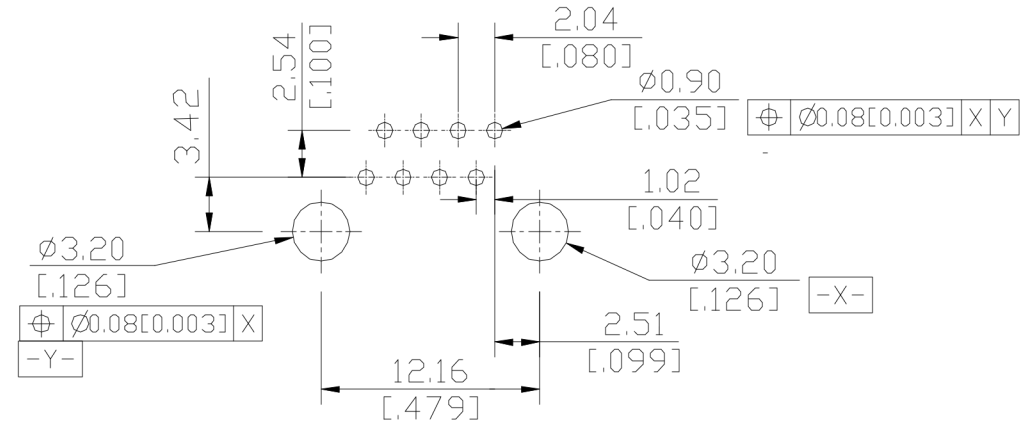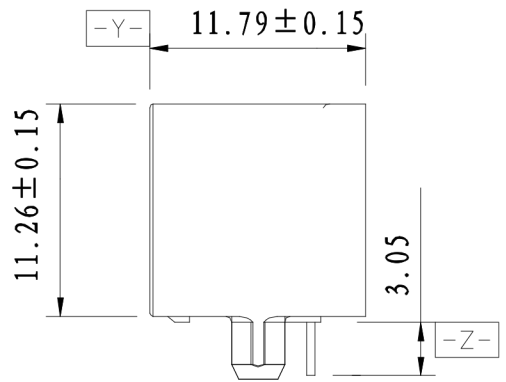

MJ3288-BX11-RN

Material & Plating

Table 1	X	Terminal Plating
	0	Gold Flash Plating
	1	Au 3u" Plating
	2	Au 6u" Plating

RECOMMENDED PCB LAYOUT

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
c	Shielding	1	Copper Alloy	Ni Plating	
b	Cover	1	Thermoplastic	Black	
a	Housing	1	Thermoplastic	Black	

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2

ANGLES: X :±2° X.X :±1°

贵州省合曜电子科技有限公司
GuiZhouSheng HeYao Electronic Technology Co.,Ltd

SCALE:1/1	UNIT: mm	DWG.NO:	
SIZE: A4	PAGE:1 OF 1	REV:A02	
APPROVED BY	CHECKED BY	PREPARED BY	
TONY	WZ	WZ	
CUSTOMER COPY			