


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 1*1 Port, SMT TYPE	MJ88-BX11-RNS1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A1		New Release	WZ	2008.03.13

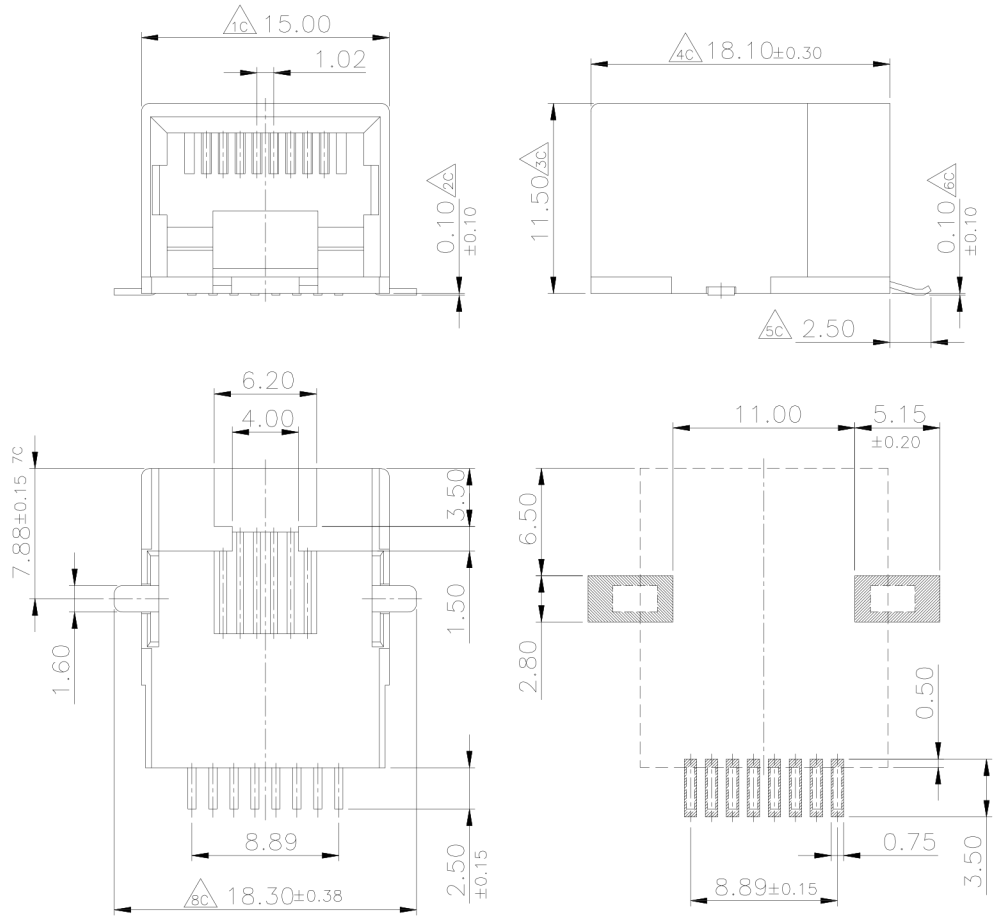

**SPECIFICATION**

- CURRENT RATING: 1.5AMPS
- VOLTAGE RATING: 125V AC
- INSULATION RESISTANCE: 500MΩ MIN.
- WITHSTAND VOLTAGE: AC1000V RMS 50Hz or 60Hz MIN.
- CONTACT RESISTANCE: 30mΩ MAX.
- DURABILITY: 750 MATING CYCLES
- OPERATING TEMPERATURE: -25°C~+70°C

PART NO.:  
MJ88-BX11-RNS1

**Material & Plating**

Table 1	X	Terminal Plating
	0	Au 1u" Plating
	1	Au 3u" Plating
	2	Au 6u" Plating
	3	Au 15u" Plating
	4	Au 30u" Plating
	5	Au 50u" Plating

**MATERIALS:**  
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0.  
 CONTACTS: PHOSPHOR BRONZE  
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT.  
 TIN PLATING OVER NICKEL IN SOLDER AREA.

 **贵州省合曜电子科技有限公司**  
 GuiZhouSheng HeYao Electronic Technology Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE: 1/1	UNIT: mm	DWG. NO:	
	SIZE: A3	PAGE: 1 OF 1	REV: R01	
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2	ANGLES: X :±2° X.X :±1'	APPROVED BY	CHECKED BY	PREPARED BY
		DICK	XYJ	WZ
<b>CUSTOMER COPY</b>				