
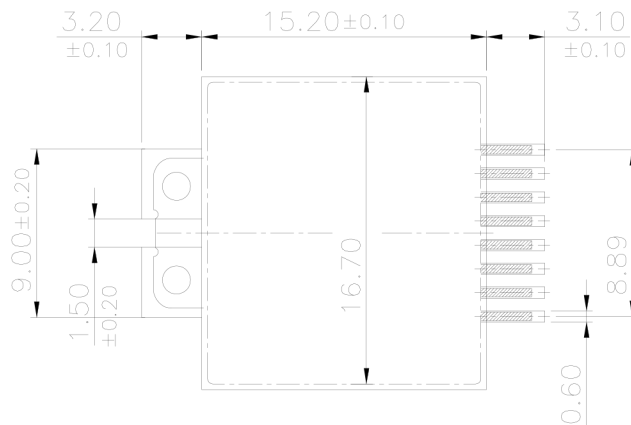


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 8P8C, SMT	MJ88-BX11-JPS1



REV.	ECN NO	DESCRIPTION	REVISED	DATE
R01		新訂圖面	WZ	2010.04.13

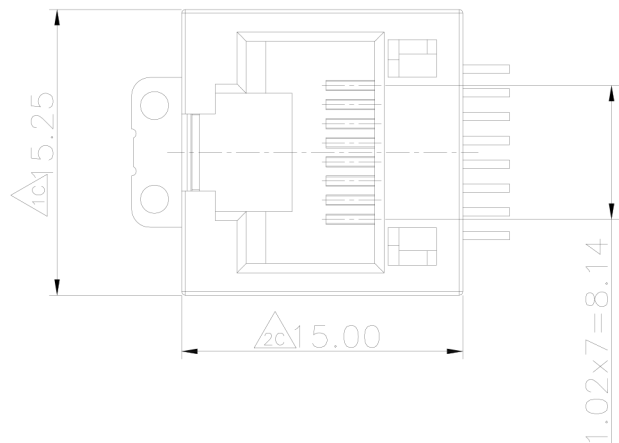

PCB LAYOUT/TOP VIEW

SPECIFICATION

- CURRENT RATING: 1.5AMPS
- VOLTAGE RATING: 125V AC
- INSULATION RESISTANCE: 500MΩ MIN.
- WITHSTAND VOLTAGE: AC1000V RMS 50Hz or 60Hz MIN.
- CONTACT RESISTANCE: 30mΩ MAX.
- DURABILITY: 750 MATING CYCLES
- OPERATING TEMPERATURE: -25°C~+70°C

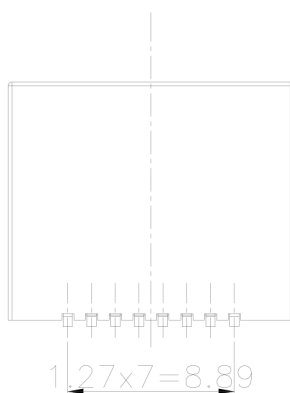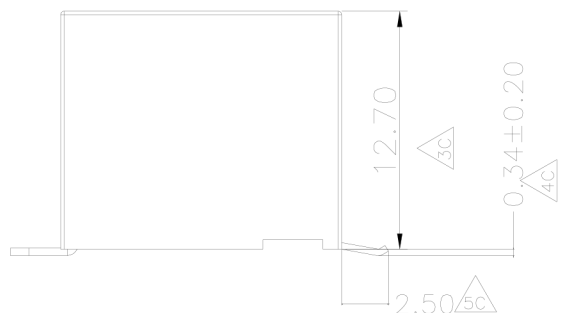

MJ88-BX11-JPS1

X	Terminal Plating
3	3u"
6	6u"
7	15u"

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
c	ME	1	Brass, T=0.3mm	NI Plating	
b	Terminal	8	Phosphor Broze, T=0.35mm	See Table 1	
a	Housing	1	PA9T UL94V-0	BLACK	

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE: 1/1	UNIT: mm	DWG.NO:	
	SIZE: A3	PAGE: 1 OF 1	REV: R01	
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2	ANGLES: X :±2° X.X :±1°	APPROVED BY	CHECKED BY	PREPARED BY
		TONY	WZ	WZ
CUSTOMER COPY				

**贵州省合曜电子科技有限公司**  
GuiZhouSheng HeYao Electronic Technology Co.,Ltd