
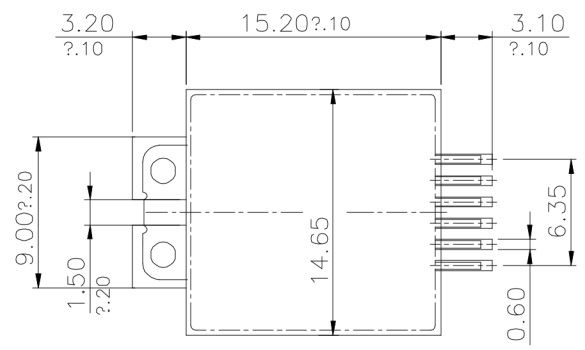

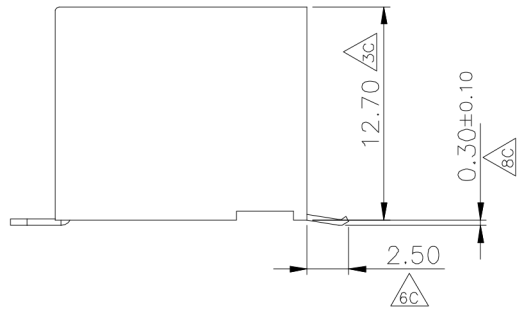


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 6P6C, SMT	MJ66-BX11-JPNS1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
R01		新訂圖面	WZ	2010.04.13

SPECIFICATION
 1.CURRENT RATING: 1.5AMPS
 2.VOLTAGE RATING: 125V AC
 3.INSULATION RESISTANCE: 500MΩ MIN.
 4.WITHSTAND VOLTAGE:
 AC1000V RMS 50Hz or 60Hz MIN.
 5.CONTACT RESISTANCE:30mΩ MAX.
 6.DURABILITY: 750 MATING CYCLES
 7.OPERATING TEMPERATURE: -25°C~+70°C

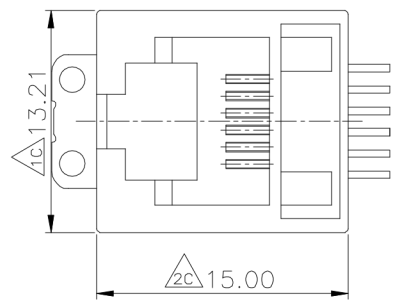

PCB LAYOUT/TOP VIEW

MJ66-BX11-JPNS1

X	Terminal Plating
3	3u"
6	6u"
7	15u"

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
c	ME	1	Brass, T=0.3mm	Ni Plating	
b	Terminal	6	Phosphor Broze, T=0.35mm	See Table 1	
a	Housing	1	HTNFR52 UL94V-0	BLACK	

UNLESS OTHERWISE SPECIFIED TOLERANCES

SCALE: 1/1 UNIT: mm

SIZE: A3 PAGE: 1 OF 1 REV: R01

APPROVED BY: TONY CHECKED BY: WZ PREPARED BY: WZ

CUSTOMER COPY

贵州省合曜电子科技有限公司
 GuiZhouSheng HeYao Electronic Technology Co.,Ltd