



CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 8P8C, R/A	MJ88-BX11-RV1



REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	XSY	2013.08.08

Specifications:

1. Rated Current: 1.5A
2. Contact resistance: 40mΩ MAX.
3. Insulation resistance: 500MΩ MIN.
4. Dielectric withstand: 500V AC for 1 minute
5. Operating temperature: -40°C~+80°C
6. Insertion/Extraction life: 750 Cycles



3D VIEW

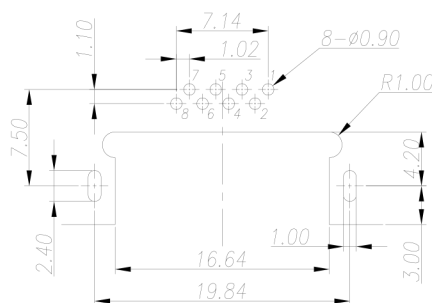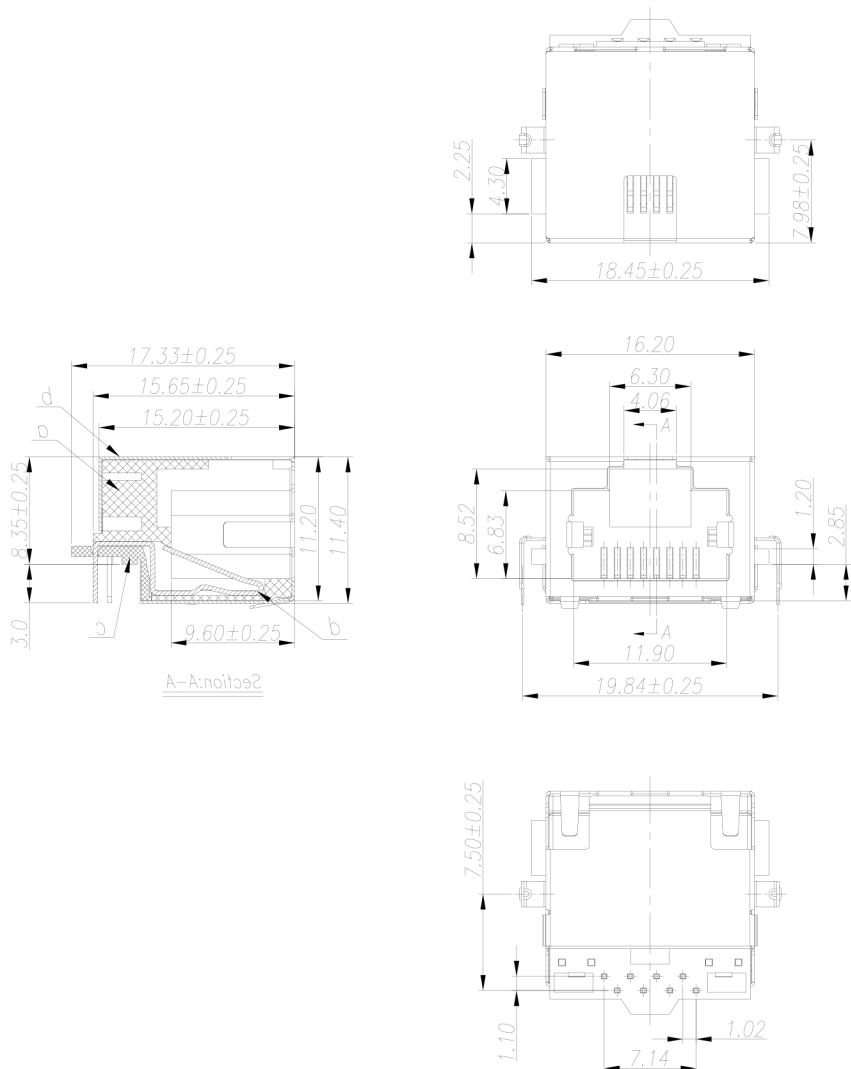

Part No.: MJ88-BX11-RV1

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating
5	Au 50u" Plating

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
d	Terminal	8	PHOSPHOR BRONZE T=0.35mm	See Table 1	
c	Cover	1	LCP GF30% UL94V-0	Black	
b	Shell	1	BRASS T=0.20mm	NI Plating	
a	Housing	1	LCP GF30% UL94V-0	Black	

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2
 ANGLES: X :±2° X.X :±1°

SCALE: 1/1	UNIT: mm	DWG.NO:	
SIZE: A4	PAGE: 10F1	REV: A01	
APPROVED BY	CHECKED BY	PREPARED BY	
		XSY	
CUSTOMER COPY			



贵州省合曜电子科技有限公司
GuiZhouSheng HeYao Electronic Technology Co., Ltd