

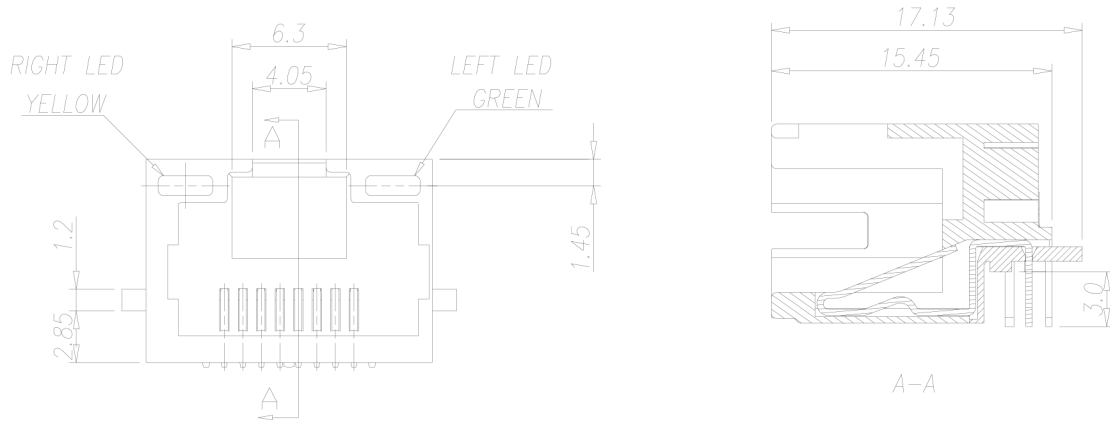


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 8P8C, R/A, With LED	MJ88-BX11-RNVL2

REV.	ECN NO	DESCRIPTION	REVISED	DATE
R01		New Release	Kelly	2010.08.12

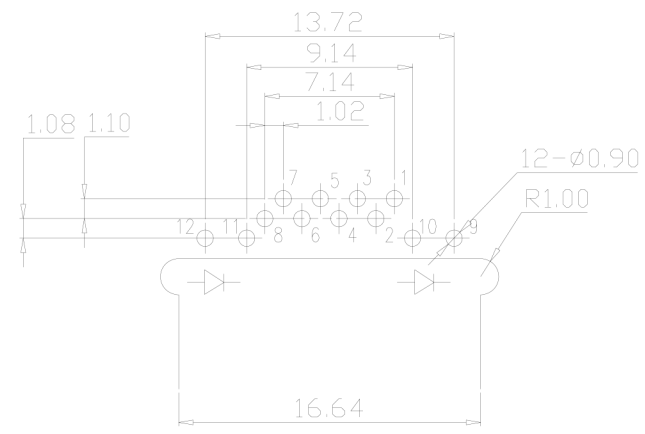

**SPECIFICATION**  
 1.CURRENT RATING: 1.5AMPS  
 2.VOLTAGE RATING: 125V AC  
 3.INSULATION RESISTANCE: 500MΩ MIN.  
 4.WITHSTAND VOLTAGE:  
 AC1000V RMS 50Hz or 60Hz MIN.  
 5.CONTACT RESISTANCE:30mΩ MAX.  
 6.DURABILITY: 750 MATING CYCLES  
 7.OPERATING TEMPERATURE: -25°C~+70°C

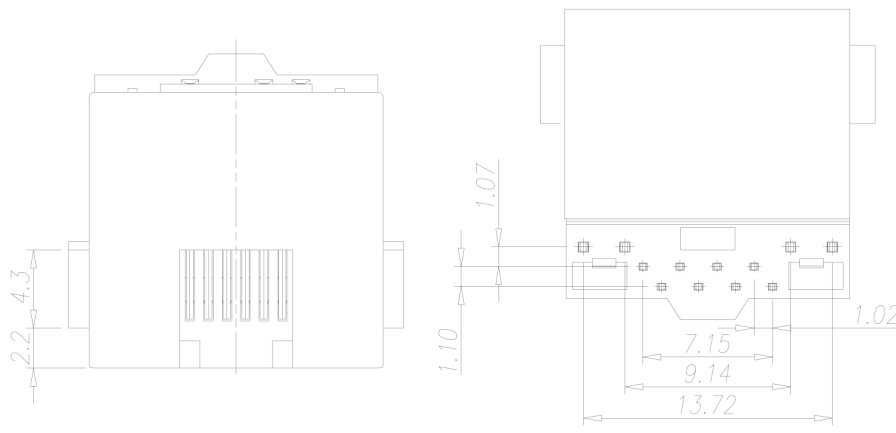


Recommend PCB Layout  
 Jack Top View  
 Tolerance: ±0.05mm  
 Recommend PCB Thickness: 1.6mm

Part No.:  
 MJ88-BX11-RNVL2

Table 1

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating
5	Au 50u" Plating

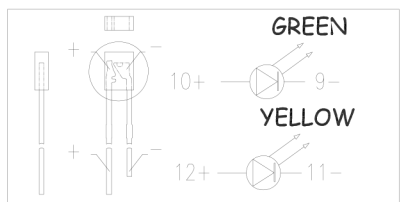

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
e	LED	1	LEFT	YELLOW	
d	LED	1	RIGHT	GREEN	
c	COVER	1	LCP+15%G.F UL94V-0	BLACK	
b	TERMINAL	8	PHOSPHOR BRONZE	GOLD FLASH PALTING	
a	HOUSING	1	LCP+15%G.F UL94V-0	BLACK	

UNLESS OTHERWISE SPECIFIED TOLERANCES

SCALE:1/1 UNIT: mm DWG.NO:

SIZE: A3 PAGE:1 OF 1 REV:R01

APPROVED BY	CHECKED BY	PREPARED BY
Tony	Bill	Kelly

CUSTOMER COPY

**贵州省合曜电子科技有限公司**  
 GuiZhouSheng HeYao Electronic Technology Co.,Ltd