

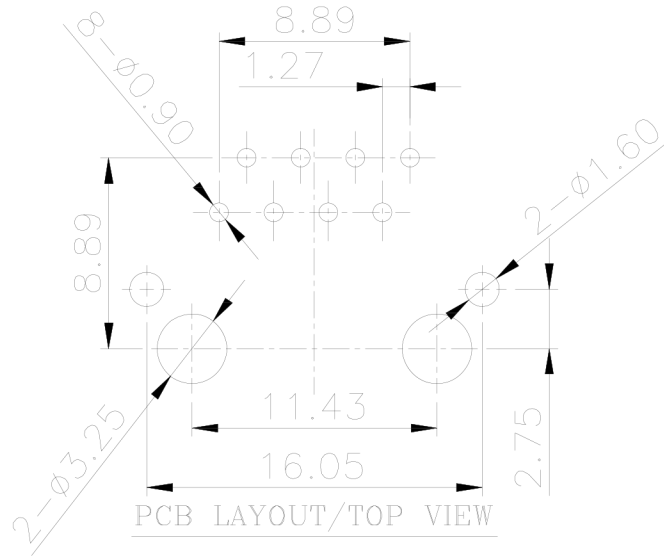
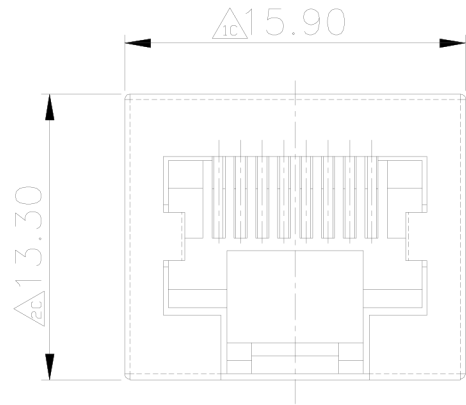
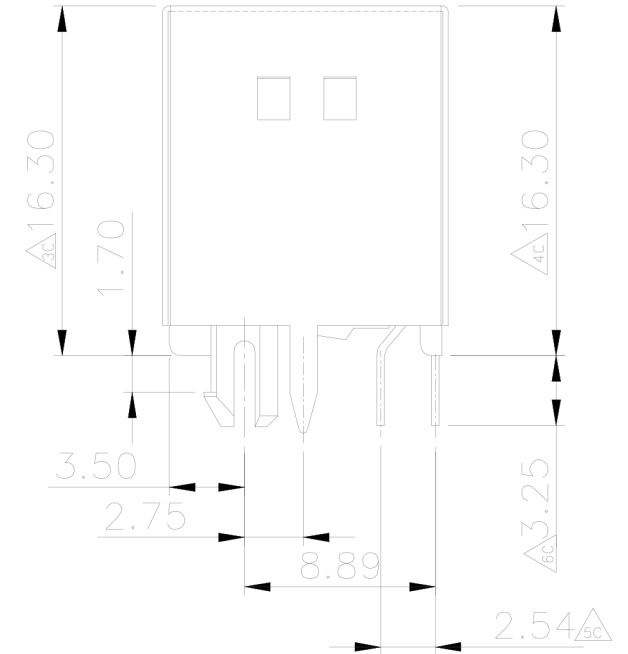



CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 8P8C, DIP180°	MJ88-B111-PS1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
R01		新訂圖面	WZ	2011.04.23

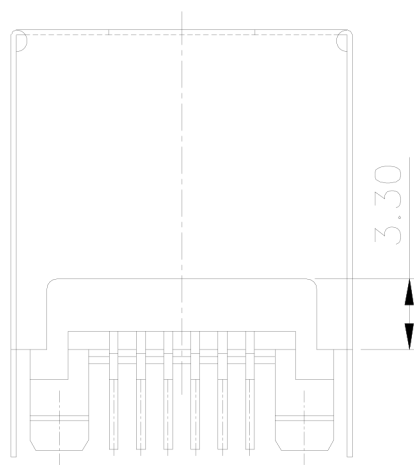

SPECIFICATION
 1.CURRENT RATING: 1.5AMPS
 2.VOLTAGE RATING: 125V AC
 3.INSULATION RESISTANCE: 500MΩ MIN.
 4.WITHSTAND VOLTAGE:
 AC1000V RMS 50Hz or 60Hz MIN.
 5.CONTACT RESISTANCE:30mΩ MAX.
 6.DURABILITY: 750 MATING CYCLES
 7.OPERATING TEMPERATURE: -25°C~+70°C

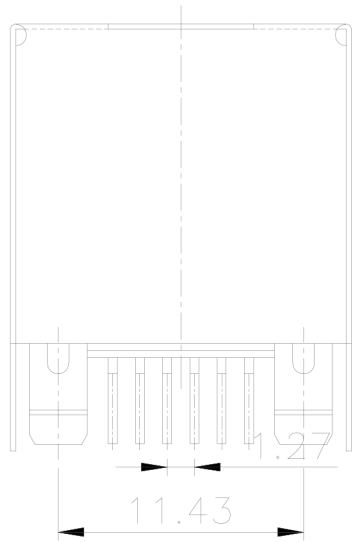

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
c	COVER	1	FR52+15%G.F UL94V-0	BLACK	
b	TERMINAL	8	PHOSPHOR BRONZE	GOLD FLASH PALTING	
a	HOUSING	1	FR52+15%G.F UL94V-0	BLACK	

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE:1/1	UNIT: mm		DWG.NO:
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2		SIZE: A3	PAGE:1 OF 1	REV:R01	
ANGLES: X :±2° X.X :±1°		APPROVED BY	CHECKED BY	PREPARED BY	
		TONY	WZ	WZ	
CUSTOMER COPY					

贵州省合曜电子科技有限公司
 GuiZhouSheng HeYao Electronic Technology Co.,Ltd