




| CATEGORY | DESCRIPTION | P/N # |
|-----------|-----------------------------|----------------|
| CONNECTOR | Modular Jack, 8P8C, 2X8PORT | MJ5988-BX28-RS |

| REV. | ECN NO | DESCRIPTION | REVISED | DATE |
|------|--------|-------------|---------|------------|
| A01 | | New Release | GMC | 2010.09.21 |

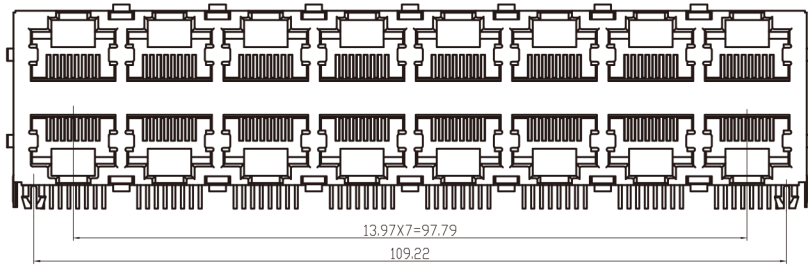

SPECIFICATIONS:

1. Voltage: 150V AC RMS
2. Current Rating: 1.5A
3. Contact Resistance: 30mΩ MAX.
4. Insulation Resistance: 500MΩ MIN.
5. Dielectric Withstang Voltage :1000V AC
6. Operature Temperature: -40°C~80°C
7. Durability: 500 Mating Cycles MIN.

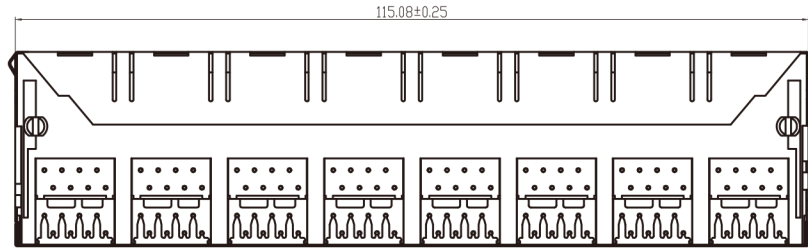


Part No.: MJ5988-BX28-RS

Material & Plating

Table 1

| X | Terminal Plating |
|---|------------------|
| 0 | Au 1u" Plating |
| 1 | Au 3u" Plating |
| 2 | Au 6u" Plating |
| 3 | Au 15u" Plating |
| 4 | Au 30u" Plating |
| 5 | Au 50u" Plating |

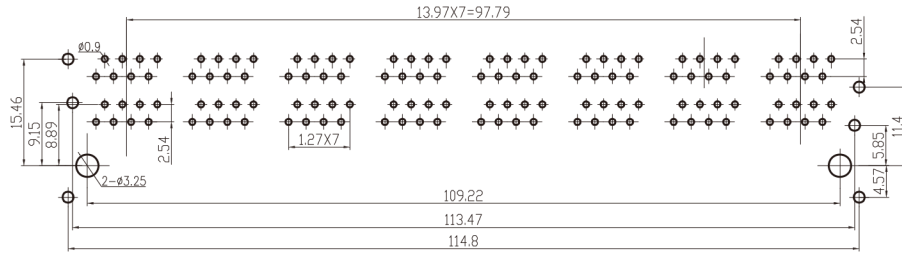

PC Board Layout

贵州省合曜电子科技有限公司
 GuiZhousheng HeYao Electronic Technology Co.,Ltd

| NO. | PART NAME | Q'TY | MATERIAL | PLATING & COLOR | Remark |
|-----|-----------|------|-----------------|------------------|--------|
| c | Shielding | 1 | Brass | Ni Plating | |
| b | Terminal | 8 | Phosphor Bronze | Terminal Plating | |
| a | Housing | 1 | PBT UL94V-0 | See Color Scheme | |

| | | | | | |
|---|-------------------------------|------------|-------------|-------------|------------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | SCALE:1/1 | UNIT: mm | | DWG.NO: |
| DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2 | ANGLES: X :±2° X.X :±1° | SIZE: A3 | PAGE:1 OF 1 | REV:A01 | WI-061-751 |
| APPROVED BY | | CHECKED BY | | PREPARED BY | |
| TONY | | WZ | | WZ | |
| CUSTOMER COPY | | | | | |