



| CATEGORY | DESCRIPTION | P/N # |
|-----------|-----------------------------------|------------------|
| CONNECTOR | Modular Jack, 8P8C, R/A, With LED | MJ5988-BX26-RSL1 |



| REV. | ECN NO | DESCRIPTION | REVISED | DATE |
|------|--------|-------------|---------|------------|
| A01 | | New Release | GMC | 2009.09.24 |

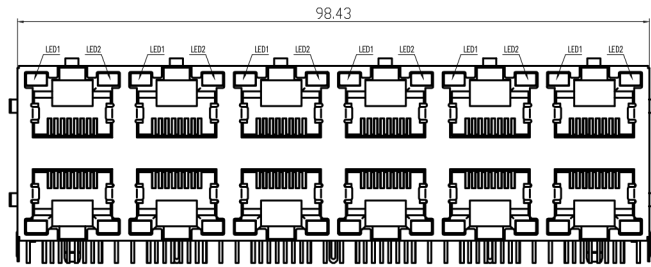

SPECIFICATIONS:

1. Voltage: 150V AC RMS
2. Current Rating: 1.5A
3. Contact Resistance: 30mΩ MAX.
4. Insulation Resistance: 500MΩ MIN.
5. Dielectric Withstang Voltage :1000V AC
6. Operature Temperature: -40°C~80°C
7. Durability: 500 Mating Cycles MIN.

Part No.: MJ5988-BX26-RSL1

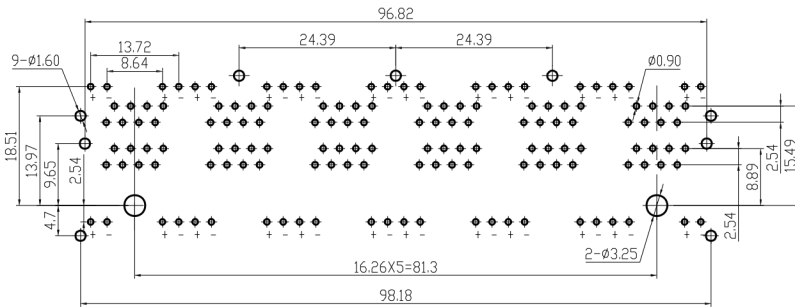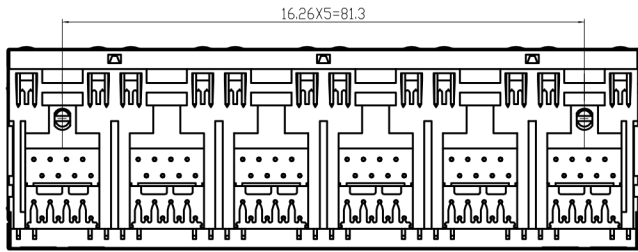

PC Board Layout

Table 1

| X | Terminal Plating |
|---|------------------|
| 0 | Au 1u" Plating |
| 1 | Au 3u" Plating |
| 2 | Au 6u" Plating |
| 3 | Au 15u" Plating |
| 4 | Au 30u" Plating |
| 5 | Au 50u" Plating |

| | | | | | |
|-----|-----------|------|-----------------|--------------------|--------|
| e | LED | 1 | | See Color Scheme | |
| d | LED | 1 | | See Color Scheme | |
| c | Shielding | 1 | Brass | Ni Plating | |
| b | Terminal | 8 | Phosphor Bronze | PLATING & COLOR | |
| a | Housing | 1 | PBT UL94V-0 | See Color Scheme | |
| NO. | PART NAME | Q'TY | MATERIAL | Material & Plating | Remark |

贵州省合曜电子科技有限公司
GuiZhouSheng HeYao Electronic Technology Co.,Ltd

| | | | | | |
|---------------------------------------|--|------------|--------------|-------------|----------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES | | SCALE: 1/1 | UNIT: mm | | DWG. NO: |
| | | SIZE: A3 | PAGE: 1 OF 1 | | REV: A01 |
| DECIMALS: | | ANGLES: | | | |
| X :±0.5 | | X :±2° | | | |
| X.X :±0.3 | | X.X :±1° | | | |
| X.XX :±0.2 | | | | | |
| APPROVED BY | | CHECKED BY | | PREPARED BY | |
| DICK | | WZ | | WZ | |
| CUSTOMER COPY | | | | | |