




CATEGORY	DESCRIPTION	P/N #
CONNECTOR	Modular Jack, 8P8C, R/A, With LED	MJ5688-BX14-RSL1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	GMC	2010.03.07

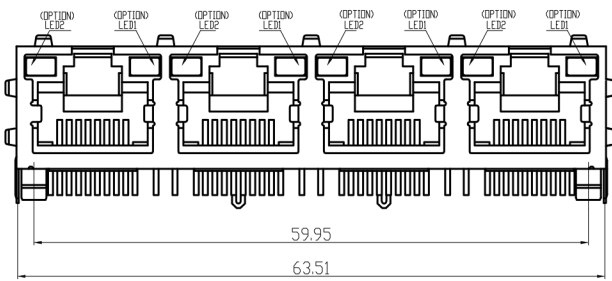

**SPECIFICATIONS:**


1. Voltage: 150V AC RMS
2. Current Rating: 1.5A
3. Contact Resistance: 30mΩ MAX.
4. Insulation Resistance: 500MΩ MIN.
5. Dielectric Withstang Voltage :1000V AC
6. Operature Temperature: -40°C~80°C
7. Durability: 500 Mating Cycles MIN.

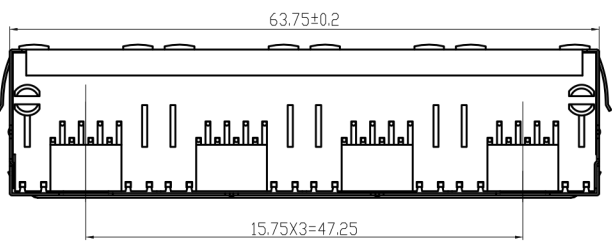

Part No.: MJ5688-BX14-RSL1

Table 1

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating
5	Au 50u" Plating

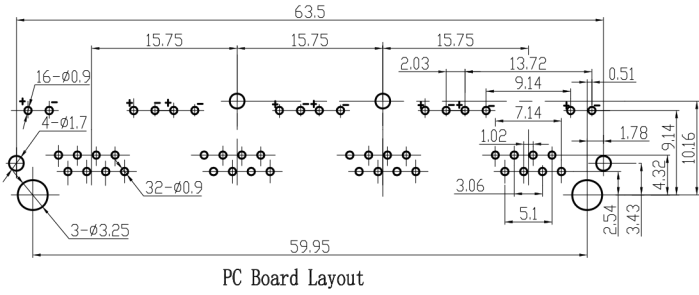

NO.	PART NAME	Q'TY	MATERIAL	Material & Plating	Remark
e	LED	1		See Color Scheme	
d	LED	1		See Color Scheme	
c	Shielding	1	Brass	Ni Plating	
b	Terminal	8	Phosphor Bronze	PLATING & COLOR	
a	Housing	1	PBT UL94V-0	See Color Scheme	

**贵州省合曜电子科技有限公司**  
GuiZhouSheng HeYao Electronic Technology Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE: 1/1	UNIT: mm		DWG.NO:	
		SIZE: A3	PAGE: 1 OF 1		REV: A01	WI-061-751
DECIMALS:		ANGLES:		APPROVED BY	CHECKED BY	PREPARED BY
X : ±0.5		X : ±2°		DICK	WZ	WZ
X.X : ±0.3		X.X : ±1°		<b>CUSTOMER COPY</b>		
X.XX : ±0.2						