
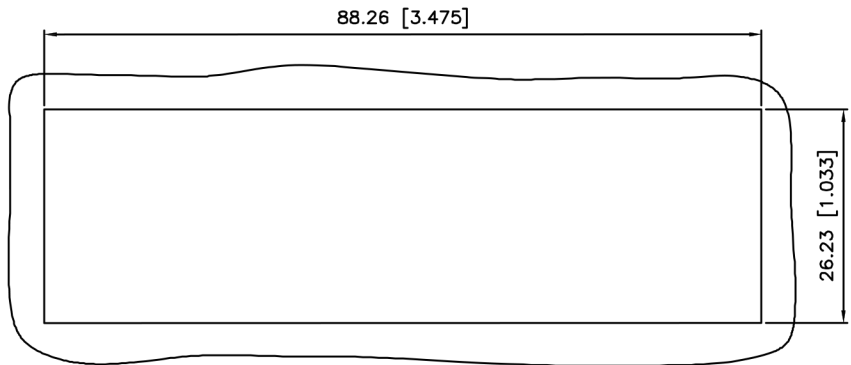





CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 2X6 1000Mbps	MJ009-B226-RSL31T15

REV.	ECN NO	DESCRIPTION	REVISED	DATE
R01	—	New Release	Kelly	2009.3.22

1. MECHANICAL DIMENSIONS :

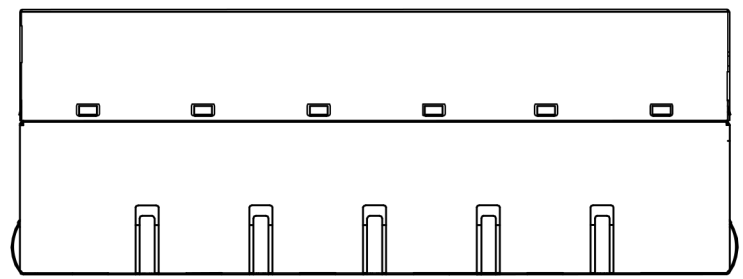


RECOMMENDED
PANEL CUTOUT DIMENSION

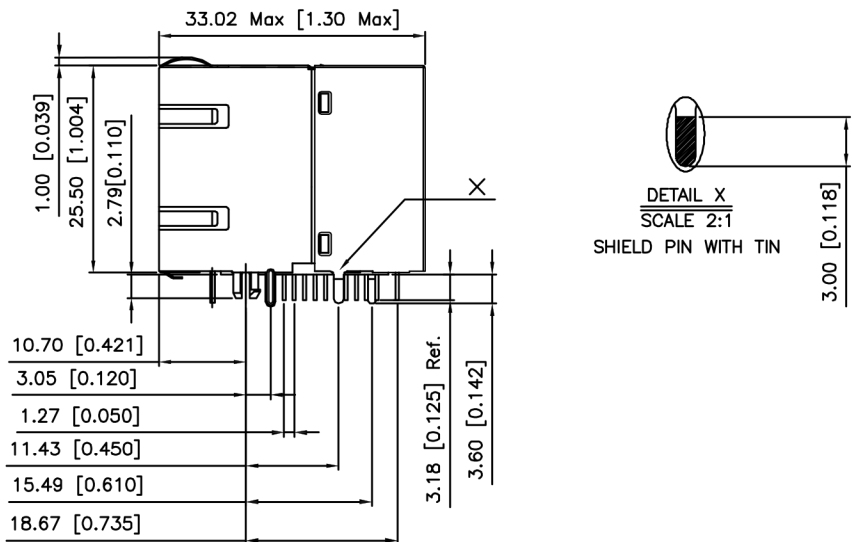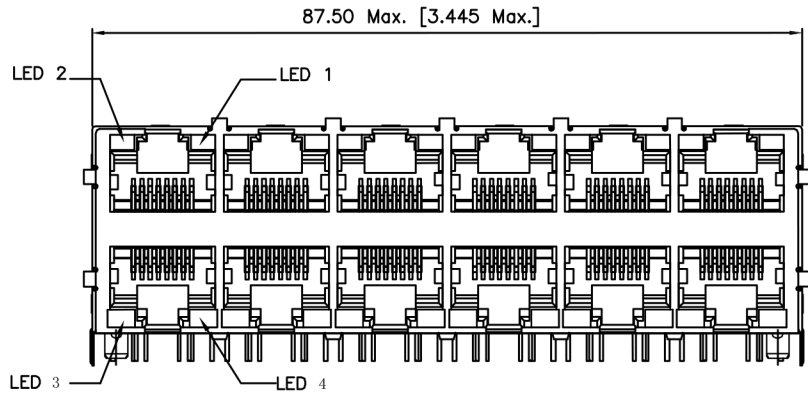

NOTES:

- MATERIAL:
 - HOUSING—PBT POLYESTER UL-94V-0
 - MIXED GLASS FIBER.
 - STANDARD COLOR—BLACK
 - CONTACTS—0.30mm THICK PHOS—BRONZE PLATED WITH 30u" GOLD AND TIN IN SOLDER AREA, AND 50u" NICKEL PLATING IN ALL AREA.
 - SHIELD— SUS301 T=0.20 mm WITH TIN ON TERMINATION END.
- OPERATING TEMPERATURE: 0°C~+70°C
- CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

 **贵州省合曜电子科技有限公司**
GuiZhouSheng HeYao Electronic Technology Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE:1/1	UNIT: mm		DWG.NO:
	SIZE: A3	PAGE:1 OF 3	REV:A	HL-TR-001
UNIT: mm .XX :±0.25 .XXX :±0.13	APPROVED BY	CHECKED BY	PREPARED BY	
	Tony	Bill	Kelly	
CUSTOMER COPY				