



| CATEGORY | DESCRIPTION | P/N # |
|-----------|-------------------|---------------------|
| CONNECTOR | RJ45 2X6 1000Mbps | MJ009-B226-RSL31T15 |

| REV. | ECN NO | DESCRIPTION | REVISED | DATE |
|------|--------|-------------|---------|-----------|
| R01 | — | New Release | Kelly | 2009.3.22 |


2. PCB LAYOUT :

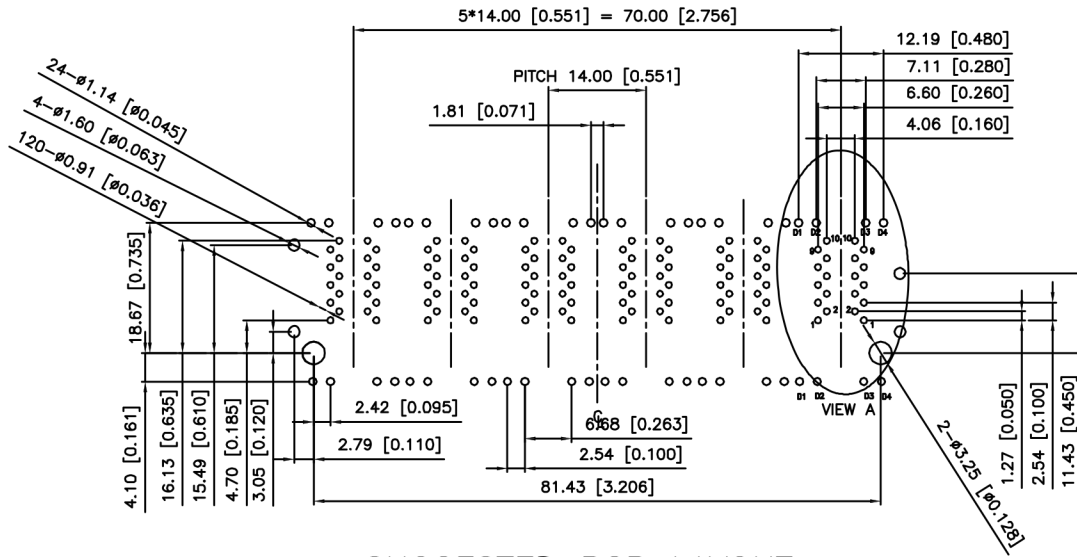

SUGGESTED PCB LAYOUT
TOP VIEW
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

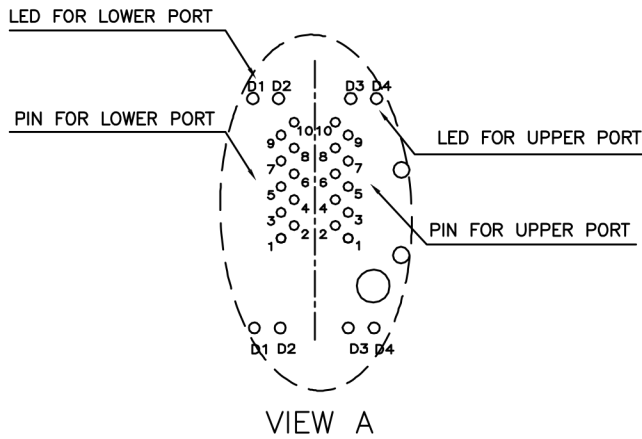

3. LED CONFIGURATION :

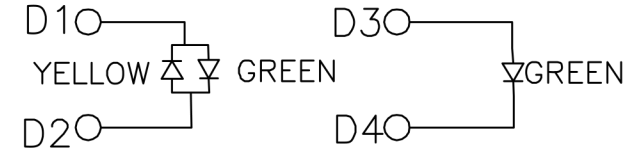

| Color | Lens Color | Vf(v) @20mA | | Iv(mcd) @10mA | | Viewing angle 2θ 1/2 |
|-------|----------------|----------------|-----|------------------|-----|-------------------------|
| | | Min | Max | Min | Typ | |
| Green | Green Diffused | 1.7 | 2.8 | 3.5 | 6.0 | 116 |

贵州省合曜电子科技有限公司
GuiZhousheng HeYao Electronic Technology Co.,Ltd

| | | | | |
|---------------------------------------|-------------|-------------|-------------|---------|
| UNLESS OTHERWISE SPECIFIED TOLERANCES | SCALE:1/1 | UNIT: mm | | DWG.NO: |
| | SIZE: A3 | PAGE:2 OF 3 | | REV:A |
| UNIT: mm .XX :±0.25 .XXX :±0.13 | APPROVED BY | CHECKED BY | PREPARED BY | |
| | Tony | Bill | Kelly | |
| CUSTOMER COPY | | | | |