
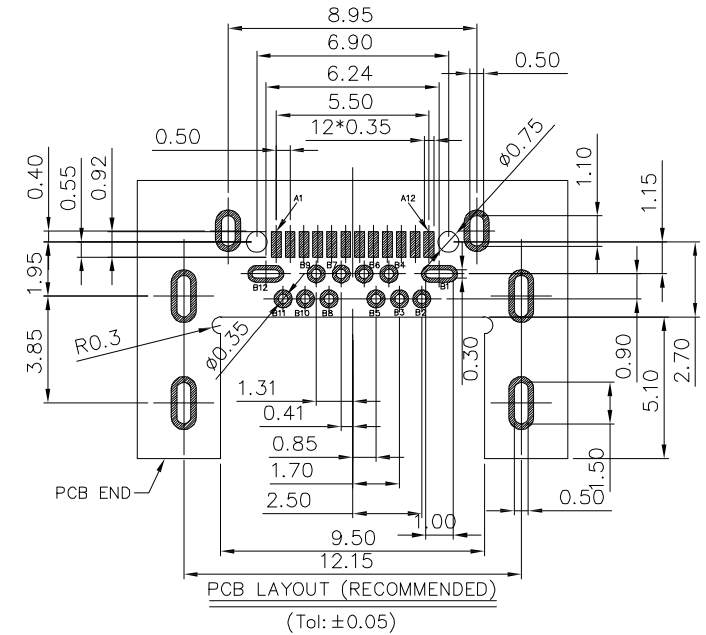
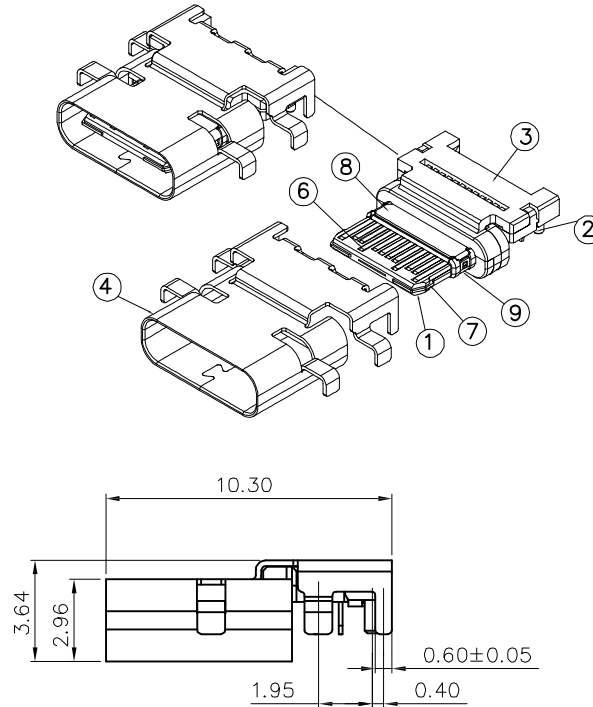



所有原料材质，生产制程，电镀必须符合RoHS要求

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			RELEASE TO CUSTOMER	150116	YINC

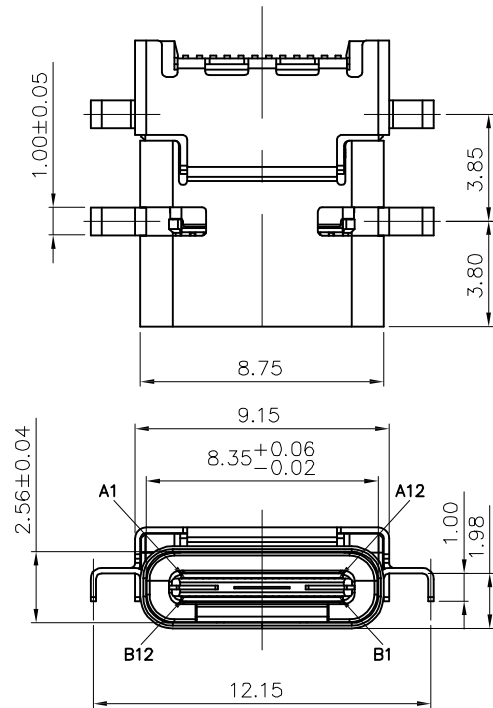

SPECIFICATION
MATERIAL
 See drawing
STANDARD DATA
 Rating current: 1.5A
ELECTRICAL
 Insulator resistance: 100M ohms Min
 Withstanding voltage: 100 VAC / minute
 Contact resistance: 40 m ohms Max
MECHANICAL
 Mating force: 5~20N.
 Unmating force: 8~20N.
 Durability: 10000 cycles Min.

Signal Name	Signal Name
A1	GND
A2	SSTXp1
A3	SSTXn1
A4	VBUS
A5	CC1
A6	Dp1
A7	Dn1
A8	SBU1
A9	VBUS
A10	SSRXn2
A11	SSRXp2
A12	GND
B12	GND
B11	SSRXp1
B10	SSRXn1
B9	VBUS
B8	SBU2
B7	Dn2
B6	Dp2
B5	CC2
B4	VBUS
B3	SSTXn2
B2	SSTXp2
B1	GND

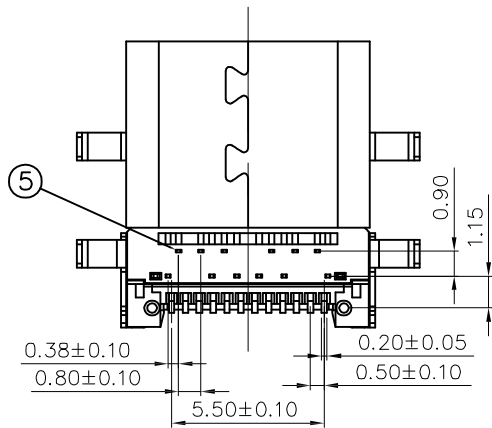

ITEM	PARTS NAME	Q'TY	MATERIAL	FINISH/REMARK
1	Insemold housing	1	SYNTHETIC RESIN	Black
2	12pin Insemold-(1)	1	SYNTHETIC RESIN	Black
3	12pin Insemold-(2)	1	SYNTHETIC RESIN	Black
4	SHELL	1	STAINLESS	Ni:50u" Min
5	12pin Contact-(DIP)	12	COPPER ALLOY	Gold flash on contact area 100u" Tin on solder tails, base Nickel:50u"
6	12pin Contact-(SMT)	12	COPPER ALLOY	Gold flash on contact area 100u" Tin on solder tails, base Nickel:50u"
7	Shield SHELL	1	STAINLESS	base Nickel:50u" Mini Tin:80u" Min Over All
8		1	STAINLESS	Ni:50u" Min
9	Ground_plate-bottom	1	STAINLESS	Ni:50u" Min

DRAW NO.		DATE	
DESIGN	YINC	150116	
CHECK	ZHAOZZ	150116	
APPROVED	HUXW	150116	



深圳朗思达 香港朗思达
 东莞共营 前海共赢

connector & cable

DRAW NAME:		USB 3.1 TYPE C 母座 沉板DIP+SMT 四脚插板	
P/N NO.	21000044	SHORT CODE	
UNIT: mm	SHEET: N/A	MODEL	
		REV. A	SCALE N/A

DIM	TOL	DIM	TOL
X.	±0.30	X".	±4.0"
X.X	±0.25	X.X"	±3.0"
X.XX	±0.20	X.XX"	±2.0"
X.XXX	±0.10	X.XXX"	±1.0"

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION