












1

2

3

4

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			RELEASE TO CUSTOMER	180116	JIANG



NOTE:
 备注:
 1.MATERIAL SPECIFICATION:
 1.材料规格:
 1-1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.
 1-1.胶芯材料:高温塑胶,防火等级UL94 V-0
 1-2.TERMINAL: COPPER ALLOY
 1-2.端子材料:铜合金
 1-3.FRONT SHELL: STAINLESS STEEL
 1-3.外壳材料:不锈钢
 1-4.MID PLATE: STAINLESS STEEL
 1-4.中夹片:不锈钢
 2.PLATING SPECIFICATION:
 2.电镀规格:
 2-1.TERMINAL:
 2-1.端子:
 Ni 50u" MIN. UNDER PLATED OVER ALL.
 镀镍底 50u" MIN.
 Au PLATED 0.5~1u" OVER Ni
 表面刷金 0.5~1u"
 2-2.FRONT SHELL:
 2-2.外壳:
 Ni 50u" MIN. PLATED OVER ALL.
 镀镍底 50u" MIN.
 3.MECHANICAL PERFORMANCE,
 3.机械性能,
 3-1.INSERTION FORCE: 0.5~2.0kgf.
 3-1.插入力: 0.5~2.0kgf.
 3-2.REMOVAL FORCE: 0.6kgf~2.0kgf.
 3-2.拔出力: 0.6kgf~2.0kgf.
 3-3.DURABILITY: 10000 CYCLES.
 3-3.插拔寿命: 10000次
 4.ELECTRICAL PERFORMANCE,
 4.电气性能,
 4-1. VOLTAGE RATING: 5.0V DC/AC
 4-1. 额定电压: 5.0V DC/AC
 CURRENT RATING: 2.0A
 额定电流: 2.0A
 4-2. LLCR: 50mΩ/PIN MAX.
 4-2. 接触阻抗: 50mΩ/PIN MAX.
 4-3.INSULATION RESISTANCE: 100MΩ MIN
 4-3. 绝缘阻抗: 100MΩ MIN
 4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
 4-4. 耐电压: AC 100V FOR 1 MINUTE.
 5. ENVIRONMENTAL PERFORMANCE:
 5. 环境特性:
 OPERATING TEMPERATURE: -25°C~+85°C.
 工作温度: -25°C~+85°C.

RECOMMENDED P.C.B. LAYOUT
 TOLERANCE UNSPECIFIED ±0.05mm

LASTAR

Lastar Technology CO., LTD

DIM	TOL	DIM	TOL
X.	±0.30	X'	±4.0"
X.X	±0.25	X.X'	±3.0"
X.XX	±0.20	X.XX'	±2.0"
X.XXX	±0.10	X.XXX'	±1.0"

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DRAW NO.		DATE	DRAW NAME:	
DESIGN		JIANG	TYPE C 6PIN 母座 立贴 6.5H	
CHECK			P/N NO.	FILE:
APPROVED		HUYX	21000160	MODEL:
		180116	UNIT: mm	REV. A
			SHEET: N/A	SCALE N/A

1

2

3

4


1

2









3

4

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			RELEASE TO CUSTOMER	180116	JIANG

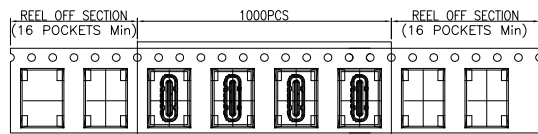

SEE DETAIL X

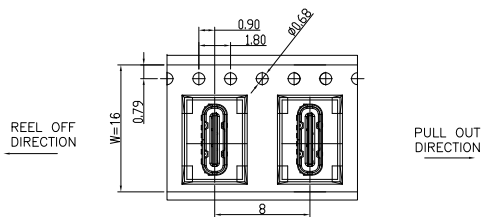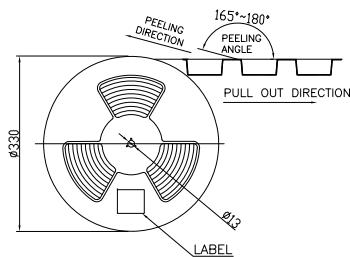

LASTAR

Lastar Technology CO., LTD

DRAW NO.		DATE	DRAW NAME:	
DESIGN	JIANG	180116	TYPE C 6PIN 母座 立贴 6.5H	
CHECK			P/N NO. 21000160	FILE:
APPROVED	HUYX	180116	UNIT: mm SHEET: N/A	MODEL: REV. A SCALE N/A

DIM	TOL	DIM	TOL
X.	±0.30	X'	±4.0'
X.X	±0.25	X.X'	±3.0'
X.XX	±0.20	X.XX'	±2.0'
X.XXX	±0.10	X.XXX'	±1.0'

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

1

2

3

4