
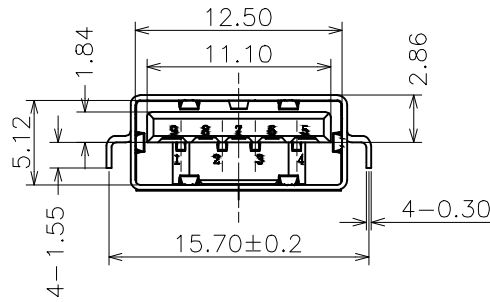
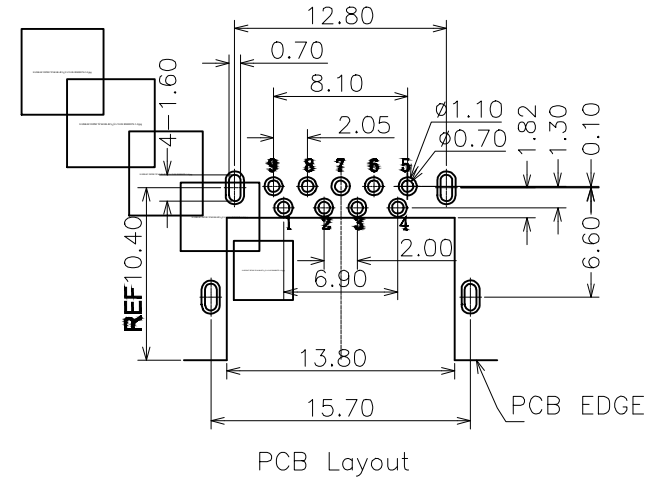
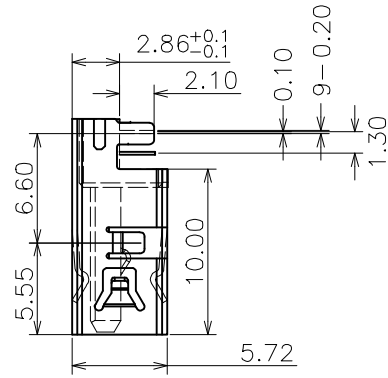




All raw material,production process,electroplating must meet the requirements of EU RoHS.

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER		HANG
B					HANG

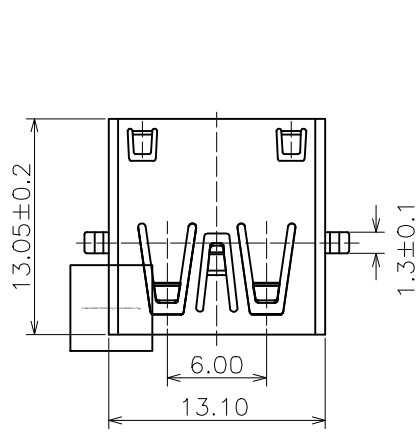

PIN	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	CND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

- 1.MATERIAL:
 - 1.1 INSULATOR:LCP UL 94V-0
 - 1.2 CONTACT:BRONZE(T=0.20mm)
 - 1.3 SHELL:SUS201(T=0.30mm)
- 2.ELECTRICAL CHARACTERISTICS;
 - 2.1 CONTACTRESISTANCE:30mΩ MAXIMUM
 - 2.2 CONTACT CURRENT RATING:1.5A
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.
 - 2.4 INSULATION RESISTANCE 1000 MEGOHMS MIN
 - 2.5 OPERATING TEMPERATURE:-40°C ~ 85°C
- 3 MECHANICAL CHARACTERISTICS:
 - 3.1 MATING FORCE:3.57kg MAX
 - 3.2 UNMATED FORCE:1.02kg MIN
 - 3.3 DURABILITY:MANDATORY:5,000 CYCLES
- 4.PLATING
 - 4.1 TERMINAL:
 - 50u" MIN NICKEL ALL OVER
 - 100u"MIN Tin ON SOLDER AREA
 - (1~30)u"Au ON CONTACT AREA
 - 4.2 SHELL:100u"MIN.NICEL ALL OVER

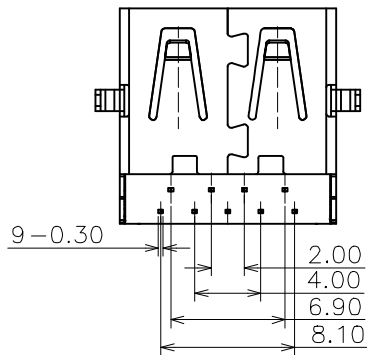

DIM	TOL	DIM	TOL
X.	±0.30	X'	±4.0'
X.X	±0.25	X.X'	±3.0'
X.XX	±0.20	X.XX'	±2.0'
X.XXX	±0.10	X.XXX'	±1.0'

深圳朗思达科技有限公司

DRAW NO.		DATE		DRAW NAME:	
				USB AF DIP90 沉板2.86 平口 L13.05	
DESIGN	HANG	20200218	P/N NO.		20900075
CHECK	ZHAOZZ	20200218	CIB CODE:		
APPROVED	RYAN	20200218	UNIT:	SHEET:	MODEL:
		mm	N/A	REV. B	SCALE N/A