


所有原料材质，生产制程，电镀必须符合RoHS要求

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			RELEASE TO CUSTOMER	150116	YINC

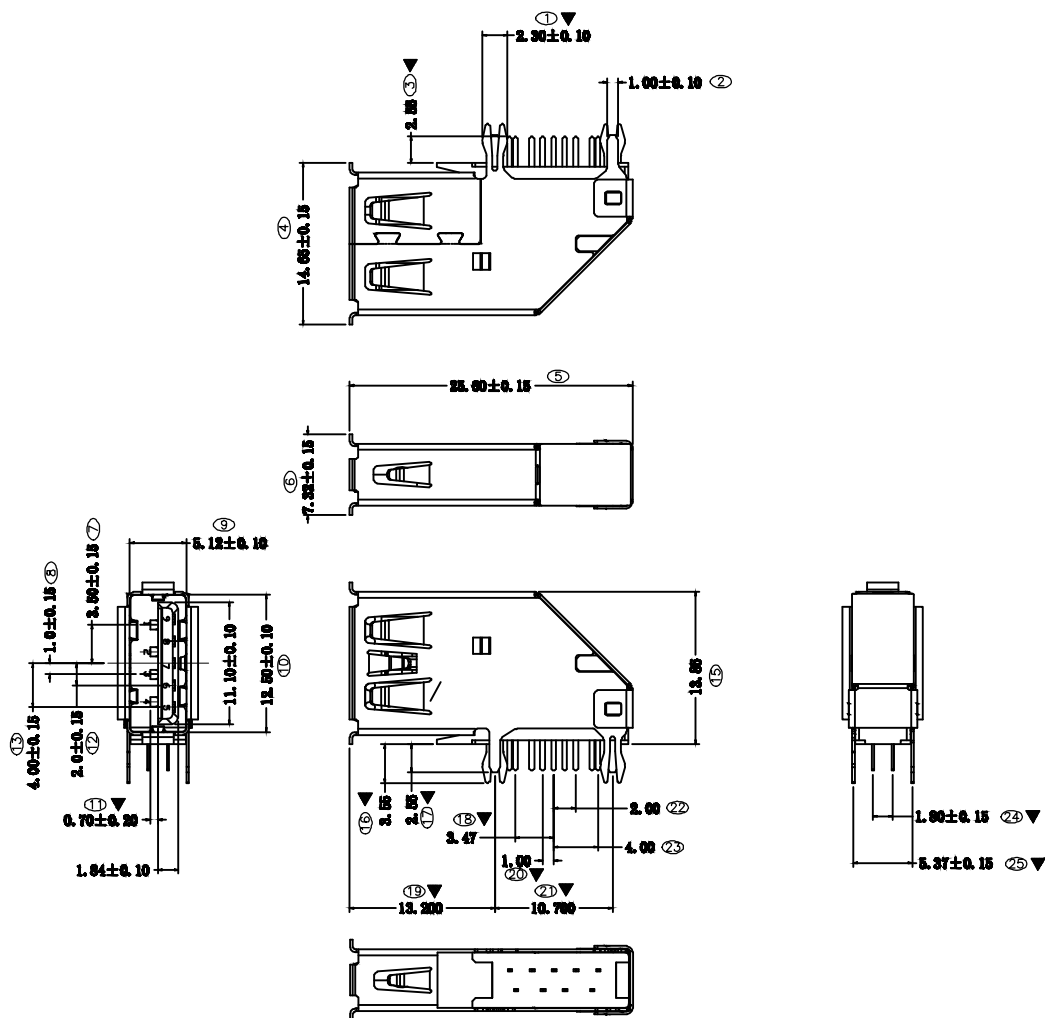

NOTES:

1. MATERIAL:


- 1.1 HOUSING: LCP E1304 黄色 /PBT.
- 1.2 SPRING CONTACT: C5210R-EH T=0.20t
- 1.3 FLAT CONTACT: C5210R-EH T=0.20t
- 1.4 SHELL :SUS201. T=0.25t

2. FINISH:

- 2.1 CONTACT: GOLD PLATING ON CONTACT AREA, MATTE TIN PLATING ON SOLDER TAIL AREA, NICKEL UNDER PLATING.
- 2.2 SHELL: SOLDERABILITY NICKEL PLATING OVER ALL.

3. ▽ SHOWS QIP INSPECTION ITEM

4. ⊗ SHOWS FAI MEASUREMENT POINT.

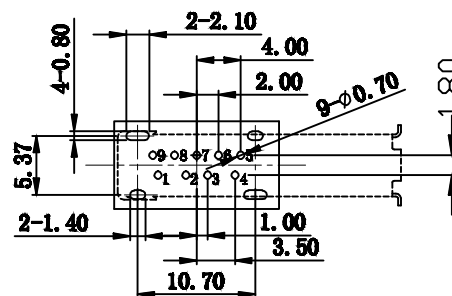

Recommended P.C.B Layout
General Tolerance±0.05
TOP VIEW

DIM	TOL	DIM	TOL
X.	±0.30	X'.	±4.0"
X.X	±0.25	X.X'	±3.0"
X.XX	±0.20	X.XX'	±2.0"
X.XXX	±0.10	X.XXX'	±1.0"

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DRAW NO.		DATE	
DESIGN	YINC	150116	
CHECK	ZHAOZZ	150116	
APPROVED	HUXW	150116	



- 深圳朗思达 香港朗思达
- 东莞共营 前海共赢

connector & cable

DRAW NAME:		USB 3.0 AF DIP 侧插	
P/N NO.	20900063	SHORT CODE	
UNIT:	mm	MODEL	
SHEET:	N/A	REV. A	SCALE N/A