
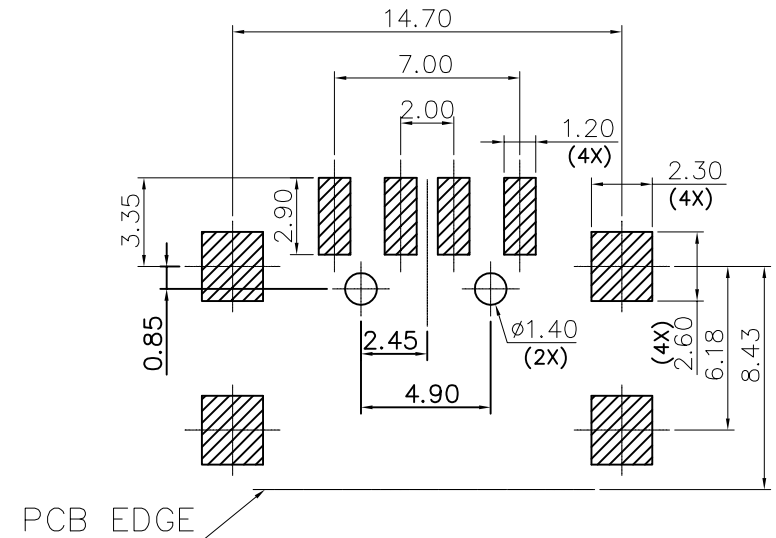
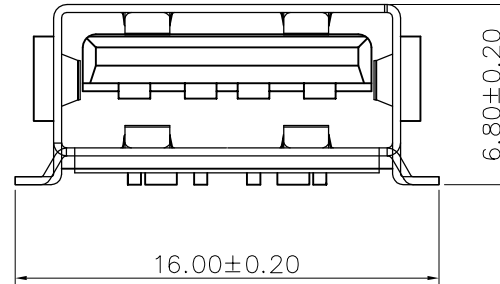



**\*所有原料材质，生产制程，电镀必须符合RoHS要求\***

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER	150116	RYAN

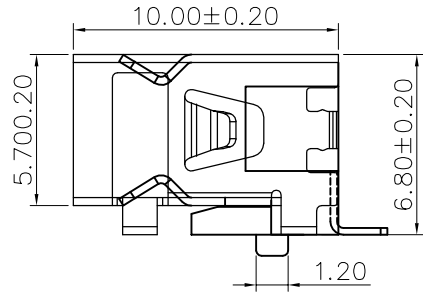

PCB EDGE

RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05

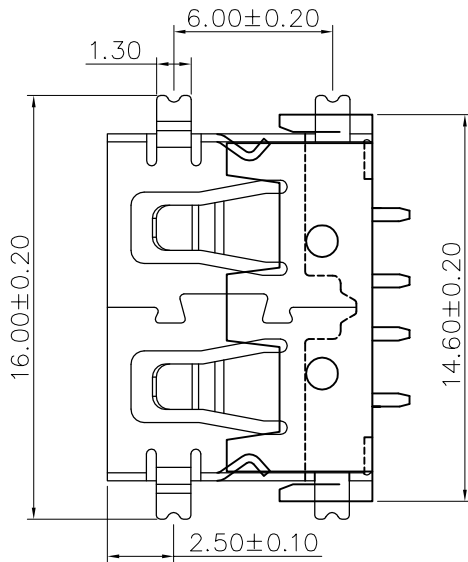

NOTE:

1. ELECTRICAL:

VOLRAGE RATING:30VAC RMS;  
CURRENT RATING:1 AMP MIN;  
CONTACT RESISTANCE:30mΩ MAX;  
DIELECTRIC WITHSTANDING VOLTAGE:500V AC  
FOR ONE MINUTE AT SEA LEVEL;

2. MECHANICAL:

CONTACT RETENTION FORCE:4N MIN  
MATING FORCE:35N MAX  
UNMATING FORCE:10N MIN

3. ENVIRONMENTAL:

OPERATING TEMPERATURE:-40°C TO 85°C

4. SALT SPRAY:24H AT 35%DC WITH  
5%-SALT-SOLUTION CONCENTRATION.

5. MATERIAL:

HOUSING:HIGH TEMP:LCP BLACK  
CONTACT:COPPER ALLOY T=0.20  
SHELL:STAINLESS STEEL T=0.30

6. PLATING:

CONTACT: GOLD PLATING ON CONTACT AREA  
SEE TABLE PLATING SN

DIM	TOL	DIM	TOL
X.	±0.30	X'.	±4.0'
X.X	±0.25	X.X'	±3.0'
X.XX	±0.20	X.XX'	±2.0'
X.XXX	±0.10	X.XXX'	±1.0'

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

**LASTAR**

Lastar Technology CO.,LTD

TEL:0755-27157971 FAX:0755-27157976 Http://www.lsdconn.com

DRAW NO.	112-8BB-04X7	DATE	DRAW NAME: USB A母 短体10.0 全贴 6.8H 平口		
DESIGN	RYAN	150116	P/N NO.	USB-112-8BB-04X7	HS CODE
CHECK	WANGCM	150116	UNIT:	SHEET:	MODEL
APPROVED	HUYX	150116	mm	N/A	X7
			REV. A0	SCALE	N/A