

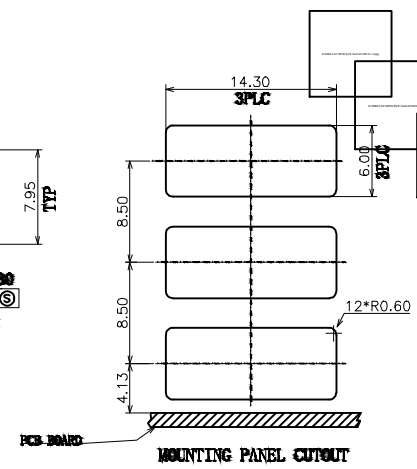
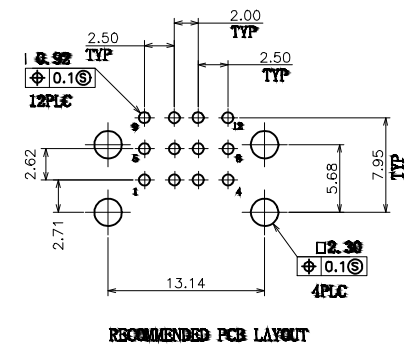
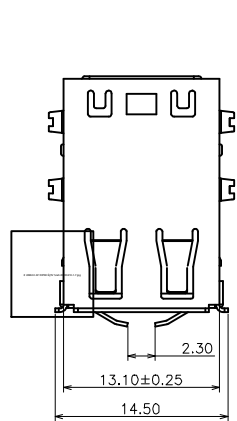
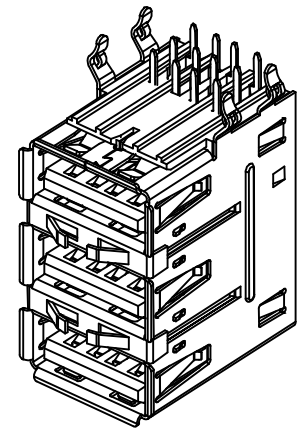
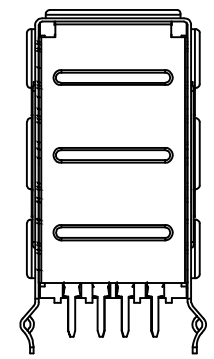


All raw material,production process,electroplating must meet the requirements of EU RoHS.

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER		HANG
B					HANG

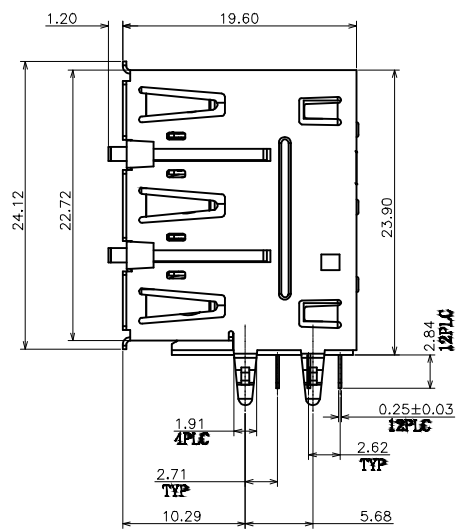

- MATERIAL:
 - HOUSING:PA6T+30% G/F,COLOR:BLACK, UL94V-0;
 - CONTACTS: PHOSPHOR BRONZE
 - SHELL :PHOSPHOR BRONZE OR SK7
 - ISOLATED:PHOSPHOR BRONZE OR SK7
 - REAR SHELL :SPCC
- FINISH:
 - CONTACT: GOLD(SEE TABLE) PLATING ON CONTACT AREA. 100u" MIN. BRIGHT-TIN PLATING ON SOLDER TAIL AREA,50u" MIN. NICKEL UNDERPLATING OVERALL,
 - SHELL: 100u" MIN. BRIGHT-TIN PLATING ON SOLDER TAILS. 50u" MIN. NICKEL UNDERPLATING OVERALL OR 100u" MIN. NICKEL PLATED .
 - ISOLATED:SHELL: 100u" MIN. NICKEL PLATED
 - REAR SHELL:100u" MIN. NICKEL PLATED.
- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 0.5Amper Maximum
 - VOLTAGE: 30V AC.
 - CONTACT RETENTION FORCE:0.7KGFMINIMUM.
 - CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM.
 - INSULATION RESISTANCE: 1000MEGHOHMS MINIMUM.
 - DIELECTRIC WITHSTANDING VOLTAGE: 750V AC AT SEE LEVEL.
 - TEMPERATURE: -55°C~85°C .

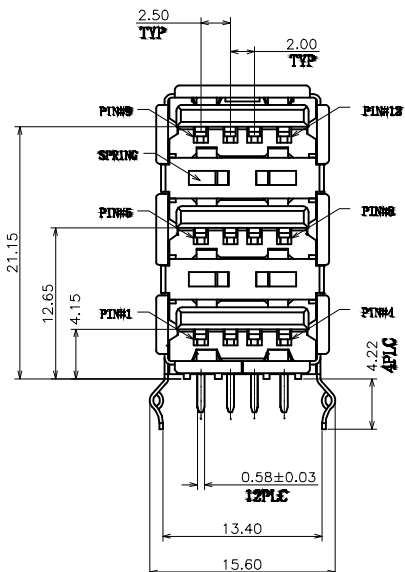

深圳朗思达科技有限公司

DRAW NO.		DATE	DRAW NAME: USB2.0 AF DIP90 三层 卷边	
DESIGN	HANG	20200218	P/N NO. 20100410	CIB CODE:
CHECK	ZHAOZZ	20200218	UNIT: mm	MODEL:
APPROVED	RYAN	20200218	SHEET: N/A	REV. B SCALE N/A

DIM	TOL	DIM	TOL
X.	±0.30	X'	±4.0'
X,X	±0.25	X,X'	±3.0'
X,XX	±0.20	X,XX'	±2.0'
X,XXX	±0.10	X,XXX'	±1.0'

THIS DRAWING CONTAINS INFORMATION THAT IS PROTECTED BY PATENT OR OTHER INTELLECTUAL PROPERTY RIGHTS. IT IS THE PROPERTY OF LANGSITAI TECHNOLOGY CO., LTD. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.