







所有原料材质，生产制程，电镀必须符合RoHS要求

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
AO			RELEASE TO CUSTOMER	170116	RYAN

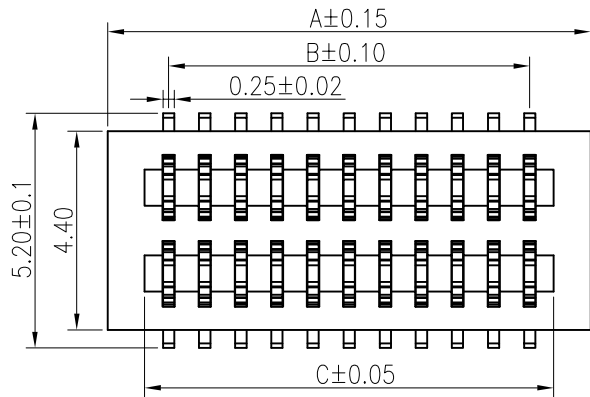


3D VIEW

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	NO. of contacts	Dimensions				NO. of contacts	Dimensions			
				A	B	C	D		A	B	C	D
4.0	1.0	3.0	4	3.50	0.80	1.86	2.60	54	23.50	20.80	21.86	22.60
4.5	1.0	3.5	6	4.30	1.60	2.66	3.40	56	24.30	21.60	22.66	23.40
5.0	1.0	4.0	8	5.10	2.40	3.46	4.20	58	25.10	22.40	23.46	24.20
5.5	1.0	4.5	10	5.90	3.20	4.26	5.00	60	25.90	23.20	24.26	25.00
6.0	2.0	4.0	12	6.70	4.00	5.06	5.80	62	26.70	24.00	25.06	25.80
6.5	2.0	4.5	14	7.50	4.80	5.86	6.60	64	27.50	24.80	25.86	26.60
7.0	4.0	3.0	16	8.30	5.60	6.66	7.40	66	28.30	25.60	26.66	27.40
7.5	4.0	3.5	18	9.10	6.40	7.46	8.20	68	29.10	26.40	27.46	28.20
8.0	4.0	4.0	20	9.90	7.20	8.26	9.00	70	29.90	27.20	28.26	29.00
8.5	4.0	4.5	22	10.70	8.00	9.06	9.80	72	30.70	28.00	29.06	29.80
24	11.50	8.80	9.86	10.60	74	31.50	28.80	29.86	30.60			
26	12.30	9.60	10.66	11.40	76	32.30	29.60	30.66	31.40			
28	13.10	10.40	11.46	12.20	78	33.10	30.40	31.46	32.20			
30	13.90	11.20	12.26	13.00	80	33.90	31.20	32.26	33.00			
32	14.70	12.00	13.06	13.80	82	34.70	32.00	33.06	33.80			
34	15.50	12.80	13.86	14.60	84	35.50	32.80	33.86	34.60			
36	16.30	13.60	14.66	15.40	86	36.30	33.60	34.66	35.40			
38	17.10	14.40	15.46	16.20	88	37.10	34.40	35.46	36.20			
40	17.90	15.20	16.26	17.00	90	37.90	35.20	36.26	37.00			
42	18.70	16.00	17.06	17.80	92	38.70	36.00	37.06	37.80			
44	19.50	16.80	17.86	18.60	94	39.50	36.80	37.86	38.60			
46	20.30	17.60	18.66	19.40	96	40.30	37.60	38.66	39.40			
48	21.10	18.40	19.46	20.20	98	41.10	38.40	39.46	40.20			
50	21.90	19.20	20.26	21.00	100	41.90	39.20	40.26	41.00			

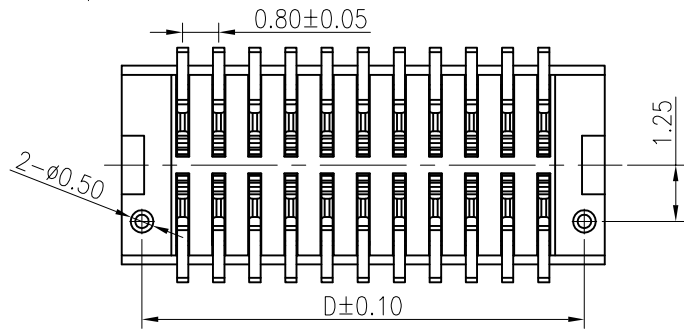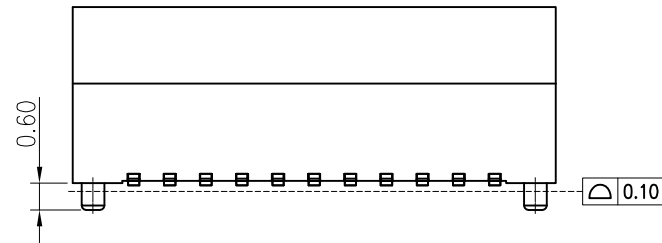

MATING HEIGHT
SCALE: 1.25:1

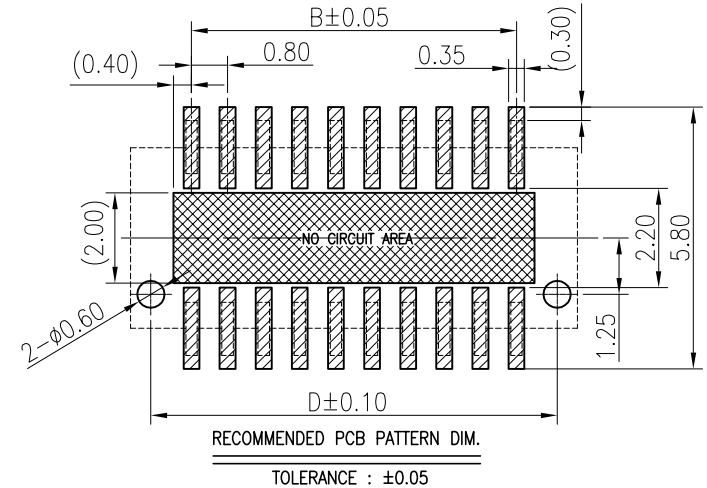

NOTES:

- HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- TERMINAL:PHOSPHOR BRONZE
PLATING:1*”GOLD FLASH OVERALL 50~100*”NICKEL UNDER PLATED.
- CODING INFORMATION: BTB-082-XX2-XXB4-11

PIN
0.5 BTB
MATING HEIGHT: 30--3.0H;35--3.5H;
40--4.0H;45--4.5H;
50--5.0H;55--5.5H;
60--6.0H;65--6.5H;
70--7.0H;75--7.5H;
80--8.0H;85--8.5H;

DIM	TOL	DIM	TOL
X.	±0.30	X'.	±4.0°
X.X	±0.25	X.X'	±3.0°
X.XX	±0.20	X.XX'	±2.0°
X.XXX	±0.10	X.XXX'	±1.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

LASTAR

Lastar Technology CO., LTD

TEL:0755-27157971 FAX:0755-27157976 Http://www.lsdconn.com

DRAW NO.	DATE	DRAW NAME: BTB PITCH0.8MM SOCKET 双槽	
DESIGN	RYAN	170116	P/N NO. BTB-082-XX2-XXB4-11
CHECK	WANGCM	170116	SHORT CODE
APPROVED	HUYX	170116	MODEL B4
UNIT: mm		SHEET: N/A	
		REV. AO SCALE N/A	