

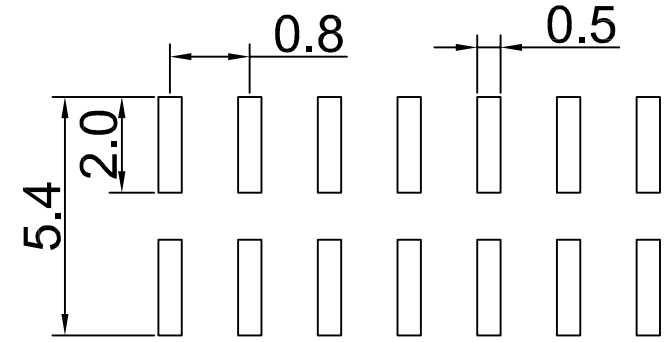
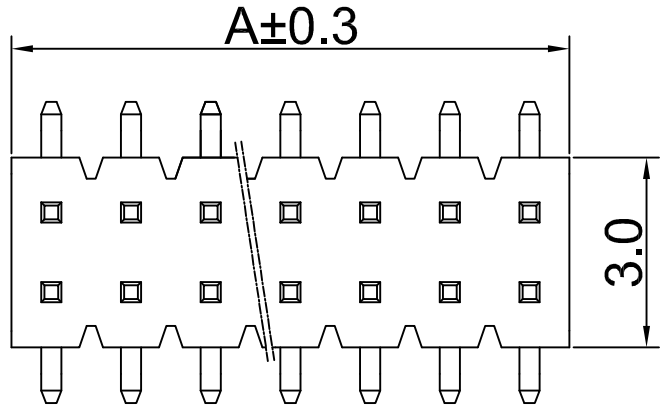


所有原料材质，生产制程，电镀必须符合RoHS要求

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			RELEASE TO CUSTOMER	150116	YINC

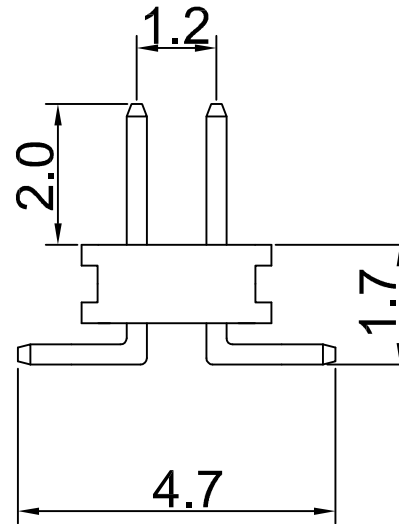

P.C.B. LAYOUT

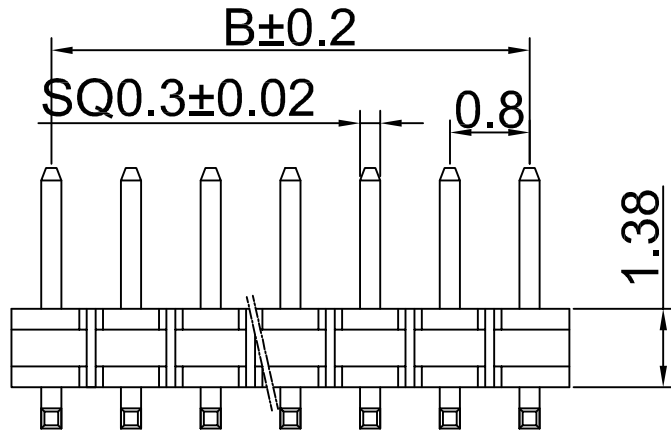

SPECIFICATIONS:

Current Rating: 1Amp
 Insulator Resistance: 1000Megohms min
 Dielectric withstanding: AC 500V
 Operating Temperature: -40°~+85°
 Contact Material: Brass
 Insulator Material: PA6T UL94V-0
 Plating: Gold 1U"

Contacts Per Row	Dimensions		Contacts Per Row	Dimensions	
	A	B		A	B
2*1pin			2*26pin	20.80	20.0
2*2pin	1.6	0.8	2*27pin	21.6	20.8
2*3pin	2.4	1.6	2*28pin	22.4	21.6
2*4pin	3.2	2.4	2*29pin	23.2	22.4
2*5pin	4.0	3.2	2*30pin	24.0	23.2
2*6pin	4.8	4.0	2*31pin	24.8	24.0
2*7pin	5.6	4.8	2*32pin	25.6	24.8
2*8pin	6.4	5.6	2*33pin	26.4	25.6
2*9pin	7.2	6.4	2*34pin	27.2	26.4
2*10pin	8.0	7.2	2*35pin	28.0	27.2
2*11pin	8.8	8.0	2*36pin	28.8	28.0
2*12pin	9.6	8.8	2*37pin	29.6	28.8
2*13pin	10.4	9.6	2*38pin	30.4	29.6
2*14pin	11.2	10.4	2*39pin	31.2	30.4
2*15pin	12.0	11.2	2*40pin	32.0	31.2
2*16pin	12.8	12.0	2*41pin	32.8	32.0
2*17pin	13.6	12.8	2*42pin	33.6	32.8
2*18pin	14.4	13.6	2*43pin	34.4	33.6
2*19pin	15.2	14.4	2*44pin	35.2	34.4
2*20pin	16.0	15.2	2*45pin	36.0	35.2
2*21pin	16.8	16.0	2*46pin	36.8	36.0
2*22pin	17.6	16.8	2*47pin	37.6	36.8
2*23pin	18.4	17.6	2*48pin	38.4	37.6
2*24pin	19.2	18.4	2*49pin	39.2	38.4
2*25pin	20.0	19.2	2*50pin	40.0	39.2

DRAW NO.	42XX-1AM8-37	DATE	
DESIGN	YINC	150116	
CHECK	ZHAOZZ	150116	
APPROVED	HUXW	150116	



深圳朗思达
 香港朗思达
东莞共营
 前海共赢

connector & cable

DRAW NAME:		排针0.8 2xNPIN SMT H1.38 PA2.0 无柱	
P/N NO.	PH-42XX-1AM8-37	SHORT CODE	40300173
UNIT:	mm	MODEL	37
SHEET:	N/A	REV. A	SCALE N/A

DIM	TOL	DIM	TOL
X.	±0.30	X*.	±4.0°
X.X	±0.25	X.X*	±3.0°
X.XX	±0.20	X.XX*	±2.0°
X.XXX	±0.10	X.XXX*	±1.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION