


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER	140116	HANG

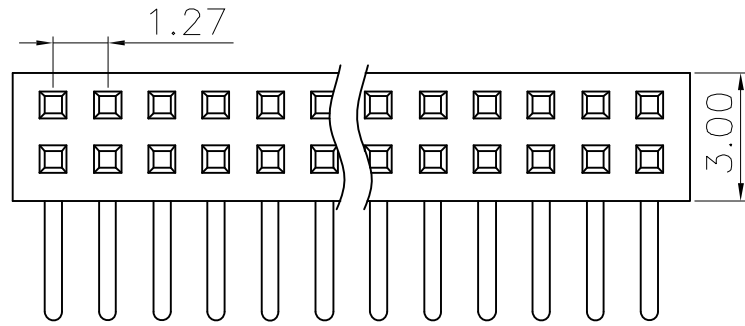

### Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC/DC

Contact Resistance: 20mΩ Max.



Operating Temperature: -40°C to +105°C

### Materials


Contact Material: Brass

Insulation Material: Polyester, UL 94V-0 Nylon 6T

All materials must be GP materials

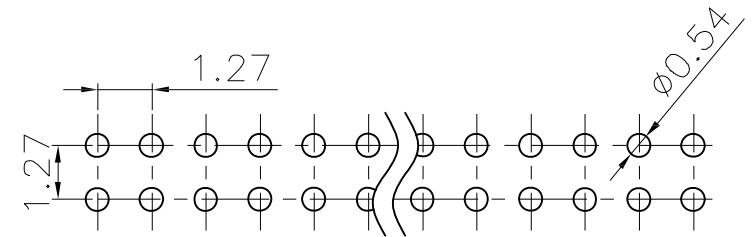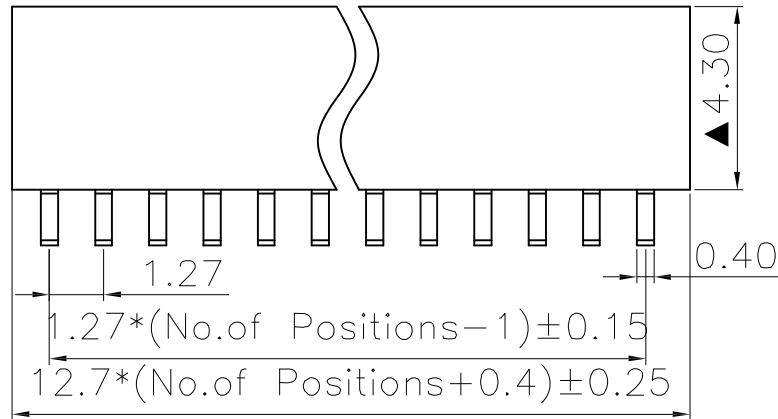

RECOMMENDED PCB LAYOUT  
TOLLERANCE: ±0.05

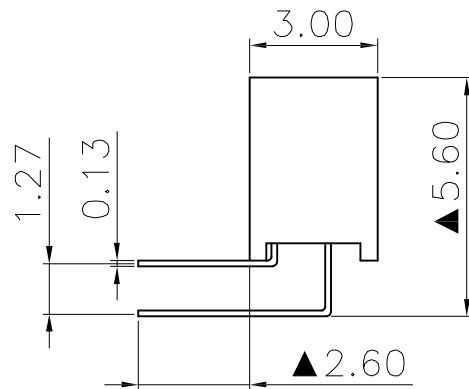

DIM	TOL	DIM	TOL
X.	±0.30	X".	±4.0"
X.X	±0.25	X.X"	±3.0"
X.XX	±0.20	X.XX"	±2.0"
X.XXX	±0.10	X.XXX"	±1.0"

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

<b>LASTAR</b>		Lastar Technology CO., LTD	
		TEL:0755-27157971 FAX:0755-27157976 Http://www.lsdconn.com	
DRAW NO.	12XX-1C30-95	DATE	
DESIGN	HANG	140116	
CHECK	WANGCM	140116	
APPROVED	HUYX	140116	
DRAW NAME:		Female Header Pitch1.27mm 双排DTP90°	
P/N NO.		FH-12XX-1C30-95	
UNIT:		mm	
SHEET:		N/A	
MODEL:		REV. A0 SCALE N/A	