

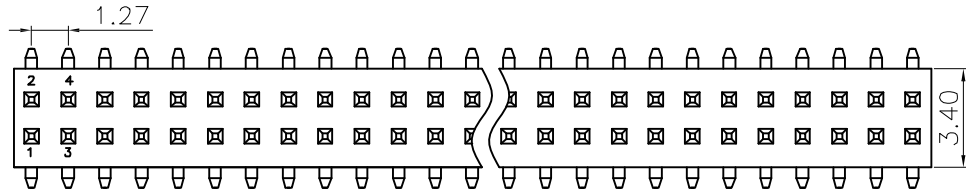


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER	140116	HANG

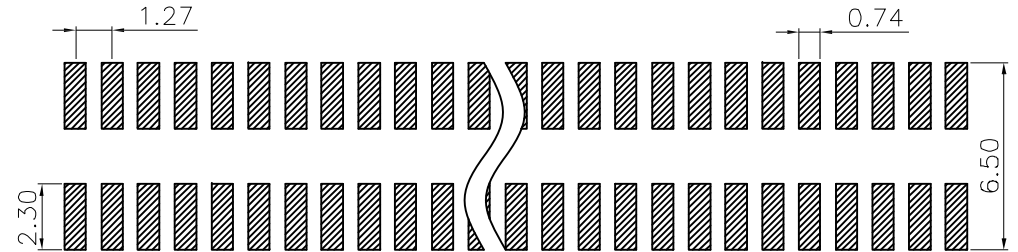


SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temp.: -40°C +105°C
 Max Processing Temp.: 230°C for 30 60seconds
 (Nylon-6T) (260°C for 10 seconds)
 Contact Material: Copper alloy
 Insulator Material: Nylon 6T
 (*Standard: 6T)
 Plated(*Standard): Gold flash all over

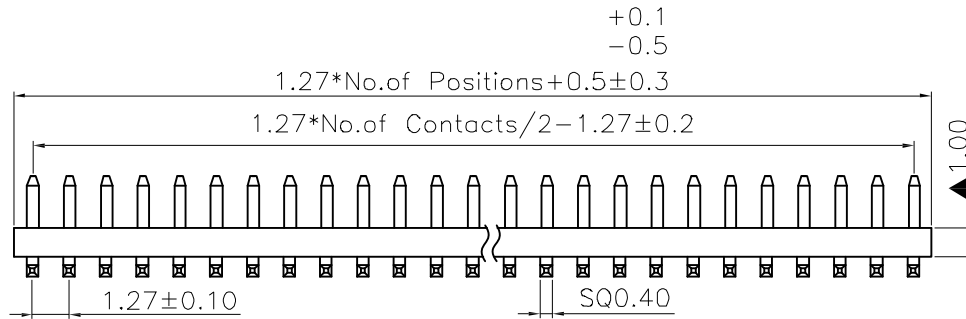

RECOMMENDED PCB LAYOUT
TOLLERANCE:±0.05



DIM	TOL	DIM	TOL
X.	±0.30	X".	±4.0"
X.X	±0.25	X.X"	±3.0"
X.XX	±0.20	X.XX"	±2.0"
X.XXX	±0.10	X.XXX"	±1.0"

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

<h1>LASTAR</h1>		深圳市朗思达科技有限公司 TEL:0755-27157971 FAX:0755-27157976 Http://www.lsdconn.com	
		DRAW NO. 12XX-1A50-95 DESIGN HANG CHECK WANGCM APPROVED HUYX	DATE 140116 140116 140116