
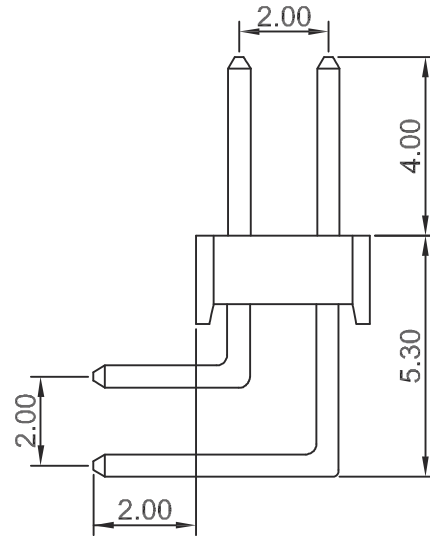


**\*所有原料材质，生产制程，电镀必须符合RoHS要求\***

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER	150116	RYAN
A1			针长由4.0mm改为2.0mm	181022	YINC

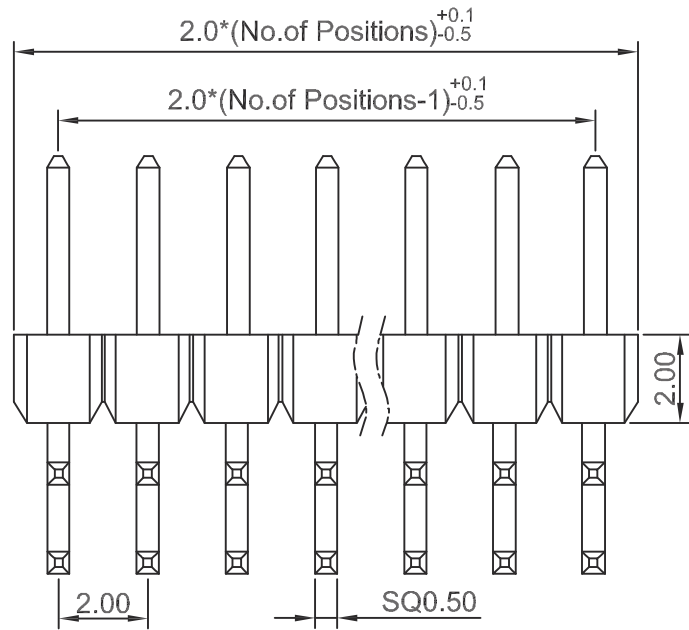


**SPECIFICATIONS**


Current Rating: 3 Amps  
 Insulator Resistance: 1000 Megohms min  
 Dielectric Withstanding: AC 500V  
 Operating Temp: -40°C+105°C  
 Contact Material: Copper alloy  
 Insulator Material: PBT

(\*Standard:PBT)

Plated(\*Standard):Gold flash all over

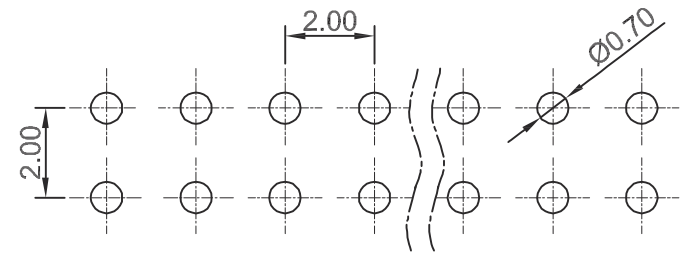

Recommended P.C.B Layout  
 General Tolerance±0.05

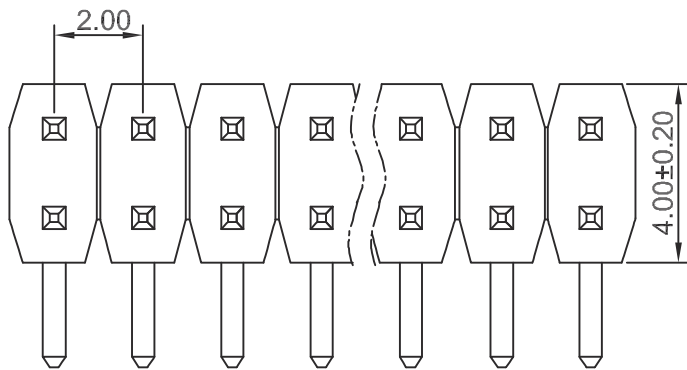

DIM	TOL	DIM	TOL
X.	±0.30	X'.	±4.0°
X.X	±0.25	X.X'	±3.0°
X.XX	±0.20	X.XX'	±2.0°
X.XXX	±0.10	X.XXX'	±1.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

<h1>LASTAR</h1>		Lastar Technology CO.,LTD TEL:0755-27157971 FAX:0755-27157976 Http://www.lsdconn.com					
		DRAW NO.	22XX-1C10-95	DATE		DRAW NAME:	Pin Header Pitch2.0mm DIP90° 2XnPin 针长2.0MM
DESIGN	YINC	181022		P/N NO.	PH-22XX-1C1F-95	SHORT CODE	
CHECK	WANGCM	181022		UNIT:	mm	SHEET:	N/A
APPROVED	HUYX	181022				MODEL	95
						REV. A1	SCALE N/A