





**\*所有原料材质，生产制程，电镀必须符合RoHS要求\***

|      |         |        |                     |        |        |
|------|---------|--------|---------------------|--------|--------|
| REV. | ECN NO. | LOCAS. | DESCRIPTION         | DATE   | DESIGN |
| A    |         |        | RELEASE TO CUSTOMER | 150116 | YINC   |
|      |         |        |                     |        |        |

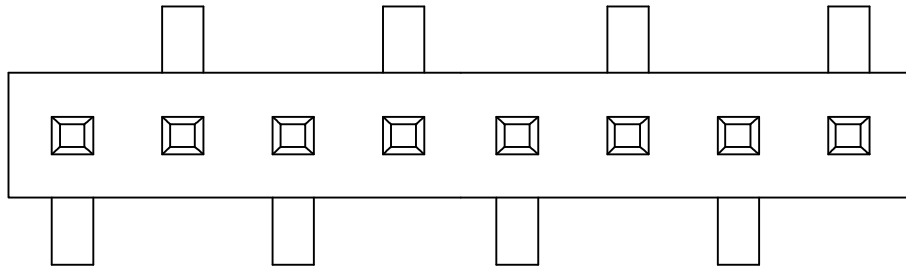

**SPCIFICATIONS**

Current rating: 1Amps  
 Insulator resistance: 500 Megchms min.  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40° to +105° C  
 Max Processing Temp: 230° for 30-60seconds  
 (260° for 10 seconds)  
 Contact Material: Phosphor Bronze  
 Insulator Material: 6T  
 Plating: Gold Flash  
 UNSPECIFIED TOLERANCE: ±0.20

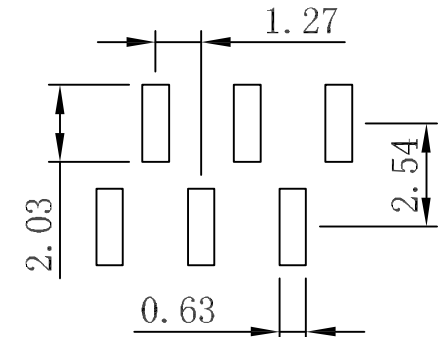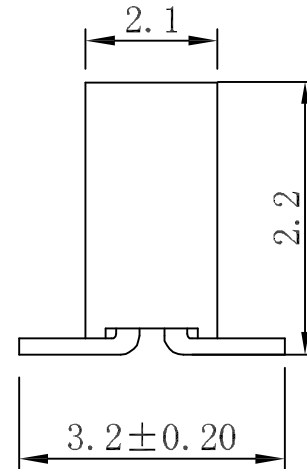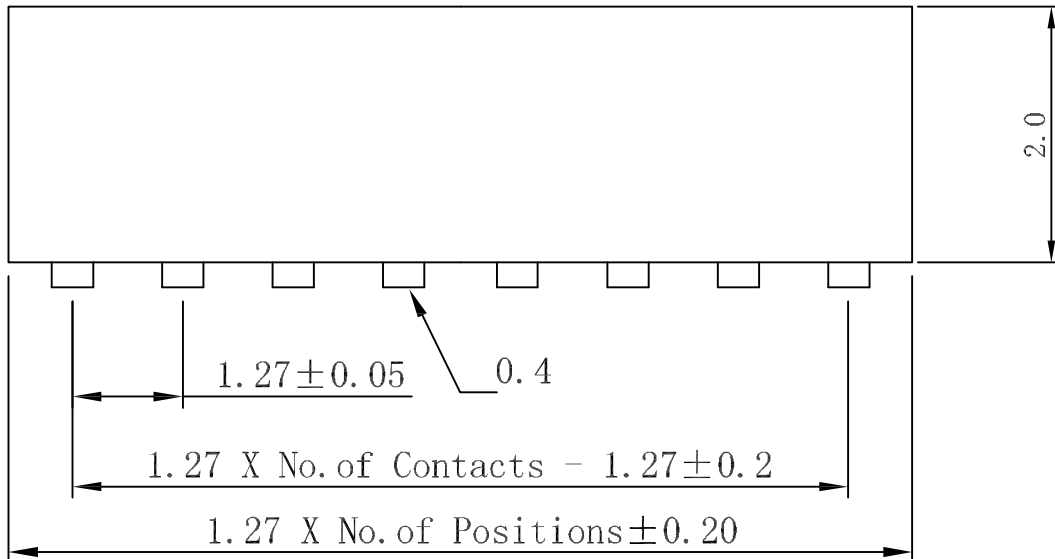

**B TYPE**  
 Recommended P.C.B Layout  
 General Tolerance ±0.05

|  |       |        |       |     |     |     |     |    |       |     |       |     |       |      |       |      |       |       |       |       |       |        |       |   |  |  |  |   |
|--|-------|--------|-------|-----|-----|-----|-----|----|-------|-----|-------|-----|-------|------|-------|------|-------|-------|-------|-------|-------|--------|-------|---|--|--|--|---|
| <table border="1"> <tr> <td>DIM</td> <td>TOL</td> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>X.</td> <td>±0.30</td> <td>X".</td> <td>±4.0"</td> </tr> <tr> <td>X.X</td> <td>±0.25</td> <td>X.X"</td> <td>±3.0"</td> </tr> <tr> <td>X.XX</td> <td>±0.20</td> <td>X.XX"</td> <td>±2.0"</td> </tr> <tr> <td>X.XXX</td> <td>±0.10</td> <td>X.XXX"</td> <td>±1.0"</td> </tr> </table> |       |        |       | DIM | TOL | DIM | TOL | X. | ±0.30 | X". | ±4.0" | X.X | ±0.25 | X.X" | ±3.0" | X.XX | ±0.20 | X.XX" | ±2.0" | X.XXX | ±0.10 | X.XXX" | ±1.0" | DRAW NO. 11XX-1A10-D0<br>DATE 150116<br>DESIGN YINC<br>CHECK ZHAOZZ<br>APPROVED HUXW<br>DATE 150116 | <br><a href="http://www.lsdconn.com">http://www.lsdconn.com</a><br><br><a href="http://www.asia-wt.com">http://www.asia-wt.com</a> | ■深圳朗思达 □香港朗思达<br>□东莞共营 □前海共赢<br><b>connector &amp; cable</b> | DRAW NAME: FH1.27 SMD 单排 排母系列<br>P/N NO. FH-11XX-1A10-D0<br>UNIT: mm<br>SHEET: N/A | SHORT CODE<br>MODEL D0<br>REV. A<br>SCALE N/A |
| DIM  | TOL   | DIM    | TOL   |     |     |     |     |    |       |     |       |     |       |      |       |      |       |       |       |       |       |        |       |   |  |  |  |   |
| X.   | ±0.30 | X".    | ±4.0" |     |     |     |     |    |       |     |       |     |       |      |       |      |       |       |       |       |       |        |       |   |  |  |  |   |
| X.X  | ±0.25 | X.X"   | ±3.0" |     |     |     |     |    |       |     |       |     |       |      |       |      |       |       |       |       |       |        |       |   |  |  |  |   |
| X.XX   | ±0.20 | X.XX"  | ±2.0" |     |     |     |     |    |       |     |       |     |       |      |       |      |       |       |       |       |       |        |       |   |  |  |  |   |
| X.XXX  | ±0.10 | X.XXX" | ±1.0" |     |     |     |     |    |       |     |       |     |       |      |       |      |       |       |       |       |       |        |       |   |  |  |  |   |

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION