

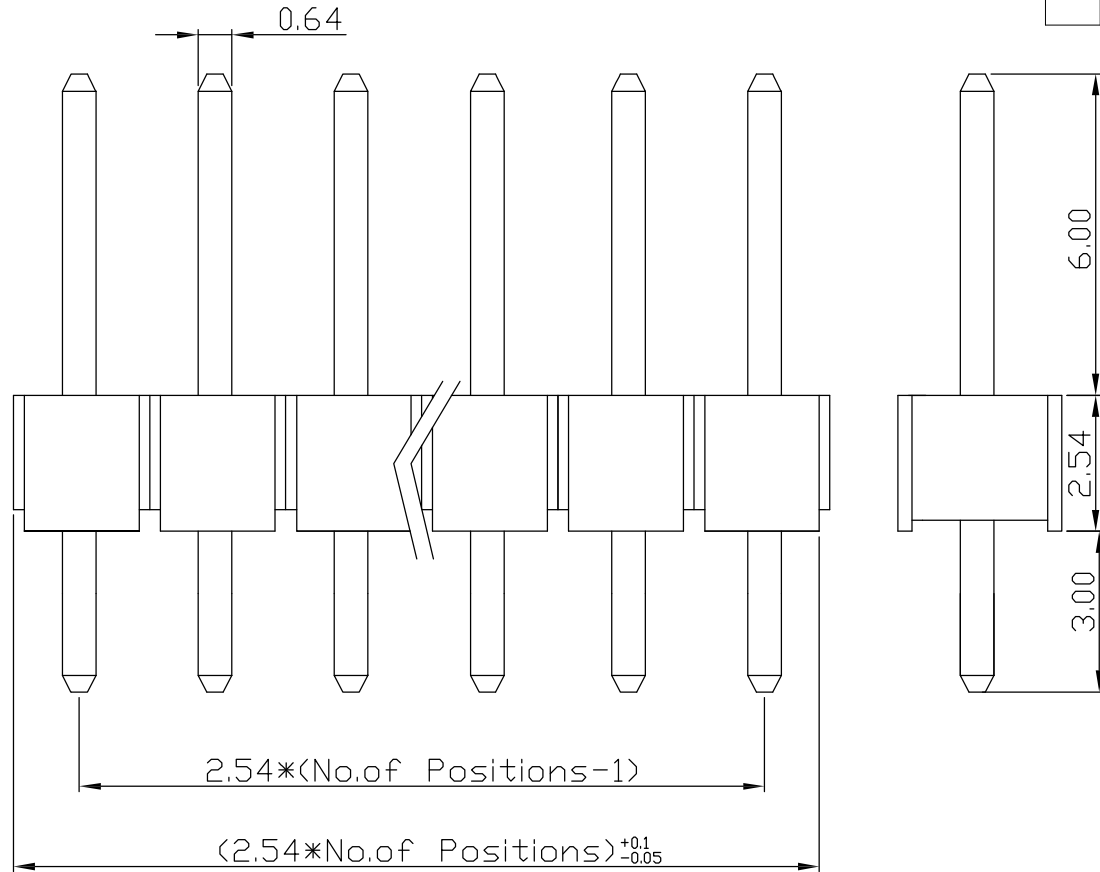


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
AO			RELEASE TO CUSTOMER	160226	RYAN

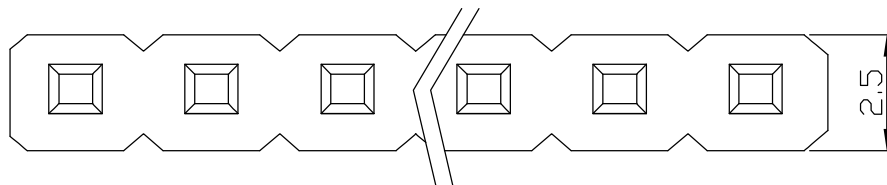

### SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator Resistance: 1000 Megohms min.  
 Dielectric Withstanding: AC 500V  
 Operating Temp: -40°C ~ +105°C  
 Contact Material: Copper alloy  
 Insulator Material: PBT+30%G.F (UL94V-0)  
 High Temperature Resistance: 240°  
 (\*Standard: PBT)  
 Plated (\*Standard): Gold flash all over

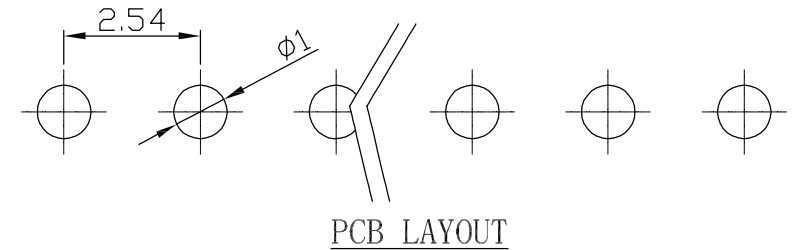

DIM	TOL	DIM	TOL
X.	±0.30	X'	±4.0°
X.X	±0.25	X.X'	±3.0°
X.XX	±0.20	X.XX'	±2.0°
X.XXX	±0.10	X.XXX'	±1.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

<b>LASTAR</b>		Lastar Technology CO., LTD	
DRAW NO.	31XX-1D20-95	DATE	160226
DESIGN	RYAN	DRAW NAME: Pin Header Pitch2.54mm DIP180°	
CHECK	WANGCM	P/N NO.	PH-31XX-1D20-95
APPROVED	HUYX	UNIT:	mm
		SHEET:	N/A
		MODEL:	95
		REV. AO	SCALE N/A