





所有原料材质，生产制程，电镀必须符合RoHS要求

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER	150116	RYAN

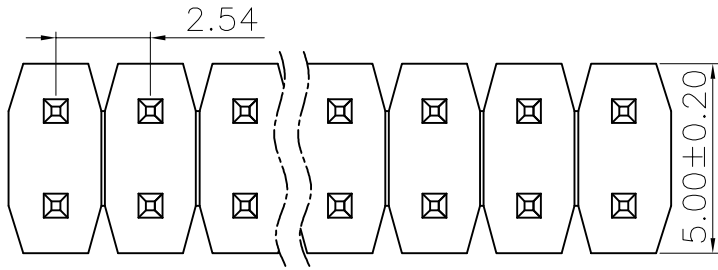

SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temp.: -40°C +105°C
 Contact Material: Copper alloy
 Insulator Material: PBT
 (*Standard: PBT)
 Plated(*Standard): Gold flash all over

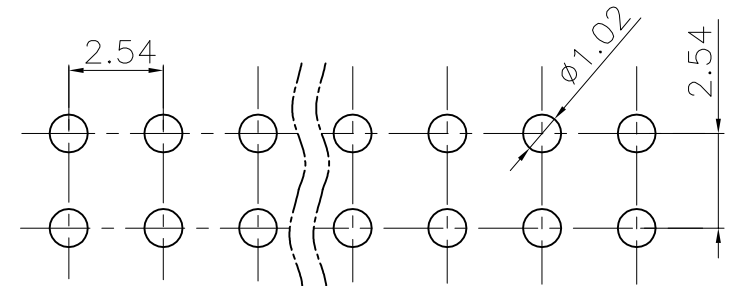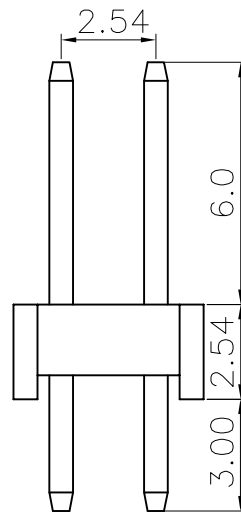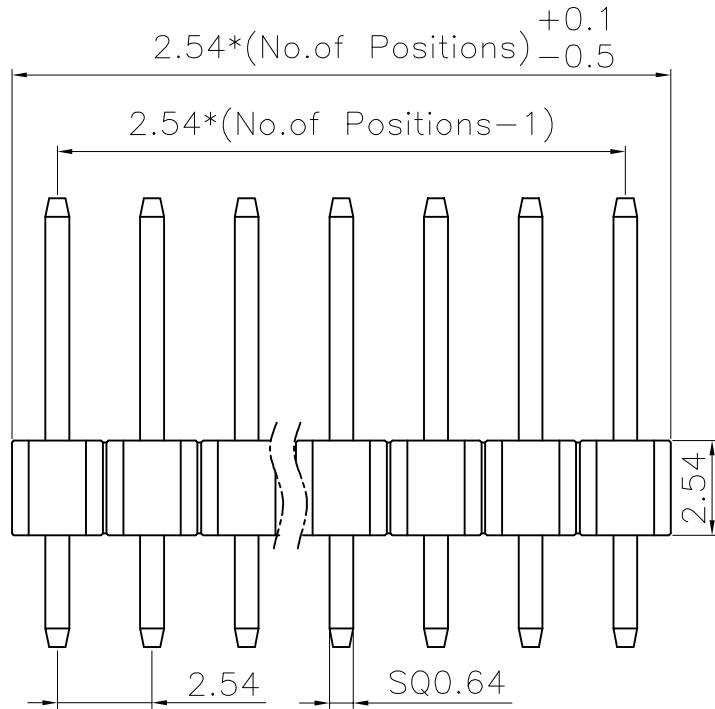

RECOMMENDED PCB LAYOUT
 TOLLERANCE: ±0.05

LASTAR

Lastar Technology CO., LTD

TEL:0755-27157971 FAX:0755-27157976 Http://www.lsdconn.com

DRAW NO.	32XX-1D23-95	DATE	DRAW NAME: Pin Header Pitch2.54mm 2*nPin 塑高2.54 上针长6.0 下针长3.0 DIP180°		
DESIGN	RYAN	150116	P/N NO.	PH-32XX-1D23-95	SHORT CODE
CHECK	WANGCM	150116	UNIT:	mm	MODEL
APPROVED	HUYX	150116	SHEET:	N/A	95
			REV.	A0	SCALE N/A

DIM	TOL	DIM	TOL
X.	±0.30	X'.	±4.0°
X.X	±0.25	X.X'	±3.0°
X.XX	±0.20	X.XX'	±2.0°
X.XXX	±0.10	X.XXX'	±1.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION