

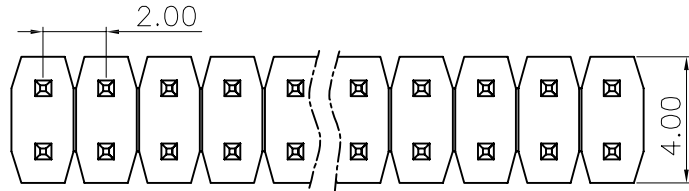
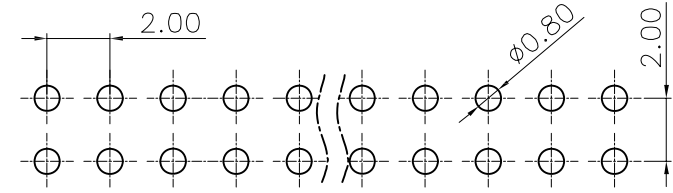


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			RELEASE TO CUSTOMER	111120	HANG



SPECIFICATIONS

Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temp.: -40°C +105°C
 Contact Material: Copper alloy
 Insulator Material: PBT
 (*Standard: PBT)
 Plated(*Standard): Gold flash all over

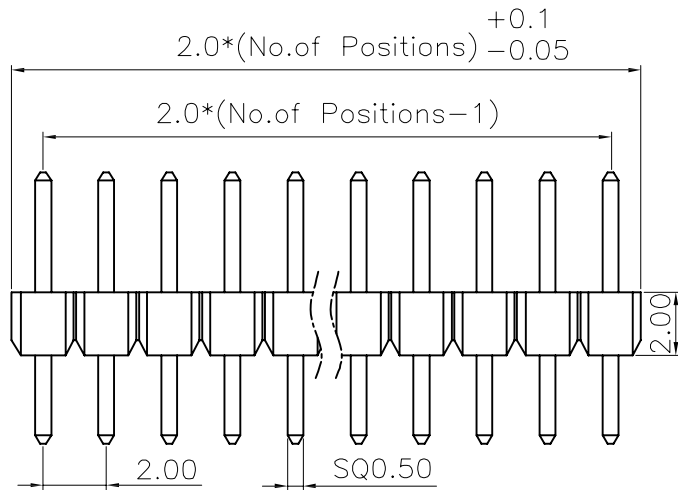

RECOMMENDED PCB LAYOUT
 TOLLERANCE:±0.05

LASTAR

Lastar Technology CO., LTD

DRAW NO.	22XX-1D10	DATE	DRAW NAME: Pin Header Pitch2.0mm 2*nPin DIP180°		
DESIGN	HANG	110205	P/N NO. PH-22XX-1D10-95		FILE:
CHECK	WANGCM	110205	UNIT: mm		MODEL:
APPROVED	HUYX	110205	SHEET: N/A	REV. A	SCALE N/A

DIM	TOL	DIM	TOL
X.	±0.30	X'.	±4.0°
X.X	±0.25	X.X'	±3.0°
X.XX	±0.20	X.XX'	±2.0°
X.XXX	±0.10	X.XXX'	±1.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION