
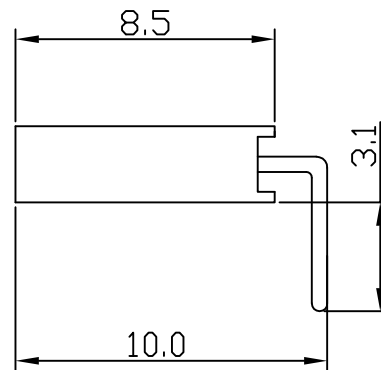



所有原料材质，生产制程，电镀必须符合RoHS要求

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER	150116	RYAN

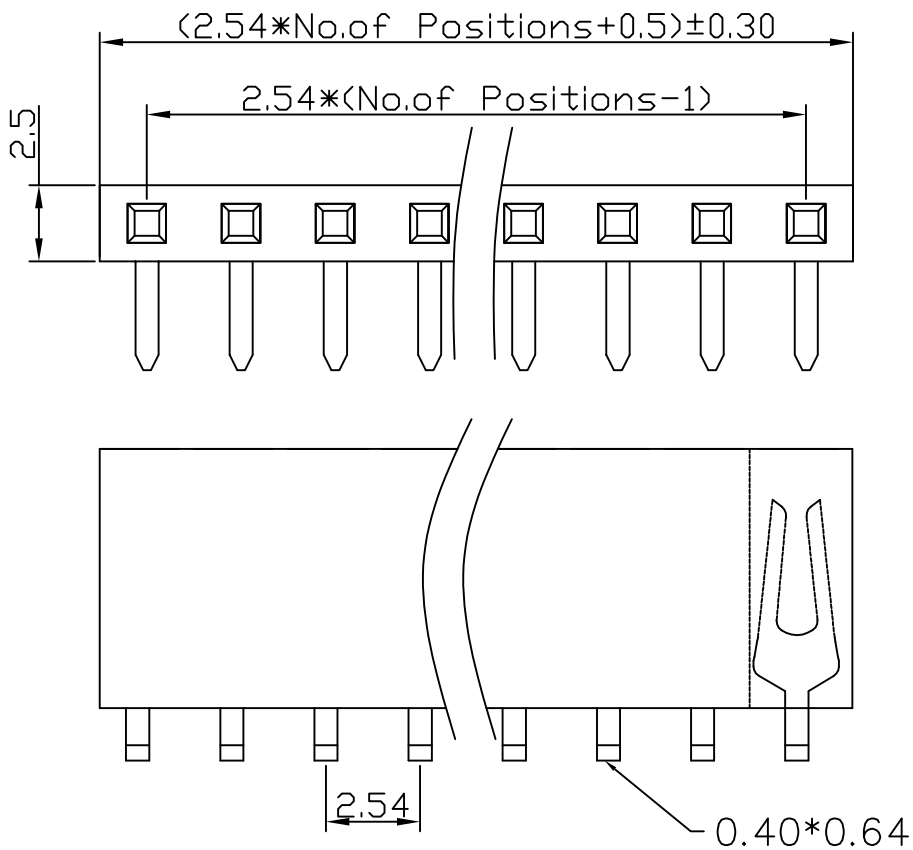

SPECIFICATIONS

Current Rating: 3Amps
 Insulator Resistance: 1000 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temp.: -40°C ~ +105°C
 Contact Material: Brass
 Insulator Material: PBT (UL94V-0)
 Plated (*Standard): Gold flash all over

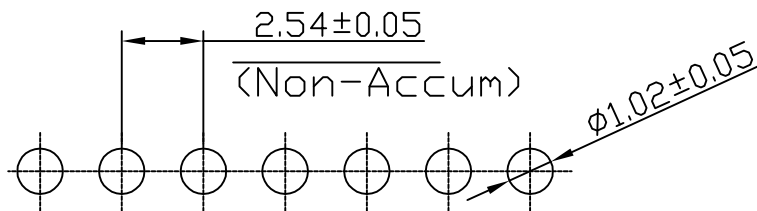

Recommended P.C.B Layout
 General Tolerance ±0.05

DIM	TOL	DIM	TOL
X.	±0.30	X'.	±4.0'
X.X	±0.25	X.X'	±3.0'
X.XX	±0.20	X.XX'	±2.0'
X.XXX	±0.10	X.XXX'	±1.0'

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

LASTAR			Lastar Technology CO., LTD		
			TEL:0755-27157971 FAX:0755-27157976 Http://www.lsdconn.com		
DRAW NO.	31XX-1C27-95	DATE	DRAW NAME: Female Header Pitch 2.54mm 1*8PIN DIP90° 型高8.5 针长3.10		
DESIGN	RYAN	150116	P/N NO.	FH-31XX-1C27-95	SHORT CODE
CHECK	WANGCM	150116	UNIT:	SHEET:	MODEL
APPROVED	HUYX	150116	mm	N/A	95
			REV. A0	SCALE N/A	