


所有原料材质，生产制程，电镀必须符合RoHS要求

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			RELEASE TO CUSTOMER	150116	YINC

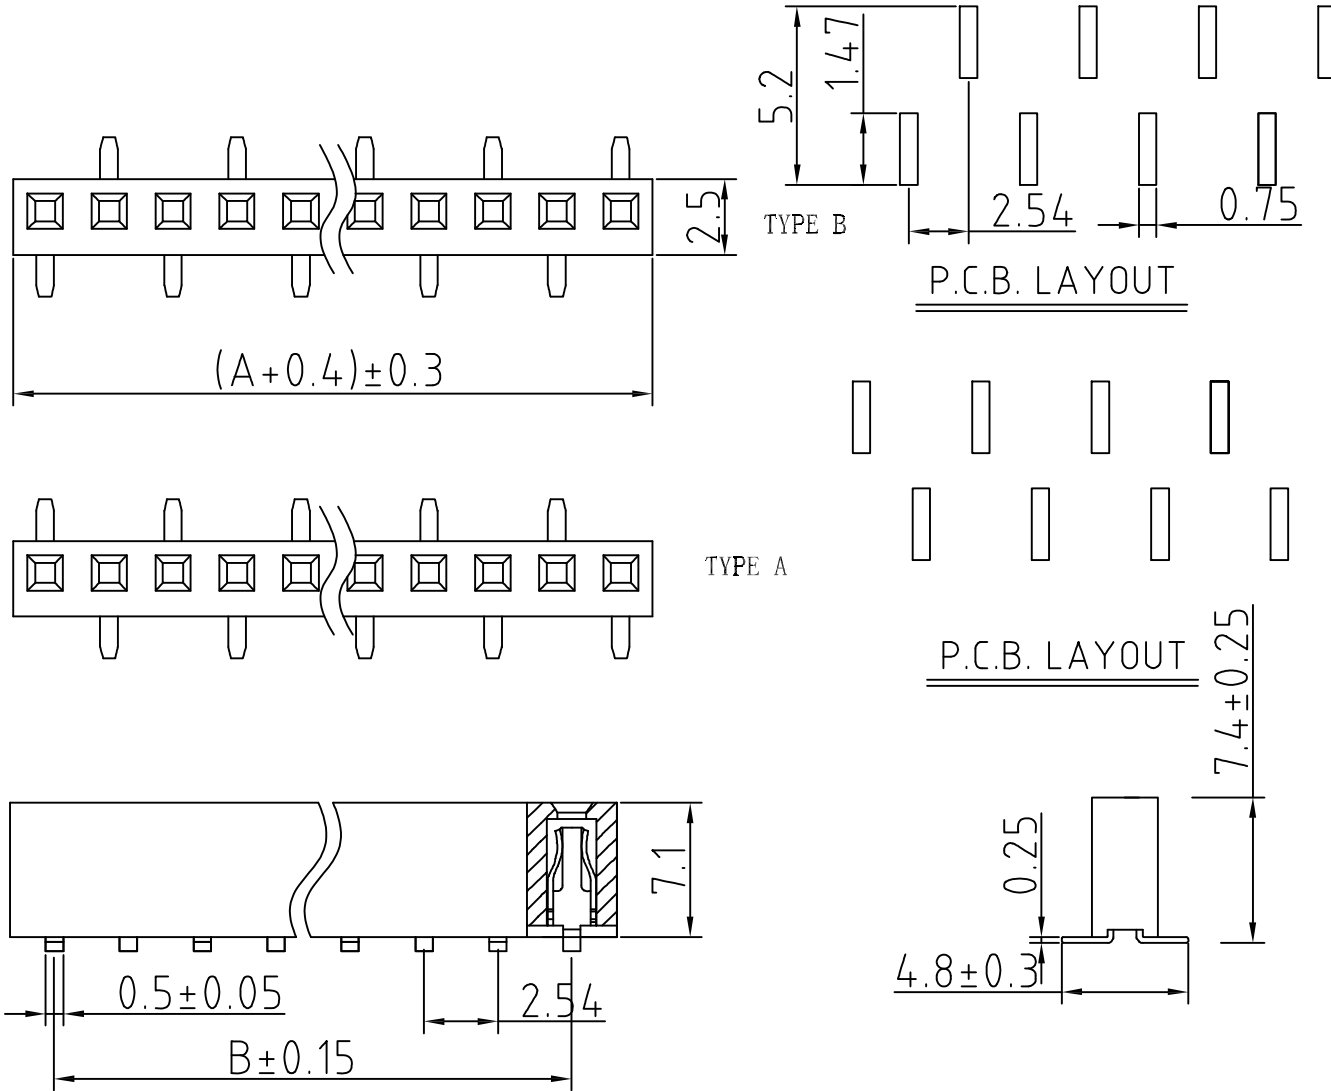

SPECIFICATIONS:

Current Rating: 3Amps
 Insulator Resistance: 1000Megohms min
 Dielectric withstanding: AC 1000V
 Operating Temperature: -55°~+105°
 Max Processing Temp: 260°for 5~10 seconds
 Contact Material: Brass
 Insulator Material: PA6T UL94V-0
 Plating: G/F

Contacts Per Row	Dimensions		Contacts Per Row	Dimensions	
	A	B		A	B
			1x21pin	53.34	50.8
1x2pin	5.08	2.54	1x22pin	55.88	53.34
1x3pin	7.62	5.08	1x23pin	58.42	55.88
1x4pin	10.16	7.62	1x24pin	60.96	58.42
1x5pin	12.7	10.16	1x25pin	63.5	60.96
1x6pin	15.24	12.7	1x26pin	66.04	63.5
1x7pin	17.78	15.24	1x27pin	68.58	66.04
1x8pin	20.32	17.78	1x28pin	71.12	68.58
1x9pin	22.86	20.32	1x29pin	73.66	71.12
1x10pin	25.4	22.86	1x30pin	76.2	73.66
1x11pin	27.94	25.4	1x31pin	78.74	76.2
1x12pin	30.48	27.94	1x32pin	81.28	78.74
1x13pin	33.02	30.48	1x33pin	83.82	81.28
1x14pin	35.56	33.02	1x34pin	86.36	83.82
1x15pin	38.1	35.56	1x35pin	88.9	86.36
1x16pin	40.64	38.1	1x36pin	91.44	88.9
1x17pin	43.18	40.64	1x37pin	93.98	91.44
1x18pin	45.72	43.18	1x38pin	96.52	93.98
1x19pin	48.26	45.72	1x39pin	99.06	96.52
1x20pin	50.8	48.26	1x40pin	101.6	99.06

DIM	TOL	DIM	TOL
X.	±0.30	X".	±4.0"
X.X	±0.25	X.X"	±3.0"
X.XX	±0.20	X.XX"	±2.0"
X.XXX	±0.10	X.XXX"	±1.0"

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DRAW NO.	31XX-1A71-37	DATE	
DESIGN	YINC	150116	
CHECK	ZHAOZZ	150116	
APPROVED	HUXW	150116	



深圳朗思达 香港朗思达
东莞共营 前海共赢

connector & cable

DRAW NAME:		母排2.54 单排塑胶 SMT H7.1	
P/N NO.	FH-31XX-1A71-37	SHORT CODE	40100103
UNIT:	mm	MODEL	37
SHEET:	N/A	REV. A	SCALE N/A