





REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			RELEASE TO CUSTOMER	130205	HANG

1. Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

2. Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

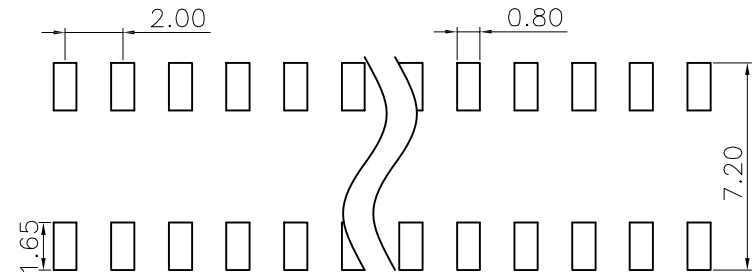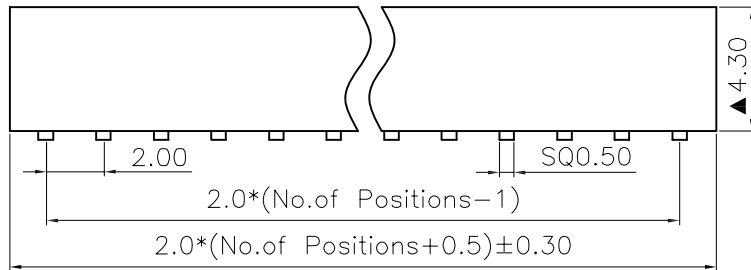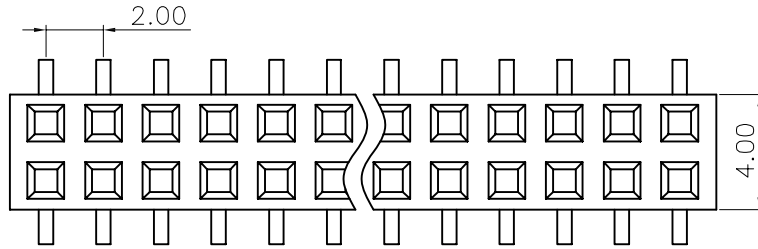

RECOMMENDED PCB LAYOUT
 TOLLERANCE: ±0.05

LASTAR

Lastar Technology CO., LTD

DRAW NO.		DATE	DRAW NAME: Female Header Pitch2.0 SMT90° 2*NPIN 4.3H		
DESIGN	HANG	130205	P/N NO. FH-22XX-1A30-95		FILE:
CHECK			UNIT: mm		MODEL:
APPROVED			SHEET: N/A	REV. A	SCALE N/A

DIM	TOL	DIM	TOL
X.	±0.30	X".	±4.0°
X.X	±0.25	X.X"	±3.0°
X.XX	±0.20	X.XX"	±2.0°
X.XXX	±0.10	X.XXX"	±1.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION