

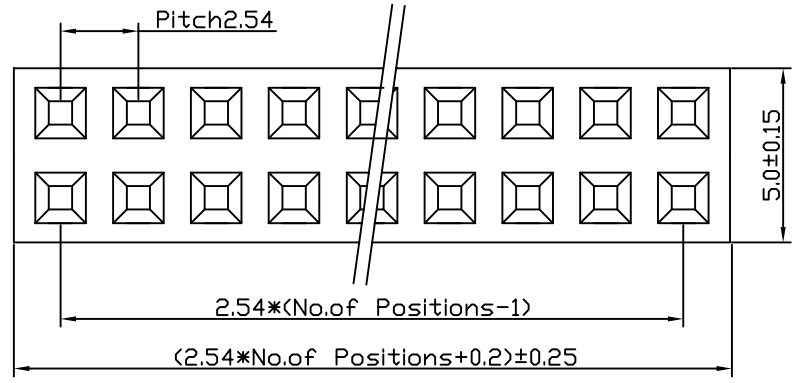
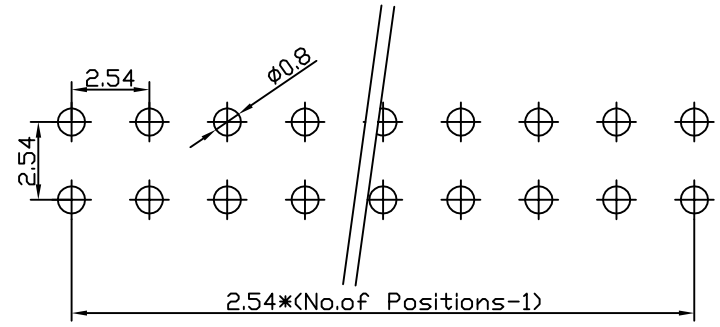


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER		HANG

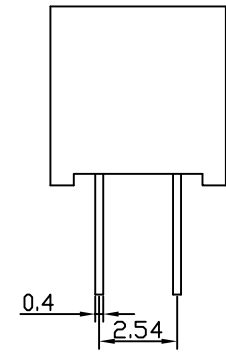

SPECIFICATIONS:

Current Rating: 3 Amp
 Insulator Resistance: 1000 Megohms min.
 Dielectric Withstanding: AC 500V
 Operating Temp. : -40°C ~ +105°C
 Max Processing Temp. : 230°C for 30~60 seconds
 (260° C for 10 seconds)
 Contact Material: Phosphor Bronze
 Insulator Material: PBT or LCP (UL94V-0)
 (Standard: PBT)
 Plated (*Standard): Gold Flash all over

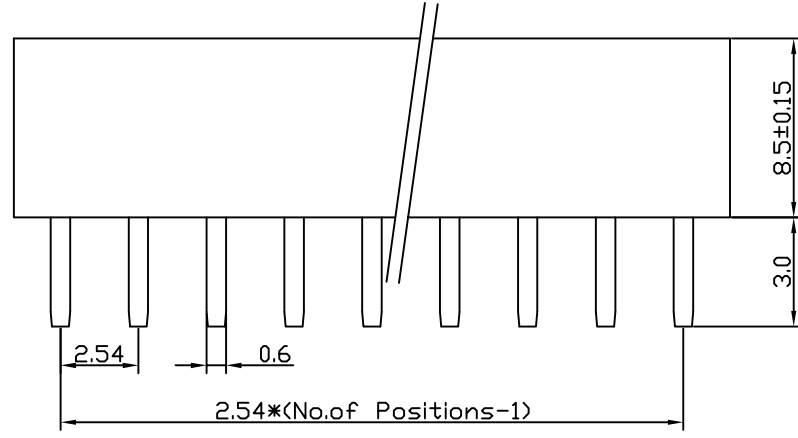

PCB LAYOUT

DIM	TOL	DIM	TOL
X.	±0.30	X'	±4.0°
X.X	±0.25	X.X'	±3.0°
X.XX	±0.20	X.XX'	±2.0°
X.XXX	±0.10	X.XXX'	±1.0°

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

LASTAR		Lastar Technology CO., LTD			
DRAW NO.	32XX-1DH7-95	DATE	DRAW NAME: Female Header Pitch2.54mm 2*nPin DIP180°		
DESIGN	HANG	090505	P/N NO. FH-32XX-1DH7-95		FILE:
CHECK	WANGCM	090506	UNIT: mm		MODEL:
APPROVED	HUYX	090506	SHEET: N/A	REV. A0	SCALE N/A