


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
AO			RELEASE TO CUSTOMER		HANG


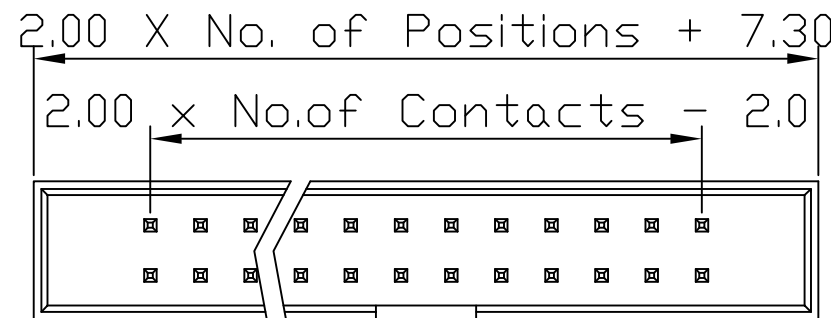


Electrical Data:


Current rating: 2Amps
 Dielectric Withstanding Voltage: 500VAC for one minute
 Contact Resistance: < 20 mΩ
 Insulation Resistance: > 1000 MΩ
 Operating Temperature: -40° C ~ +105° C

Construction:

Insulator: Black Glass Filled Polyester
 Flammability Rating: UL 94V-0
 Contacts: Phosphor Bronze or copper alloy
 Contacts plating: Selective gold on surface contact area

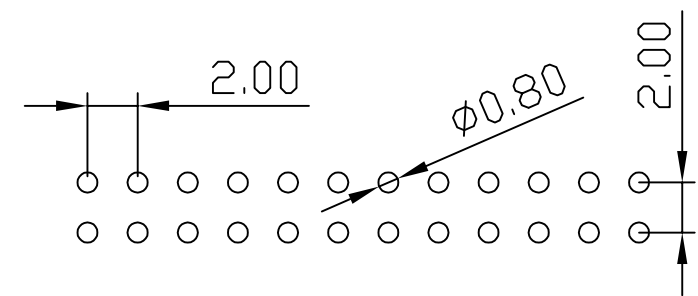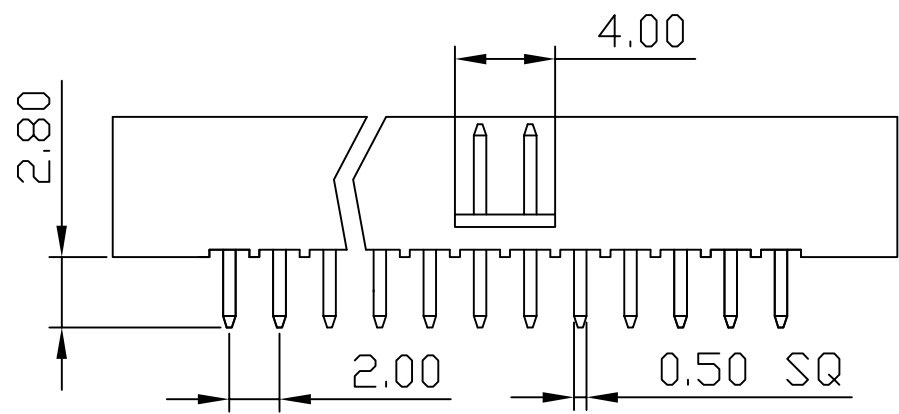

P.C.B Layout

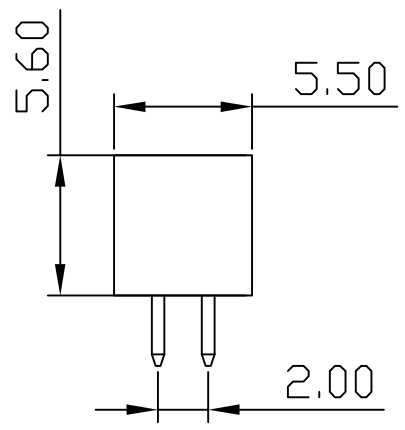

DIM	TOL	DIM	TOL
X.	±0.30	X".	±4.0"
X.X	±0.25	X.X"	±3.0"
X.XX	±0.20	X.XX"	±2.0"
X.XXX	±0.10	X.XXX"	±1.0"

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

LASTAR		Lastar Technology CO.,LTD			
DRAW NO.	200-2XX-95-D11	DATE	DRAW NAME: BOX Header PH2.0mm 双排 DIP180°		
DESIGN	HANG	070505	P/N NO. BH-200-2XX-95-D11		FILE:
CHECK	WANGCM	070506	UNIT: mm		MODEL:
APPROVED	HUYX	070506	SHEET: N/A		REV. A0
					SCALE N/A