


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0					HANG

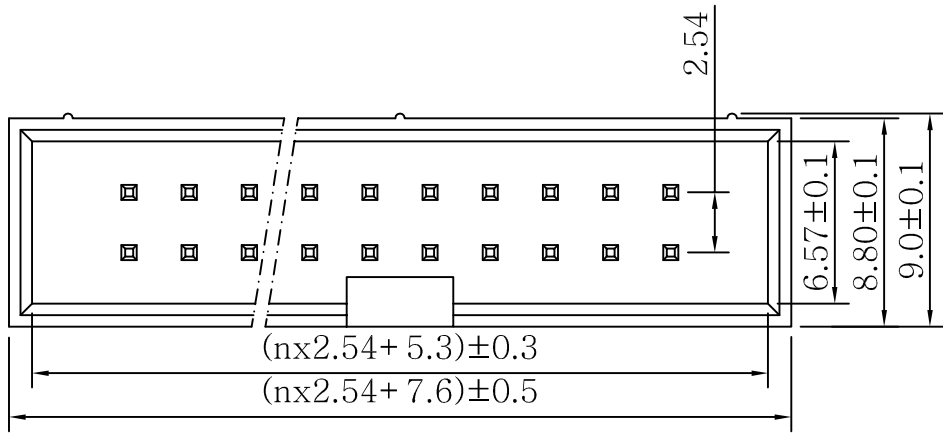

Technical data:

Housing : PBT (UL94V-0). Black

Terminal : S. Q0. 64mm Brass, Gold plating

Current Rating : 1Amp Max.

Dielectric Withstanding Voltage:

600V AC R.M.S. for one minute.




Insulation Resistance : 5000M ohms Min

AT 500V DC

Contact Resistance : 30m ohms Max.

Operating Temperature :  $-55^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

Max Processing Temp :  $220^{\circ}\text{C}$  for 10 seconds.

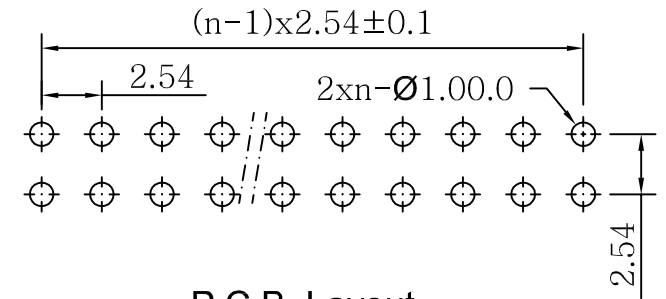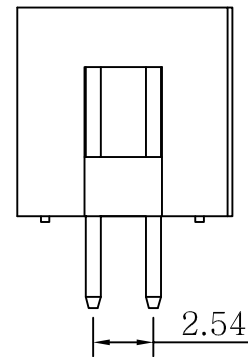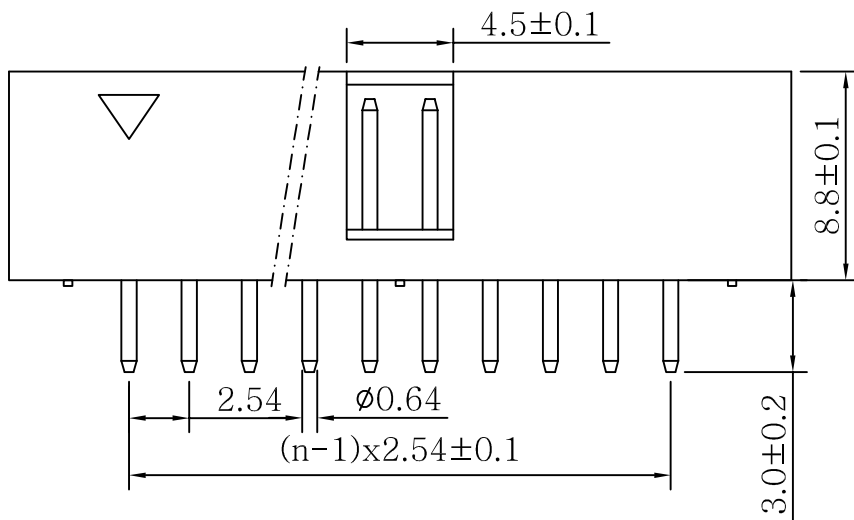

P.C.B Layout

$$3 \leq n \leq 40$$

**LASTAR**

Lastar Technology CO., LTD

DRAW NO.	254-2XX-95-D22	DATE	DRAW NAME: <b>Box Header Pitch2.54mm 2*nPin DIP180°</b>		
DESIGN	HANG	070505	P/N NO. BH-254-2XX-95-D22		FILE:
CHECK	WANGCM	070506	UNIT: mm		MODEL:
APPROVED	HUYX	070506	SHEET: N/A	REV. A0	SCALE N/A