
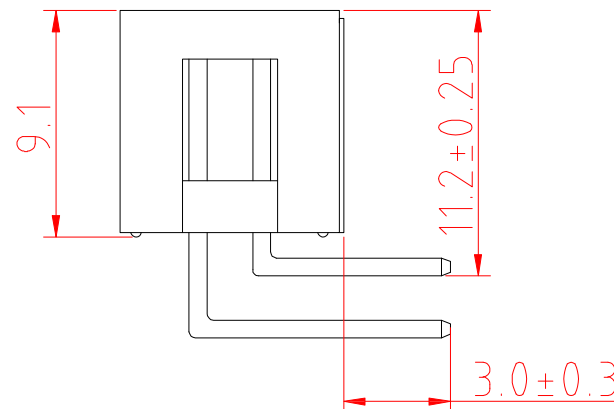
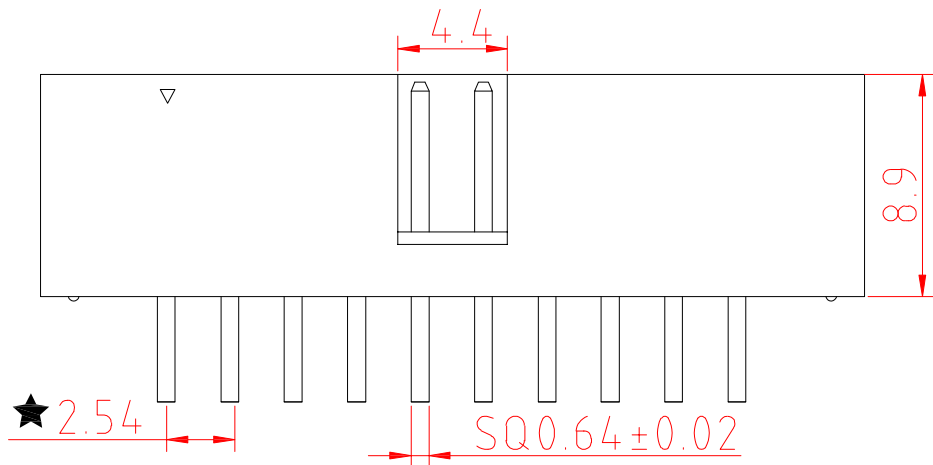
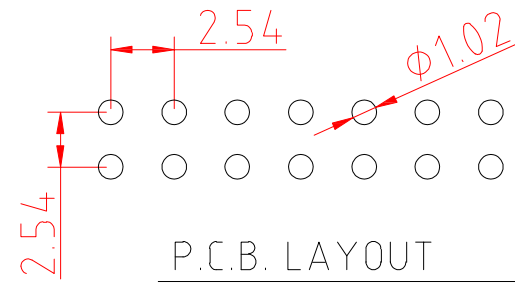


**\*所有原料材质，生产制程，电镀必须符合RoHS要求\***

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			RELEASE TO CUSTOMER	150116	YINC

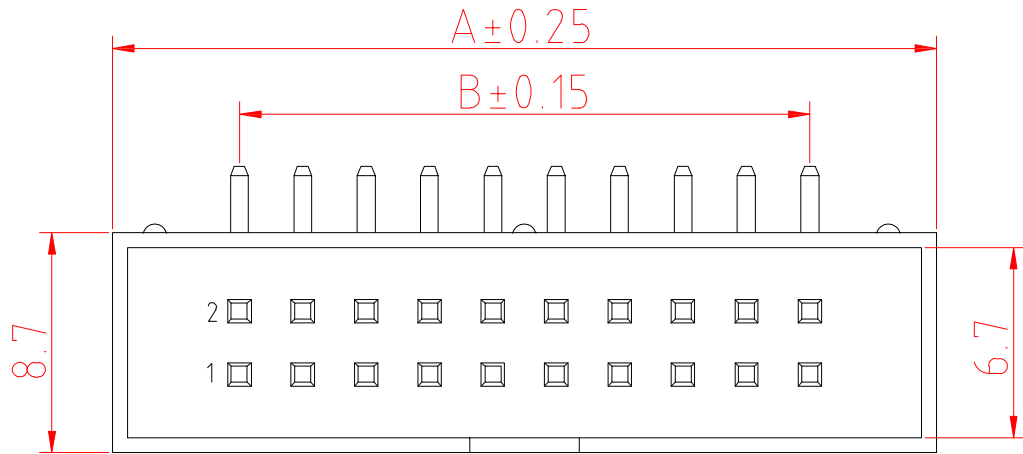

Contacts Per Row	Dimensions	
	A	B
2×5pin	20.4	10.16
2×6pin	22.94	12.70
2×7pin	25.48	15.24
2×8pin	28.02	17.78
2×10pin	33.10	22.86
2×12pin	38.18	27.94
2×13pin	40.72	30.48
2×15pin	45.80	35.56
2×17pin	50.88	40.64
2×20pin	58.50	48.26
2×22pin	63.58	53.34

**SPECIFICATIONS:**

Current Rating: 3Amp  
 Insulator Resistance: 1000Megohms min  
 Dielectric withstanding: AC 500V  
 Operating Temperature: -40°~+85°  
 Max Processing Temp: 260°for 5~10 seconds  
 Contact Material: Brass  
 Insulator Material: PA6T UL94V-0

Plating: G/F  
 Color: Black

DIM	TOL	DIM	TOL
X.	±0.30	X'	±4.0"
X.X	±0.25	X.X'	±3.0"
X.XX	±0.20	X.XX'	±2.0"
X.XXX	±0.10	X.XXX'	±1.0"

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DRAW NO.	254-2XX-95-C21	DATE	
DESIGN	YINC	150116	
CHECK	ZHAOZZ	150116	
APPROVED	HUXW	150116	



深圳朗思达 
  香港朗思达  
 东莞共营 
  前海共赢

**connector & cable**

DRAW NAME: 筒牛2.54 2\*NPIN DIP90

P/N NO.	BH-254-2XX-95-C21	SHORT CODE	
UNIT:	mm	SHEET:	N/A
MODEL	95	REV.	A
SCALE	N/A		

L=0.64\*16.0/21.0mm