


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER		HANG
C					HANG

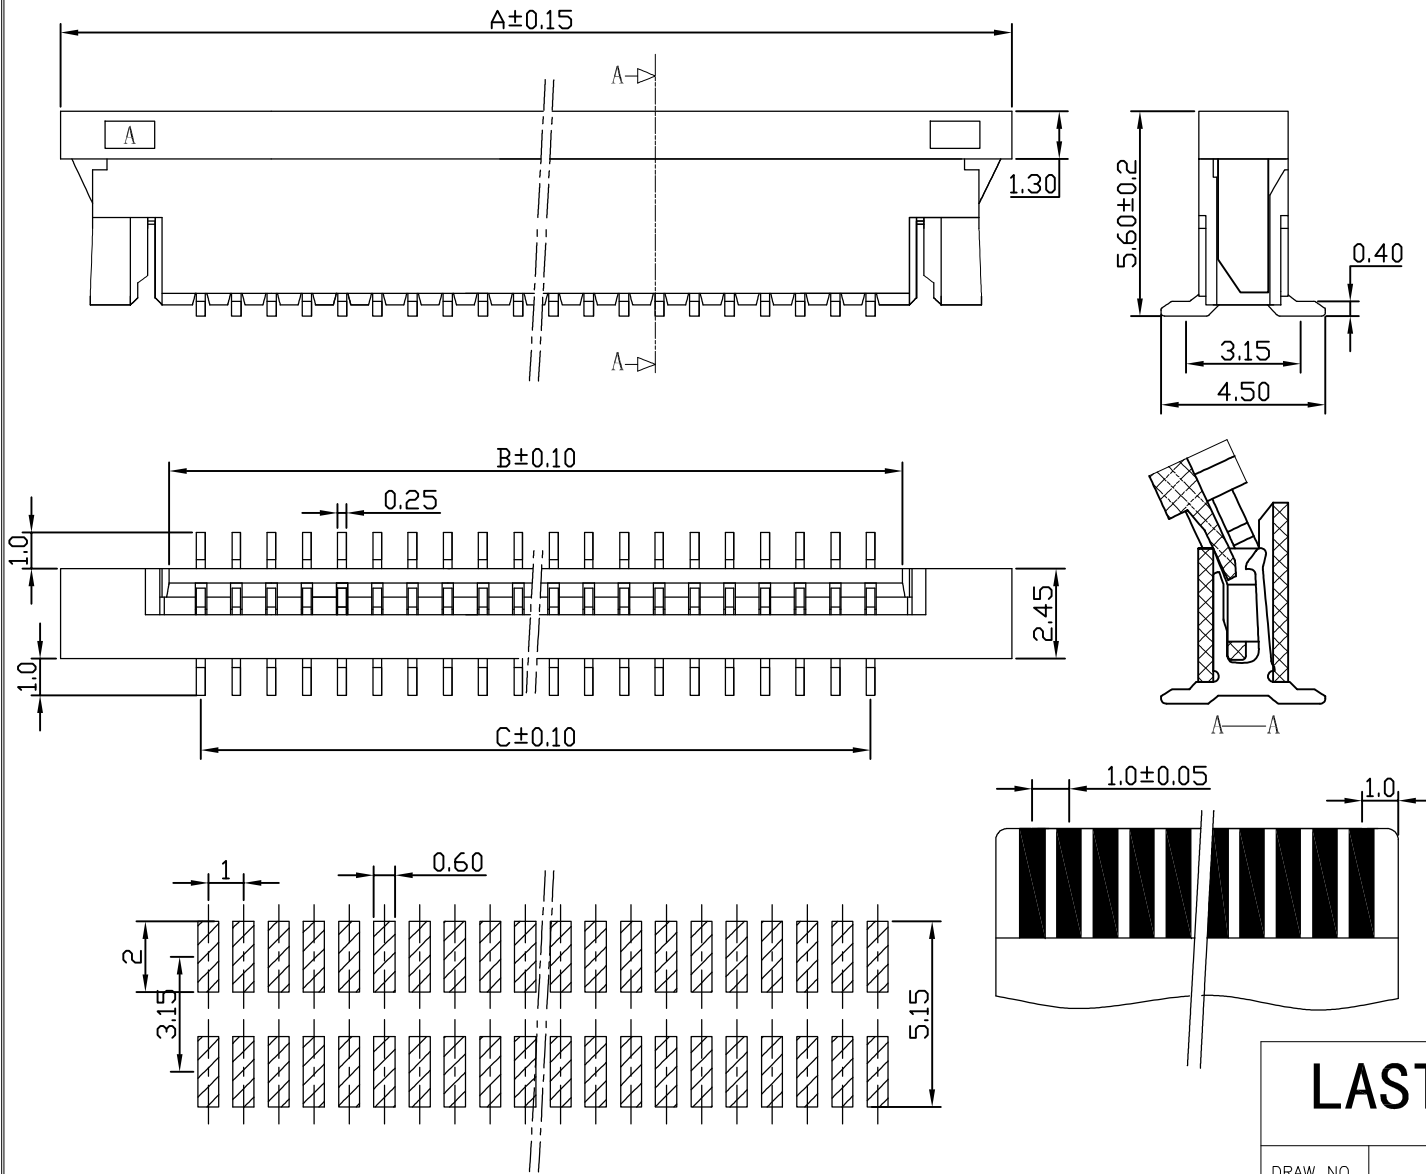

PIN数	A	B	C	PIN数	A	B	C
3	10.0	4.1	2.0	22	29.0	23.1	21.0
4	11.0	5.1	3.0	23	30.0	24.1	22.0
5	12.0	6.1	4.0	24	31.0	25.1	23.0
6	13.0	7.1	5.0	25	32.0	26.1	24.0
7	14.0	8.1	6.0	26	33.0	27.1	25.0
8	15.0	9.1	7.0	27	34.0	28.1	26.0
9	16.0	10.1	8.0	28	35.0	29.1	27.0
10	17.0	11.1	9.0	29	36.0	30.1	28.0
11	18.0	12.1	10.0	30	37.0	31.1	29.0
12	19.0	13.1	11.0	31	38.0	32.1	30.0
13	20.0	14.1	12.0	32	39.0	33.1	31.0
14	21.0	15.1	13.0	33	40.0	34.1	32.0
15	22.0	16.1	14.0	34	41.0	35.1	33.0
16	23.0	17.1	15.0	35	42.0	36.1	34.0
17	24.0	18.1	16.0	36	43.0	37.1	35.0
18	25.0	19.1	17.0	37	44.0	38.1	36.0
19	26.0	20.1	18.0	38	45.0	39.1	37.0
20	27.0	21.1	19.0	39	46.0	40.1	38.0
21	28.0	22.1	20.0	40	47.0	41.1	39.0

- 1.Voltage: 50V AC (rms)/DC
- 2.Current: 0.5A AC (rms)/DC
- 3.Contact Resistance: 30mΩ max(initial)
- 4.Dielectric Withstanding Voltage: 250V AC/rms
- 5.Insulation Resistance:500MΩ min
- 6.Operating Temp:-20°C+85°C

P.C.B Layout

DIM	TOL	DIM	TOL
X.	±0.30	X'.	±4.0'
X.X	±0.25	X.X'	±3.0'
X.XX	±0.20	X.XX'	±2.0'
X.XXX	±0.10	X.XXX'	±1.0'

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

**LASTAR**

Lastar Technology CO., LTD

TEL:0755-27157971 FAX:0755-27157976 Http://www.lsdconn.com

DRAW NO.		DATE	DRAW NAME: FPC Pitch1.0mm 立贴 拉拔式 带锁	
DESIGN	HANG	140116	P/N NO. FPC-105-11J-XX31	FILE:
CHECK	WANGCM	140116	UNIT: mm	MODEL:
APPROVED	HUYX	140116	SHEET: N/A	REV. C
			SCALE	N/A