

02P~09P

■ SPECIFICATIONS

- Voltage Rating : 100V AC/DC
- Current Rating : 1.0A AC/DC
- Withstand Voltage : 500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature Range : -25°C ~ +85°C
- Contact resistance : 30mΩ max

■ HOUSING



- Part No.:GJS-12252-XX HK

① ②




① Poles No : 02~30

② HK : 有鎖扣

- Material : Nylon 66 UL94V-0, White
- Use With: GJS-12252-TP Terminal
- Use With: GJS-1235R2-XXHK Wafer
- Packaging: Bag

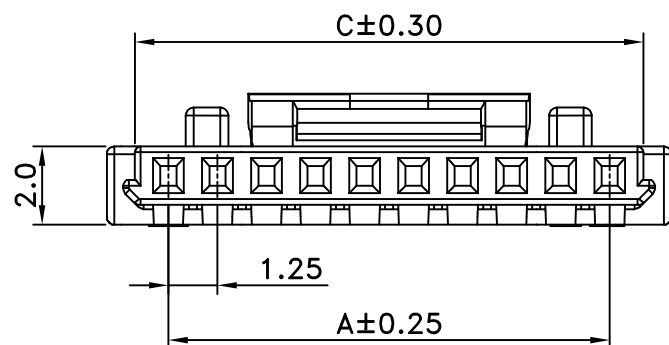

10P~30P

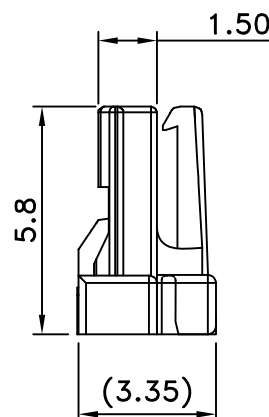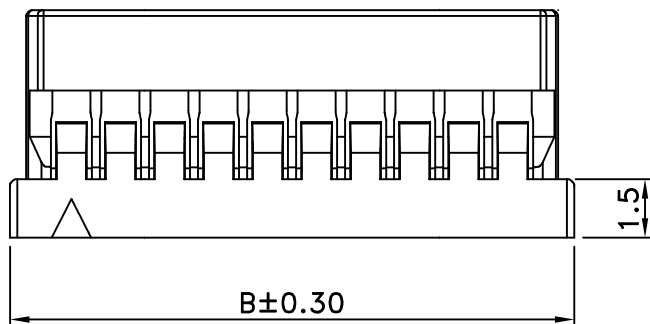

10P~30P

Poles	Dimension(mm)		
	A	B	C
02	1.25	4.40	2.75
03	2.50	5.65	4.00
04	3.75	6.90	5.25
05	5.00	8.15	6.50
06	6.25	9.40	7.75
07	7.50	10.65	9.00
08	8.75	11.90	10.25
09	10.00	13.15	11.50
10	11.25	14.40	12.75
11	12.50	15.65	14.00
12	13.75	16.90	15.25
13	15.00	18.15	16.50
14	16.25	19.40	17.75
15	17.50	20.65	19.00
20	23.75	26.90	25.25
25	30.00	33.15	31.50
30	36.25	39.40	37.75





东莞乔唯电子有限公司
DONGGUAN CHYAO WEI
ELECTRONIC CO., LTD


APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
張育瑞		mm	.0 ±0.30	△				△			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	△				△			
曾慶根	⊕	a0	.000 ±0.10	△				△			
DRAWN BY	DATE	SIZE	ANGLE	△					CUSTOMER		
曾慶根	2022/06/10	A4	0° ±1°	△							
			.0° ±	△					Conforms to The RoHS Instruction		
			SHEET 1/1	△							

PART NO/GJS-12252-XXHK


1.25mm Connectors Receptacle Housing

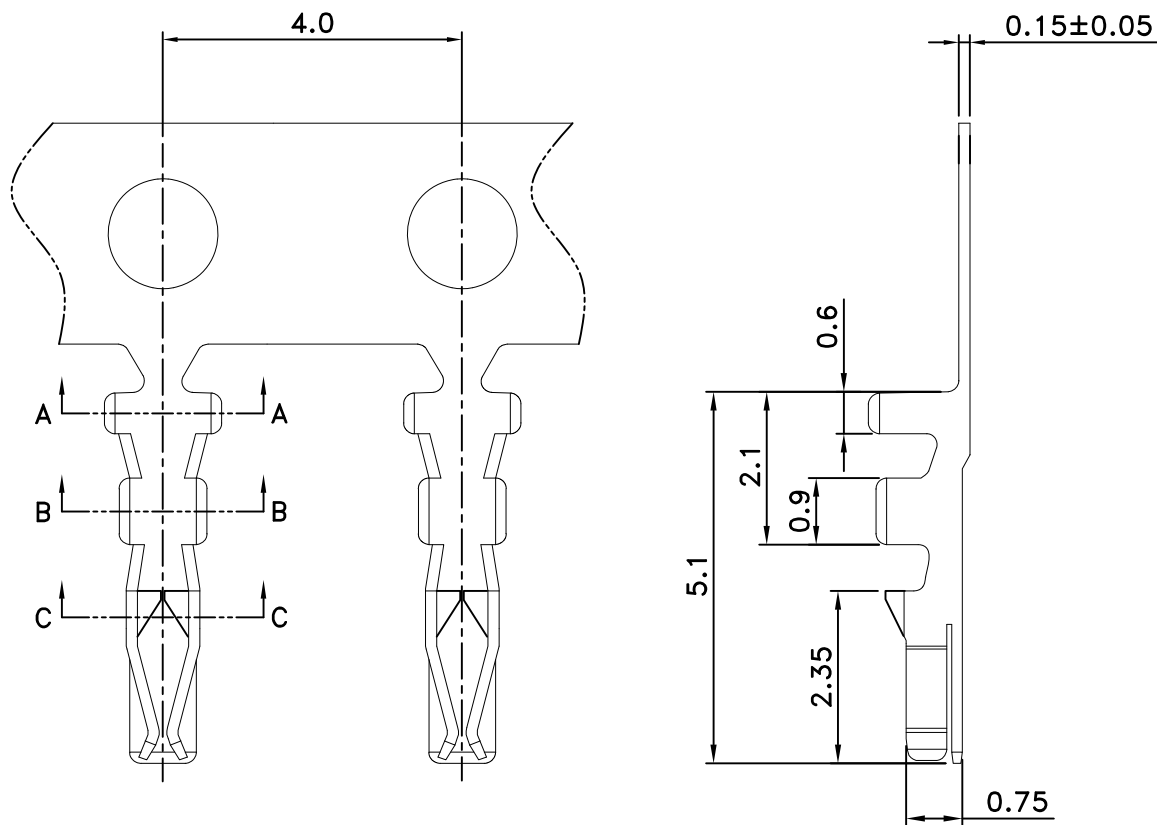

SEC:A-A



SEC:B-B



SEC:C-C

SPECIFICATIONS

- Voltage Rating : 100V AC/DC
- Current Rating : 1.0A AC/DC
- Withstand Voltage : 500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature Range : -25℃ ~ +85℃
- Contact resistance : 30mΩ max

TERMINAL

- Part No. : GJS-12252-TP (X)
① ②

① TP : 先沖后鍍

② Plated :

Blank: Tin Plated

G : Gold Plated

- Material : Phosphor Bronze
- Applicable Wires : AWG# 28-32
- Thickness : 0.15mm
- Q' ty : 15,000 Pcs./Reel
- Mates With: GJS-12252-XXHK Housing



东莞乔唯电子有限公司
DONGGUAN CHYAO WEI
ELECTRONIC CO., LTD

PART NO GJS-12252-TP(X)

1.25mm Crimp Style Connectors Terminal

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
張育瑞		mm	.0 ±0.30	△				△			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	△				△			
曾慶根	⊕	a0	.000 ±0.10	△				△			
DRAWN BY	DATE	SIZE	ANGLE	△							
曾慶根	2022/06/10	A4	0° ±1°	△							
			.0° ±	△							
			SHEET 1/1	△							

CUSTOMER

Conforms to The RoHS Instruction