


APPEARANCE



DFN1006-2L (Bottom View)

PIN CONFIGURATION

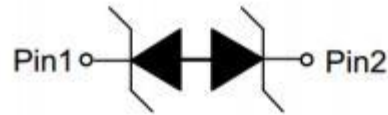

Pin configuration (Top view)

Descriptions

The APED5.0H26-10 is a Bi-directional transient voltage suppressor (TVS) to protect sensitive electronic components from electrostatic discharge (ESD). It is particularly well-suited for cellular phones, PMP, MID, PDA, digital cameras and other electronic equipment. The APED5.0H26-10 is safely dissipating ESD strikes to meet the ESD immunity testing of IEC61000-4-2 ($\pm 30KV$).


The APED5.0H26-10 is available in DFN1006-2L package. Standard products are Pb-free and Halogen-free.

Order information

Device	Package	Shipping
APED5.0H26-10	DFN1006-2L	10000/Tape&Reel

Electrical Parameters (T=25°C)

Symbol	Parameter
VRWM	Reverse Stand-off Voltage
IR	Reverse Leakage Current @ VRWM
VBR	Reverse Breakdown Voltage @ IT
IT	Test Current
IPP	Reverse Peak Pulse Current
VC	Clamping Voltage @ IPP

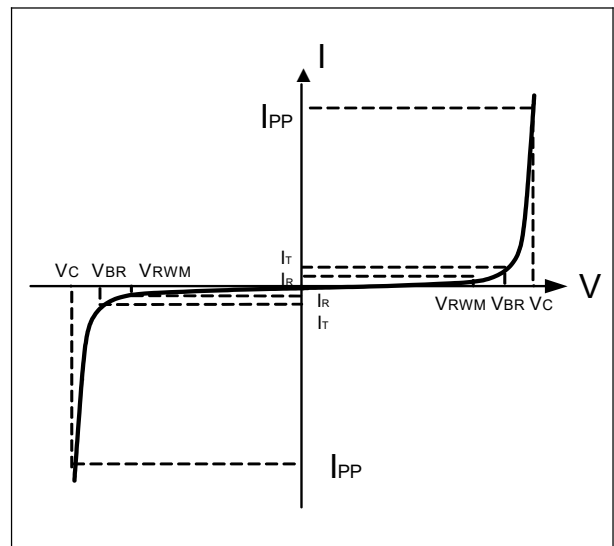


Absolute maximum ratings

Parameter	Symbol	Rating	Unit
Peak pulse power (tp = 8/20μs)	Ppk	360	W
Peak pulse current (tp = 8/20μs)	Ipp	26	A
ESD according to IEC61000-4-2 air discharge	VESD	±30	kV
ESD according to IEC61000-4-2 contact discharge		±30	kV
Junction temperature	TJ	150	°C
Operating temperature	TOP	-55~125	°C
Storage temperature	TSTG	-55~150	°C


Electronics characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min	Typ	Max	Units
Reverse Stand-off Voltage	VRWM				5.0	V
Reverse Breakdown Voltage	VBR	It=1mA	5.6	6.1	8.0	V
Reverse Leakage Current	IR	VRWM=±5.0V			0.1	uA
Clamping Voltage	VC	Ipp=26A, tp=8/20us			14	V
Junction Capacitance	Cj	VR=0V, f=1MHz		58		pF


Typical characteristics (Ta=25°C)

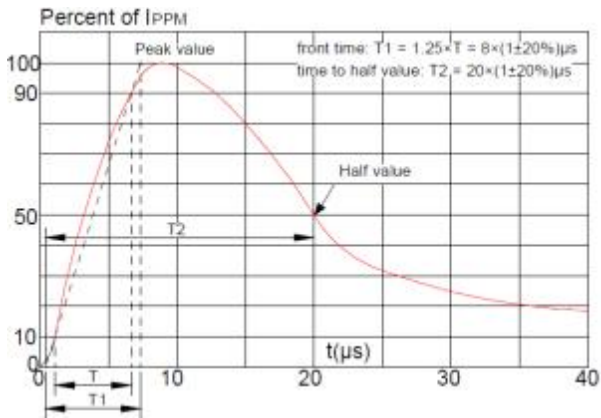

Pulse Waveform (8/20us)

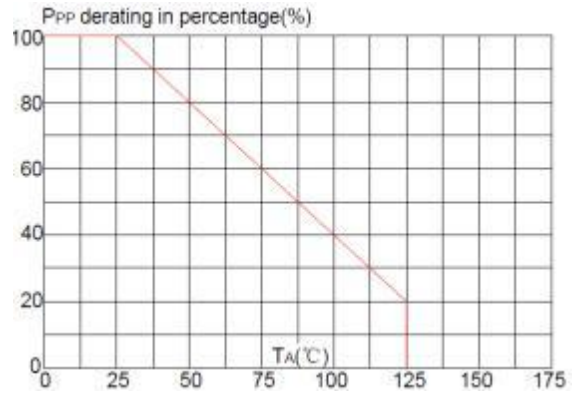


Pulse Derating Curve

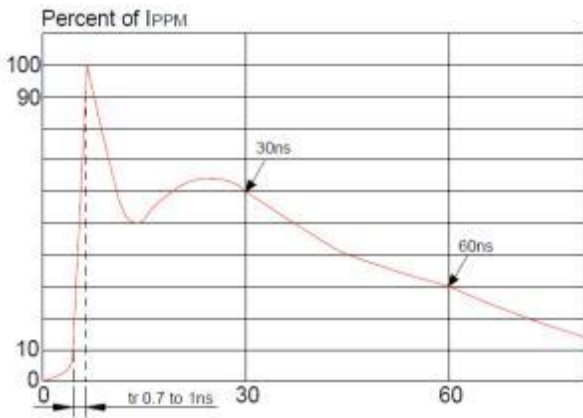


ESD Clamping(8kV Contact Discharge)

PACKAGE OUTLINE DIMENSIONS(DFN1006-2L)

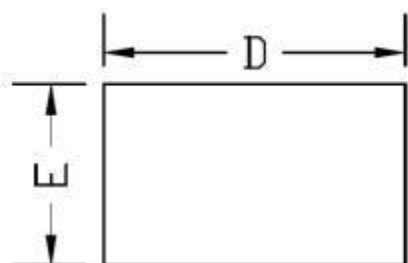

TOP VIEW

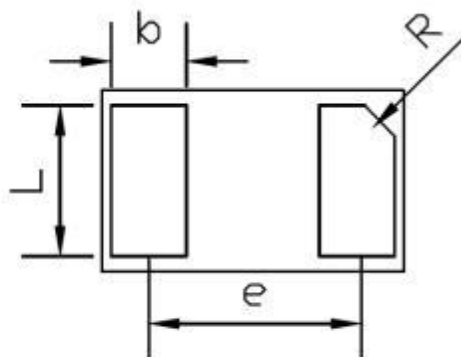

BOTTOM VIEW



SIDE VIEW

COMMON DIMENSION (MM)			
PKG	DFN1006		
REF.	MIN.	NOM.	MAX
A	0.45	0.50	0.55
D	0.95	1.00	1.05
E	0.55	0.60	0.65
b	0.20	0.25	0.30
L	0.45	0.50	0.55
e	0.675		
R	0.07	0.10	0.13

Note:
This recommended land pattern is for reference purpose only.