
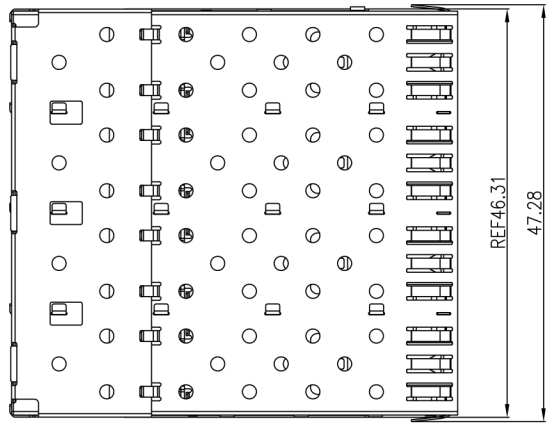





CATEGORY	DESCRIPTION	P/N #
CONNECTOR	SFP 2X4	SFP-024

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A1	———	新訂圖面	WZ	2010.03.20

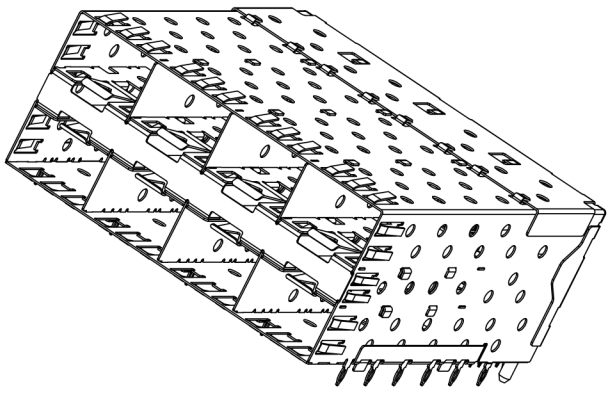

NOTE:

- MATERIAL:
 - HOUSING:LCP (POLYPLASTICS, E130I) WITH 30% GF, UL 94V-0, BLACK COLOR.
 - SPACER:LCP (POLYPLASTICS, E130I) WITH 30% GF, UL 94V-0, BLACK COLOR.
 - CONTACTS:PHOSPHOR BRONZE(C5191),0.20mm THICKNESS,
 - TOP SHELL:PHOSPHOR BRONZE(C5191),0.25mm THICKNESS,
 - MIDDLE SHELL:SUS301,0.25mm THICKNESS,
 - BOTTOM SHELL:BRASS(C2680),0.25mm THICKNESS,
 - BACK SHELL:BRASS(C2680),0.25mm THICKNESS,
- FINISHED
 - CONTACTS: 15u" PLATED ON CONTACT AREA,
 - 2.54mm [100m"] MIN. MATTE-TIN ON SOLDER TAIL,
 - UNDERPLATED 1.27mm [50m"] MIN. NICKEL. ALL OVER
 - TOP SHELL:UNDERPLATED 1.27mm [50m"] MIN. NICKEL. ALL OVER
 - MIDDLE SHELL:UNDERPLATED 1.27mm [50m"] MIN. NICKEL. ALL OVER
 - BPTOM SHELL:UNDERPLATED 1.27mm [50m"] MIN. NICKEL. ALL OVER
 - BACK SHELL:UNDERPLATED 1.27mm [50m"] MIN. NICKEL. ALL OVER

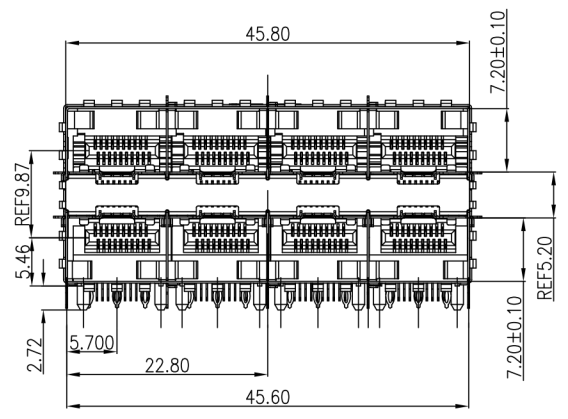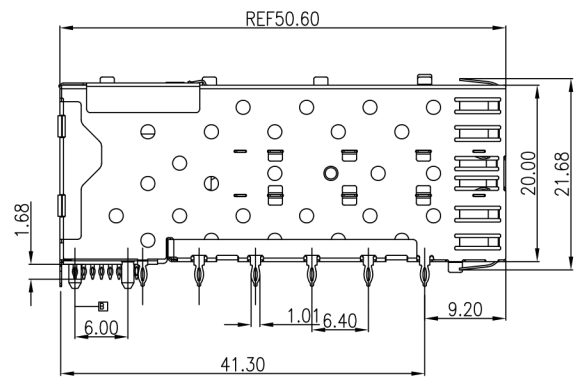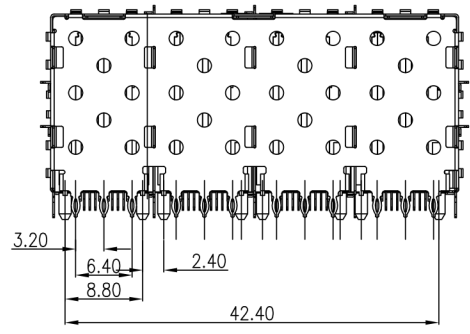

 **贵州省合曜电子科技有限公司**
 Connector GuiZhouSheng HeYao Electronic Technology Co.,Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES	SCALE:1/1	UNIT: mm	DWG.NO: WI-061-234
	SIZE: A3	PAGE:1 OF 3	
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2	ANGLES: X :±1° X.X :±0.5°	APPROVED BY DICK	CHECKED BY XYJ
		PREPARED BY WZ	CUSTOMER COPY