
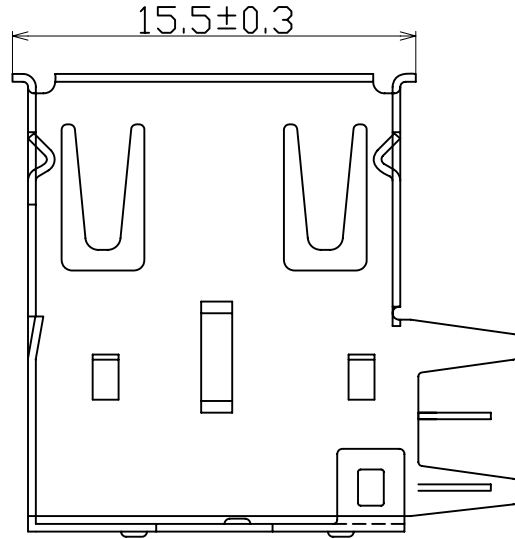
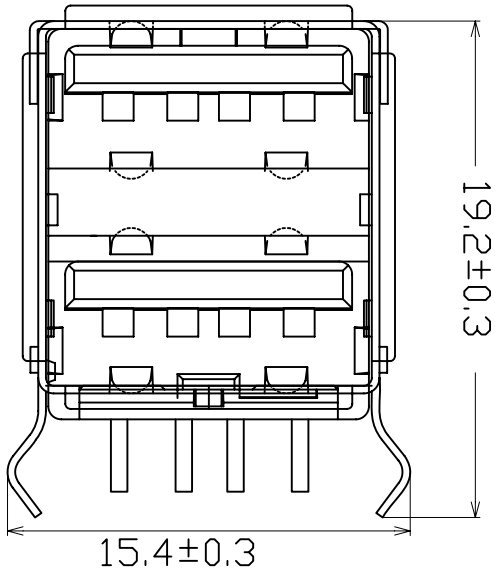


REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			RELEASE TO CUSTOMER	140116	HANG

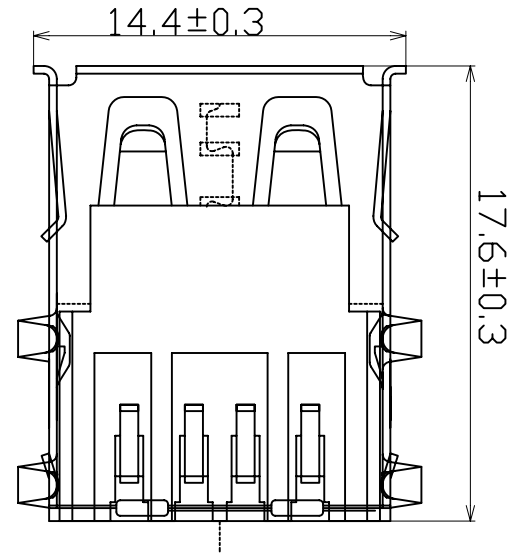


NOTE:

1. MATERIAL:

- a. HOUSING: PBT GLASS FIBRE PBT
- b. CONTACT: PHOSPHOR BRONZE  $T=0.25\text{mm}$   
(SURFACE PLATING:  $\text{Au}1\mu'' + \text{Sn}100\mu'' + \text{Ni}60\mu''$ )
- c. SHEEL: BRASS  $T=0.30\text{mm}$   
(SURFACE PLATING:  $\text{Ni}100\mu'' - 120\mu''$ )

2. ELECTRIC:

- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
- d. OPERATING TEMPERATURE:  $-55^\circ\text{C} - 105^\circ\text{C}$

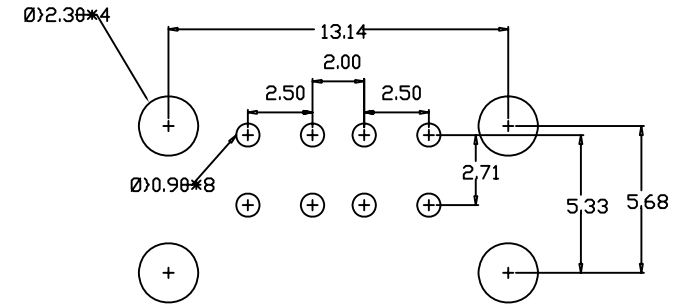

RBCOMMENDBD P. C. B PATTBRN LAY OUT

**LASTAR**

深圳市朗思达科技有限公司

TEL:0755-27157971 FAX:0755-27157976 Http://www.lsdconn.com

DRAW NO.	142-22C-08R3	DATE	DRAW NAME: USB AF DIP90° 双层带后盖 弯脚		
DESIGN	HANG	140116	P/N NO. USB-142-22C-08R3		FILE:
CHECK	WANGCM	140116	UNIT: mm		MODEL:
APPROVED	HUYX	140116	SHEET: N/A	REV. A0	SCALE N/A

DIM	TOL	DIM	TOL
X.	$\pm 0.30$	X".	$\pm 4.0"$
X.X	$\pm 0.25$	X.X"	$\pm 3.0"$
X.XX	$\pm 0.20$	X.XX"	$\pm 2.0"$
X.XXX	$\pm 0.10$	X.XXX"	$\pm 1.0"$

THIS DRAWING CONTAINS INFORMATION THAT IS PROVIDED BY LASTAR TECHNOLOGY AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION